

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	43.45	Hz
3	Re	3.94	Ohms[dc]
4	Res	36.18	Ohms
5	Qms	9.16	
6	Qes	1.00	
7	Qts	0.90	
8	L1	0.56	mH
9	L2	1.15	mH
10	R2	6.89	Ohms
11	RMSE-load	0.46	Ohms
12	Vas(Sd)	268.77	liters
13	Mms	110.71	grams
14	Cms	121	$\mu\text{M}/\text{Newton}$
15	B1	10.92	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1256.64 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.9% (-20% to -50% is recommended).

18" EV FROM ELIMINATOR SUB


MLSSA: Parameters

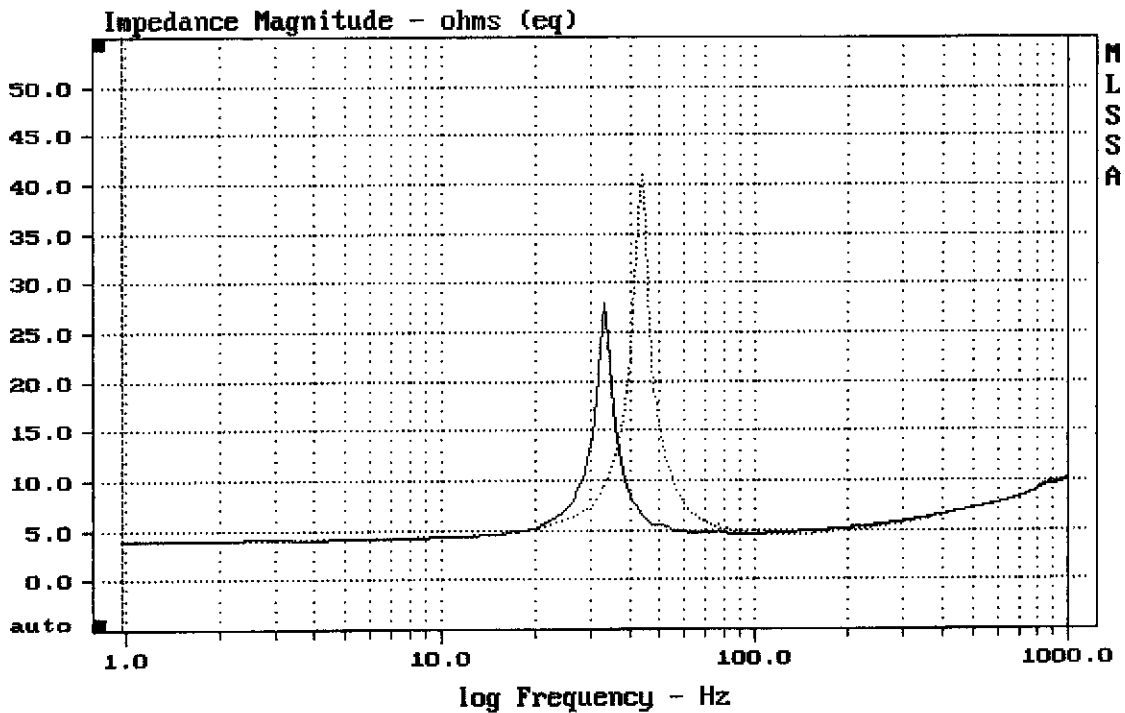

mean: 7.527, rms: 8.004, std: 2.951, max: 41.03, min: 3.994

MLSSA: Frequency Domain


ERP 935

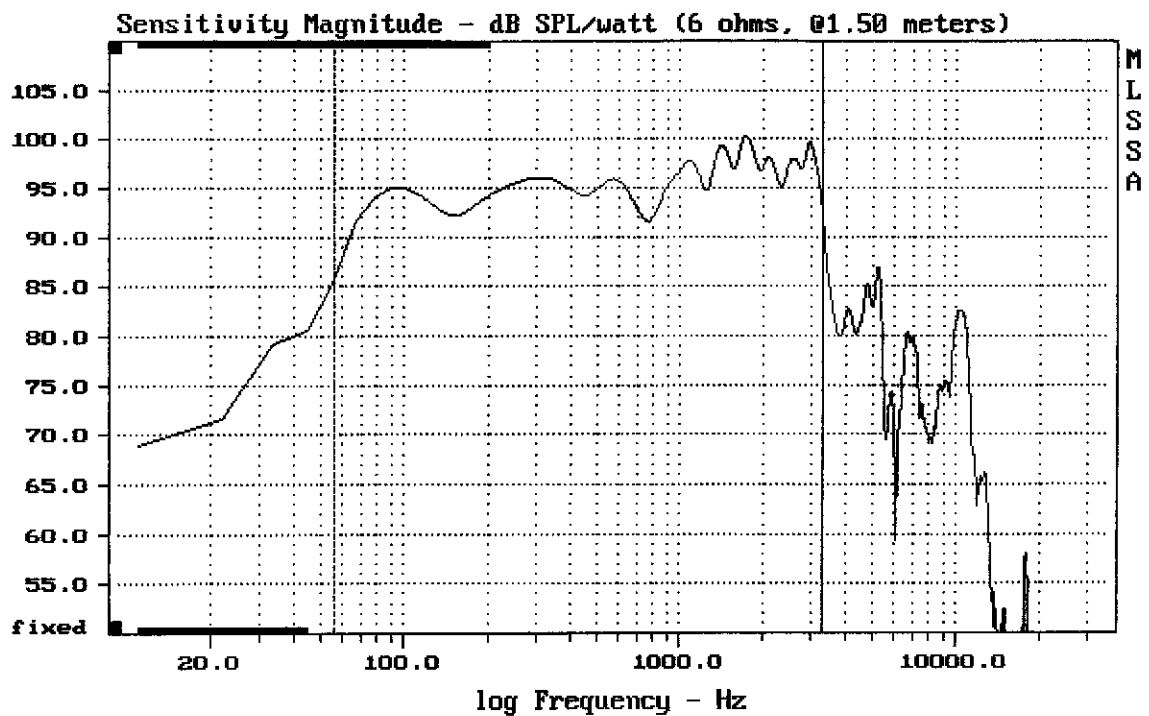

Level (55:3296 Hz) = 95.51 dB SPL/watt (6 ohms, @1.50 meters)

18" EU FROM ELIMINATOR SUB

MLSSA: Frequency Domain

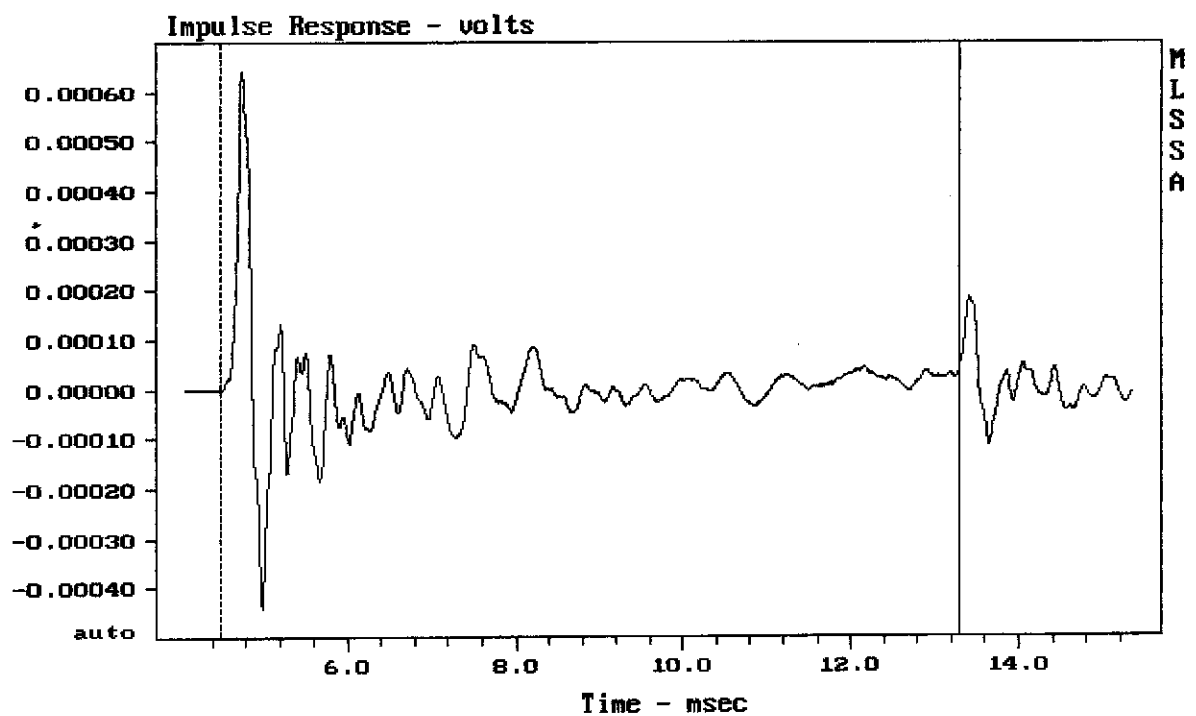

mean: 7.095e-007, rms: 9.37e-005, std: 9.37e-005, max: 0.0006403, min: -0.0004

18" EU FROM ELIMINATOR SUB