

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.66	Ohms
2	Fs	31.93	Hz
3	Re	6.15	Ohms[dc]
4	Res	93.79	Ohms
5	Qms	7.13	
6	Qes	0.47	
7	Qts	0.44	
8	L1	0.46	mH
9	L2	1.18	mH
10	R2	10.05	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	398.29	liters
13	Mms	112.69	grams
14	Cms	220	$\mu\text{M}/\text{Newton}$
15	B1	17.25	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.3% (-20% to -50% is recommended).

D.A.S. 18L


MLSSA: Parameter:

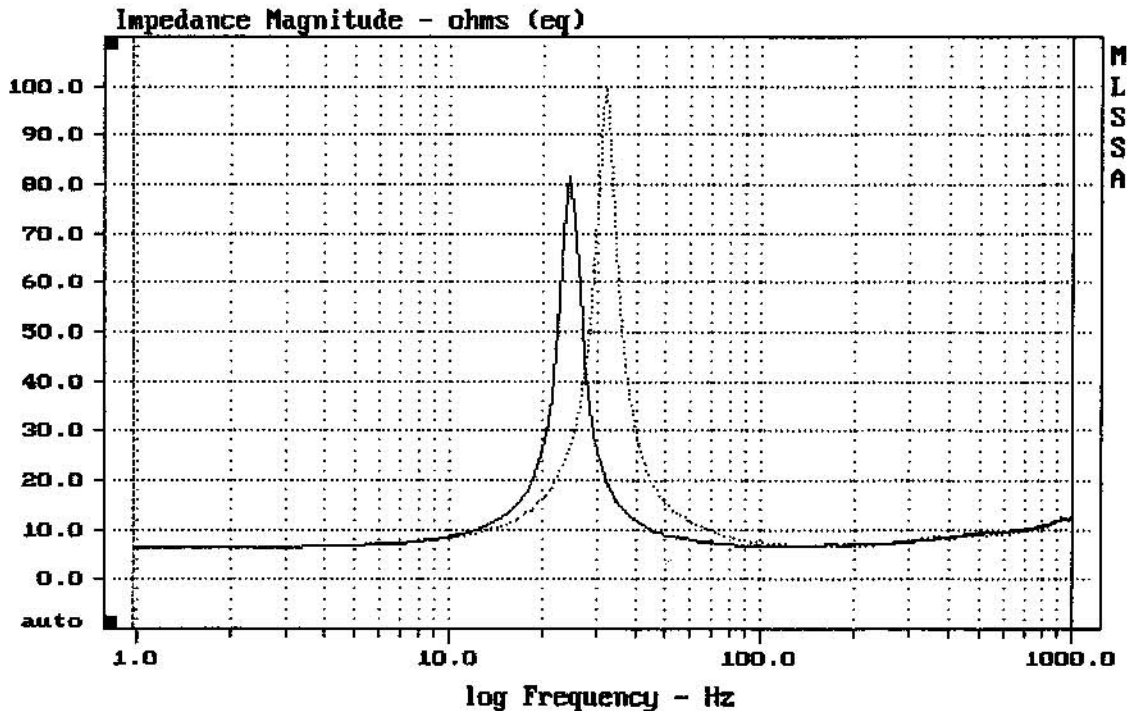

CURSOR: dy = -0.355268 x = 1800.9766 (1825)

DTTO


MLSSA: Frequency Domain

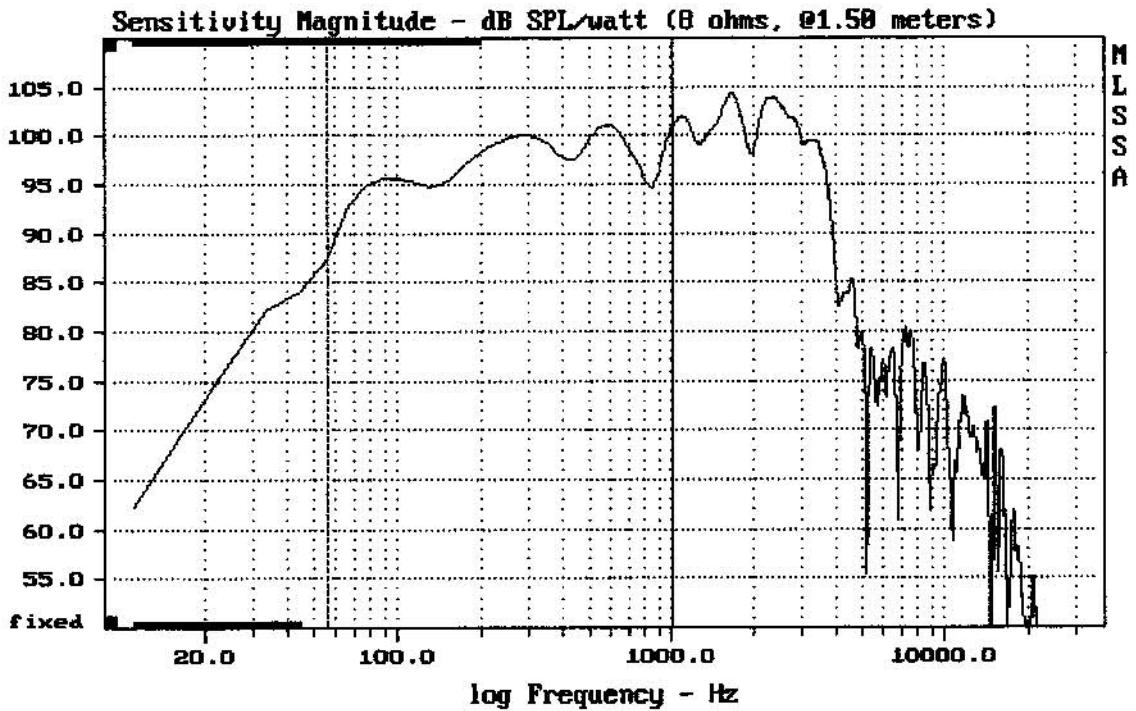

Level (55:1010 Hz) = 97.65 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 18L

MLSSA: Frequency Domain

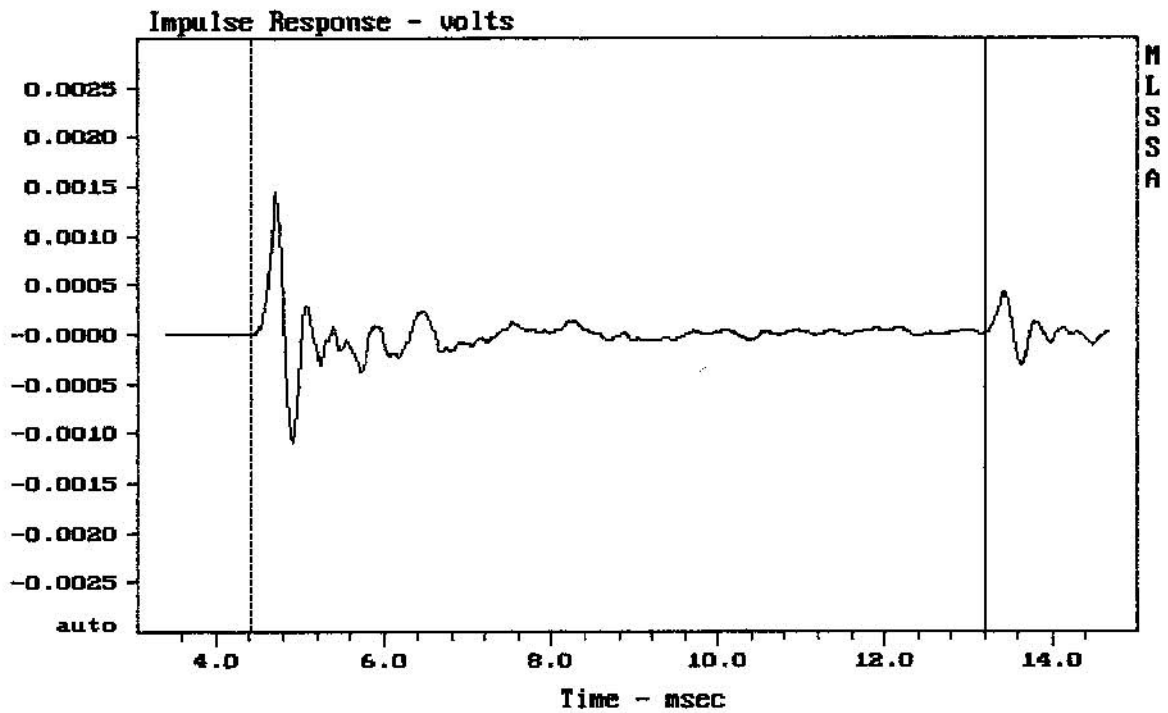

mean: $-7.021e-006$, rms: 0.0002095, std: 0.0002095, max: 0.001432, min: -0.0010

D.A.S. 18L