

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	54.78	Hz
3	Re	5.18	Ohms[dc]
4	Res	87.53	Ohms
5	Qms	5.98	
6	Qes	0.35	
7	Qts	0.33	
8	L1	0.60	mH
9	L2	0.89	mH
10	R2	3.87	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	64.20	liters
13	Mms	52.05	grams
14	Cms	162	$\mu\text{M}/\text{Newton}$
15	B1	16.19	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED


Analysis successful. Shift in Fs = -31.7% (-20% to -50% is recommended).

FANE CLA12-300

MLSSA: Parameters

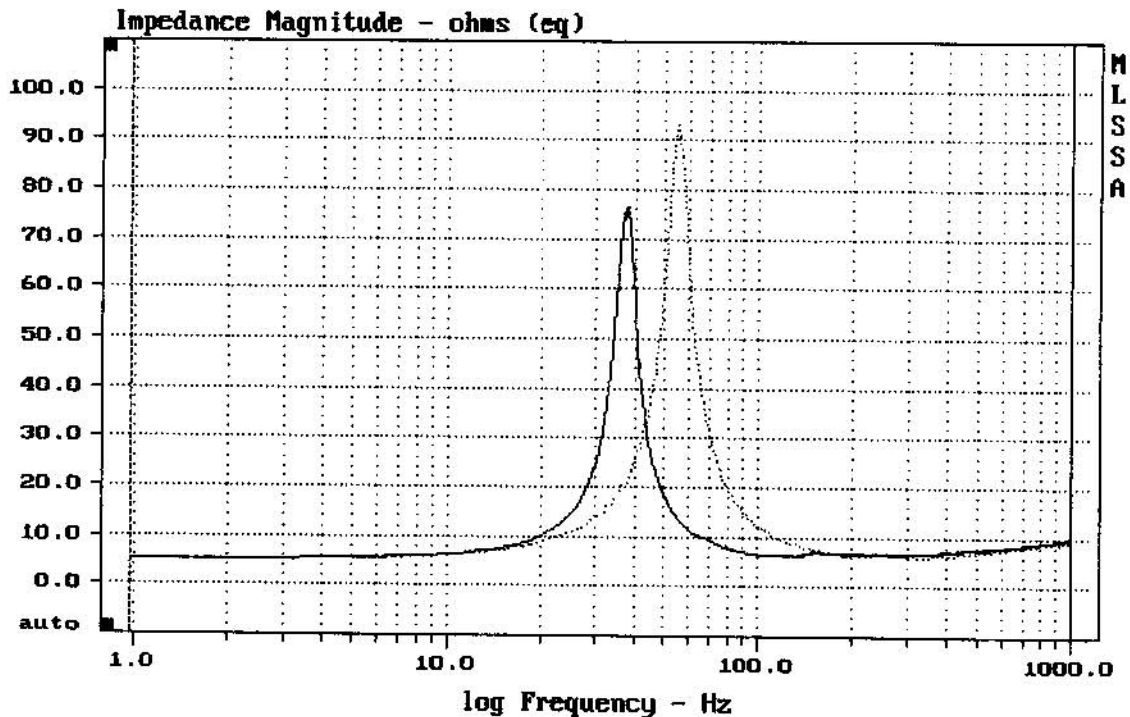


MLSSA: Frequency Domain

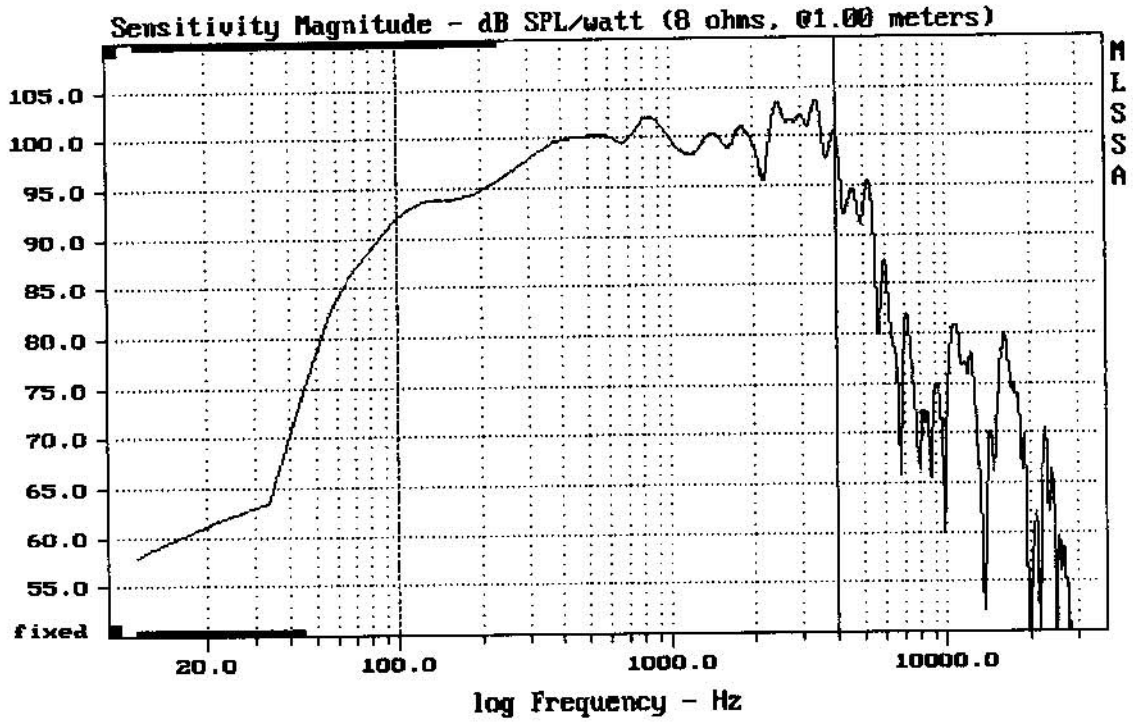

Level (100:4017 Hz) = 99.23 dB SPL/watt (8 ohms, @1.00 meters)

FANE CLA12-300

MLSSA: Frequency Domain

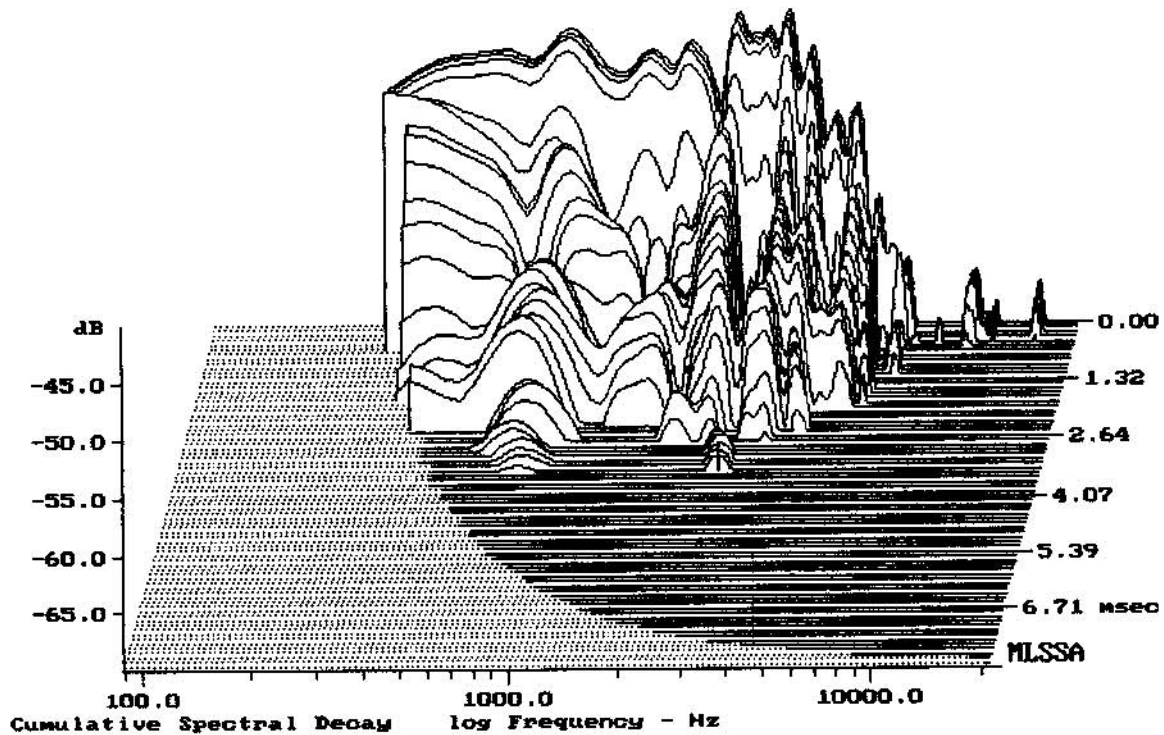

-68.98 dB, 2700 Hz (61), 3.410 msec (32)