

MLSSA SPD 4.W #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	56.45	Hz
3	Re	5.41	Ohms[dc]
4	Res	129.00	Ohms
5	Qms	7.17	
6	Qes	0.30	
7	Qts	0.29	
8	L1	0.77	nH
9	L2	1.18	nH
10	R2	4.10	Ohms
11	RMSE-load	0.57	Ohms
12	Vas(Sd)	92.95	liters
13	Mms	31.33	grams
14	Cms	254	$\mu\text{M}/\text{Newton}$
15	B1	14.14	Tesla-M
16	SPLref(Sd)	99.3	dB[Re]
17	Rub-index	0.00	


Method: Mass-loaded (40.00 grams)  
 DCR mode: Measure (-0.27 ohms)

Area (Sd): 510.71 sq cm  
 QC file: CLOSED

Analysis successful. Shift in Fs = -31.0% (-20% to -50% is recommended).


B+C 12CXB

MLSSA: Parameters

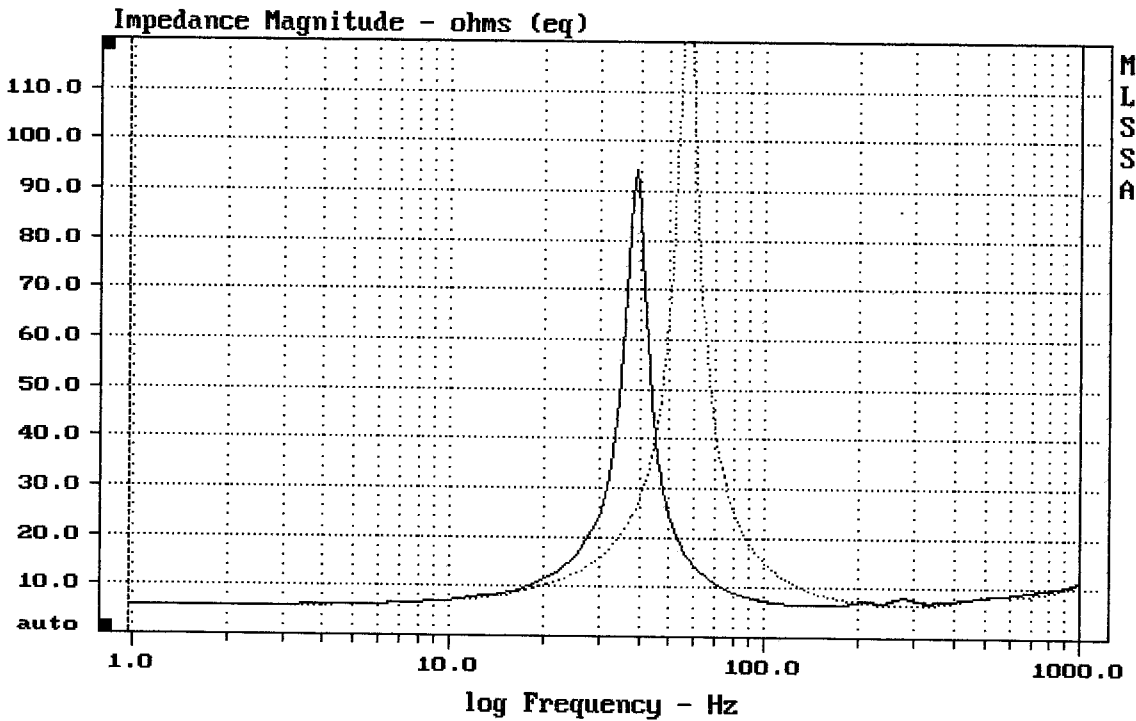

CURSOR: dy = -0.0922222 x = 1000.9766 (1025)

MLSSA: Frequency Domain

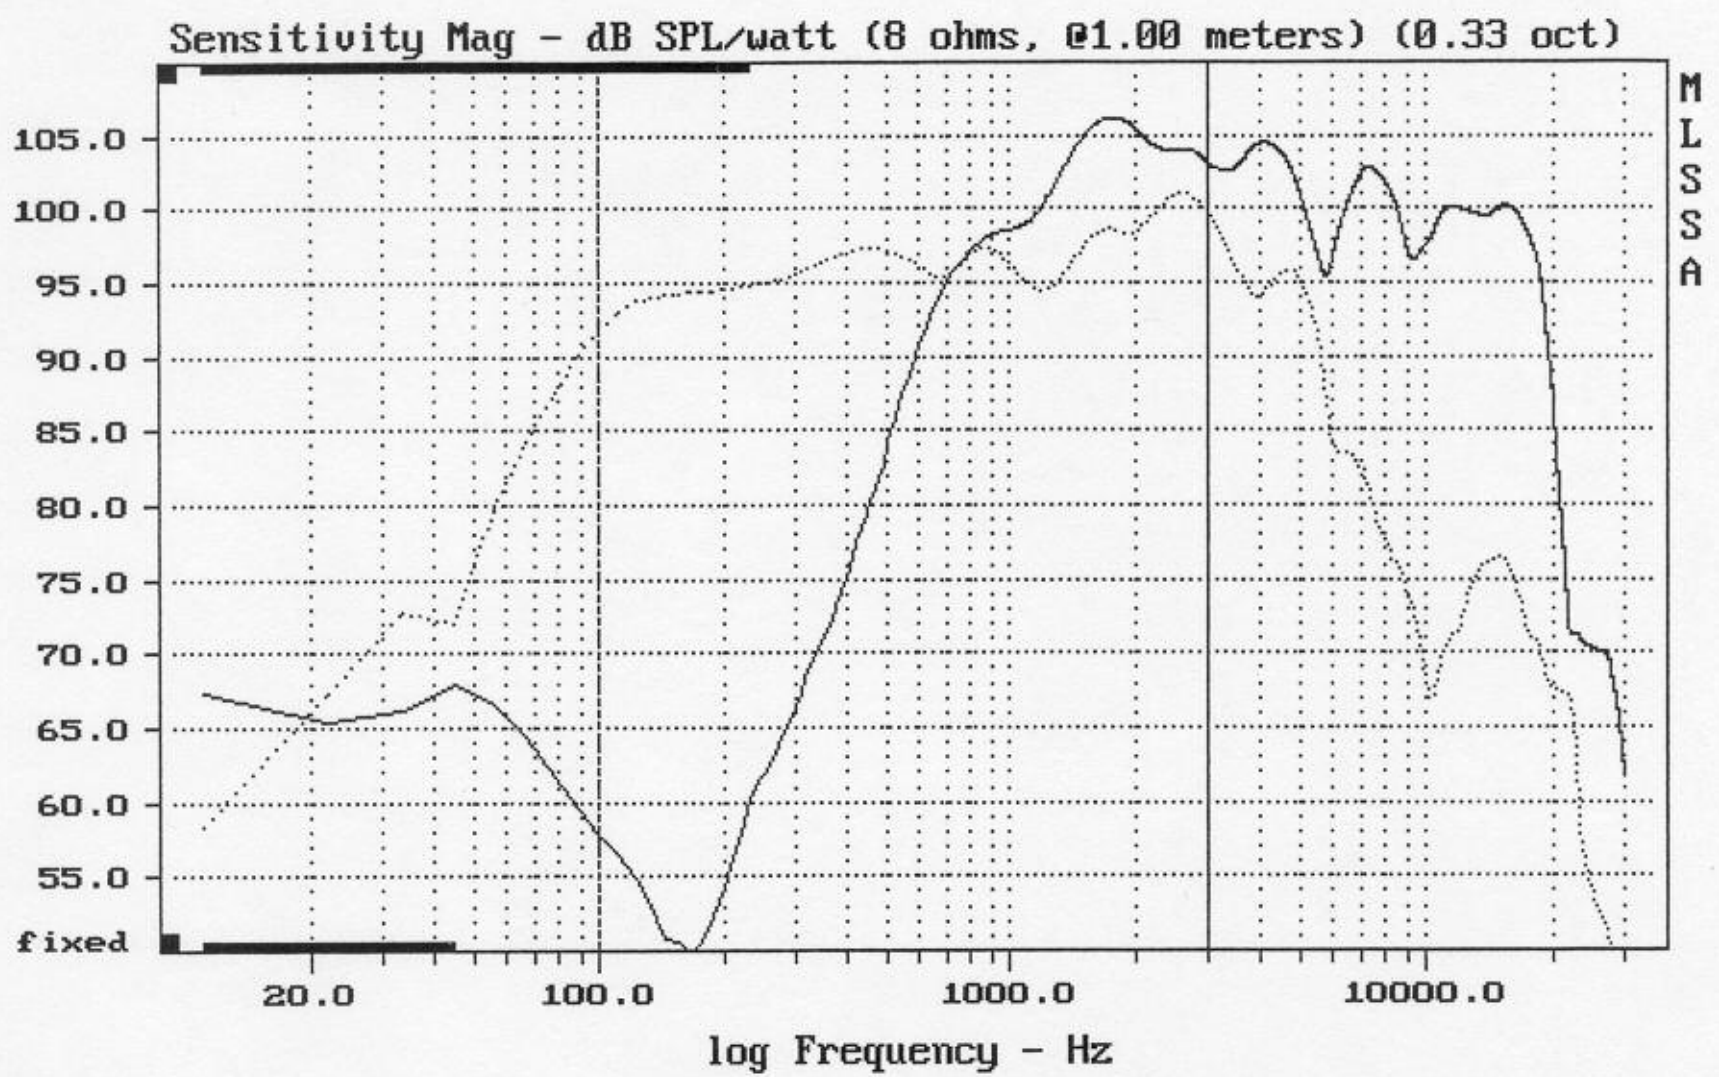


---

Level (100:3007 Hz) = 96.72 dB SPL/watt (8 ohms, @1.00 meters) (0.33 oct)

---

12CXB