

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.56	Ohms
2	Fs	45.44	Hz
3	Re	5.58	Ohms[dc]
4	Res	84.33	Ohms
5	Qms	7.80	
6	Qes	0.52	
7	Qts	0.48	
8	L1	0.49	mH
9	L2	1.29	mH
10	R2	8.31	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	148.79	liters
13	Mms	35.22	grams
14	Cms	348	$\mu\text{M}/\text{Newton}$
15	B1	10.42	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.0% (-20% to -50% is recommended).

EMINENCE BETA 12CX


MLSSA: Parameters

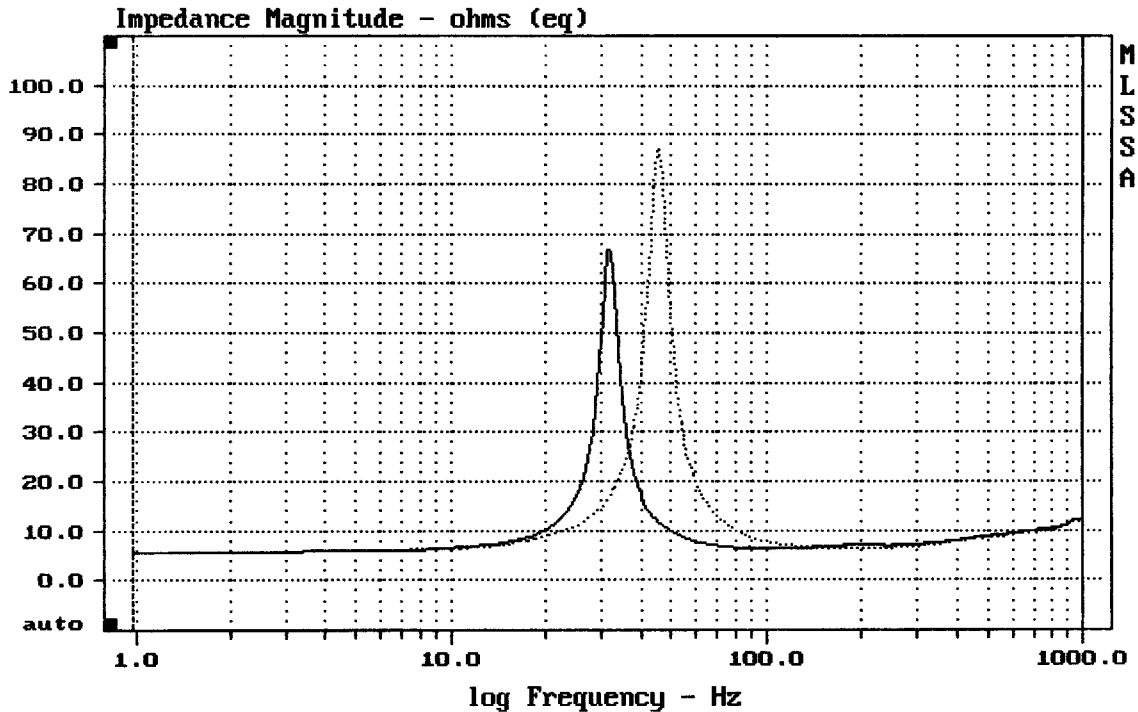

CURSOR:  $dy = -0.55379$   $x = 1000.9766 (1025)$

DTTO

MLSSA: Frequency Domain

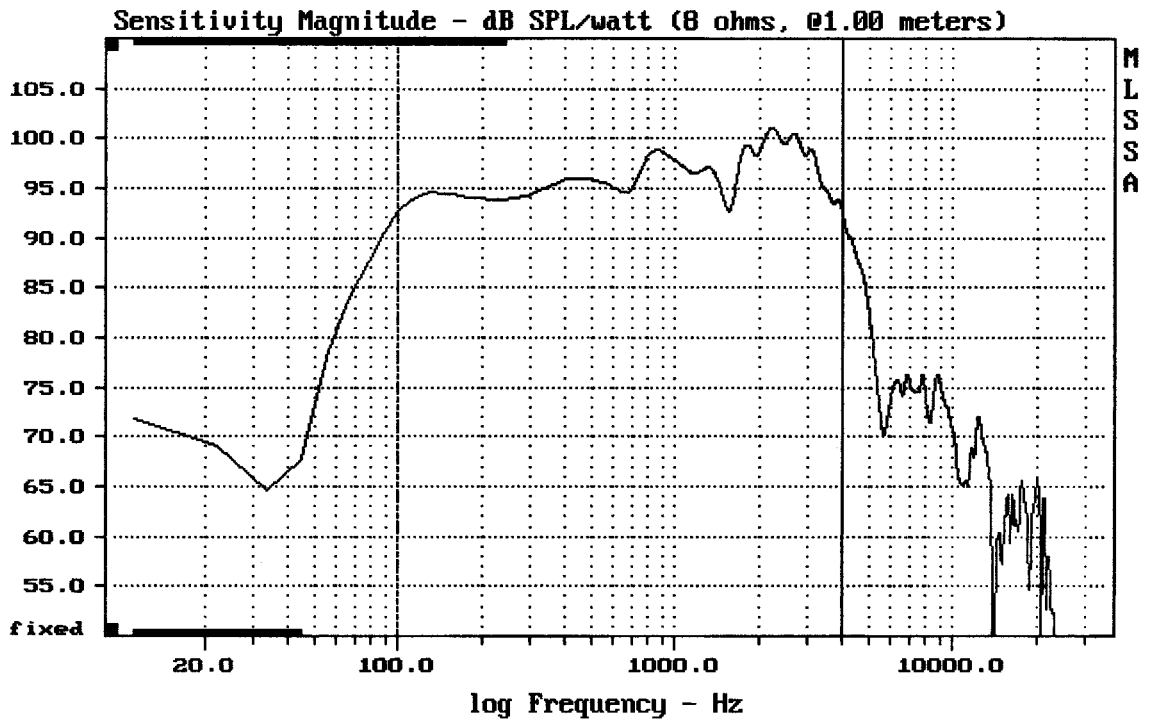



---

Level (100:3995 Hz) = 96.49 dB SPL/watt (8 ohms, @1.00 meters)

---

EMINENCE BETA 12CXL

MLSSA: Frequency Domain

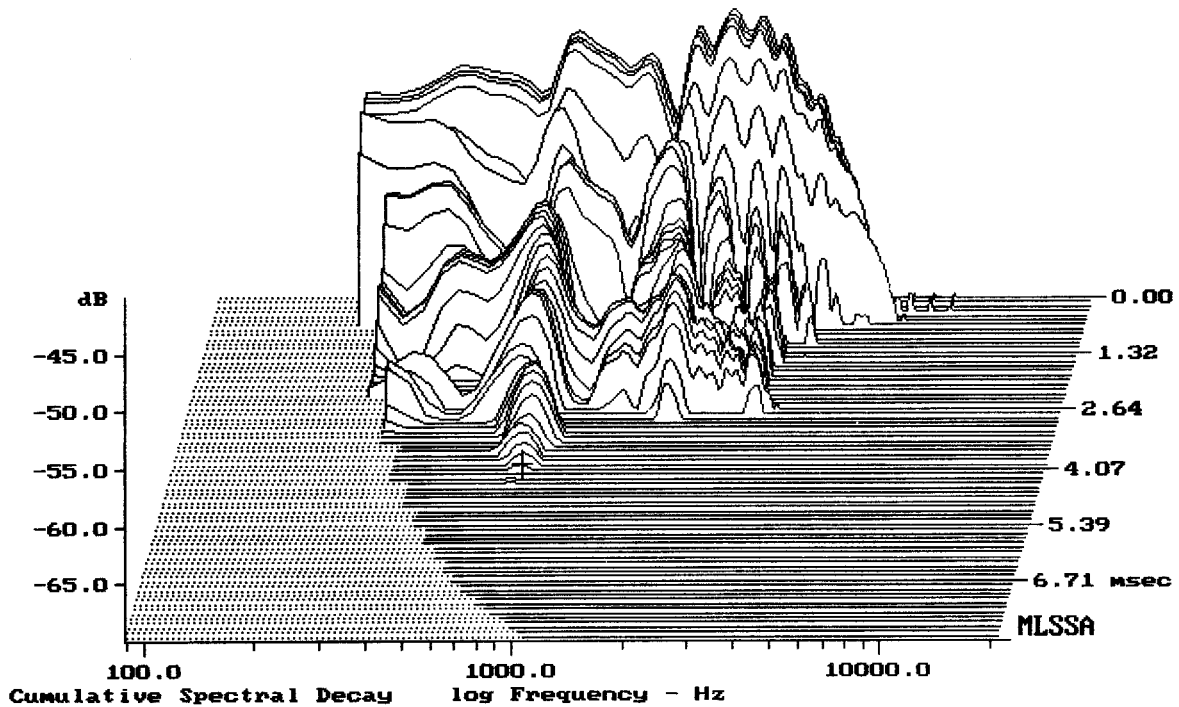

-69.50 dB, 799 Hz (18), 4.070 msec (38)