

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	69.75	Hz
3	Re	6.51	Ohms [dc]
4	Res	43.32	Ohms
5	Qms	4.70	
6	Qes	0.71	
7	Qts	0.61	
8	L1	0.52	mH
9	L2	0.98	mH
10	R2	5.15	Ohms
11	RMSE-load	0.59	Ohms
12	Vas (Sd)	59.48	liters
13	Mms	34.65	grams
14	Cms	150	$\mu$ M/Newton
15	B1	11.83	Tesla-M
16	SPLref (Sd)	96.4	dB [Re]
17	Rub-index	0.01	


Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm

DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.0% (-20% to -50% is recommended).

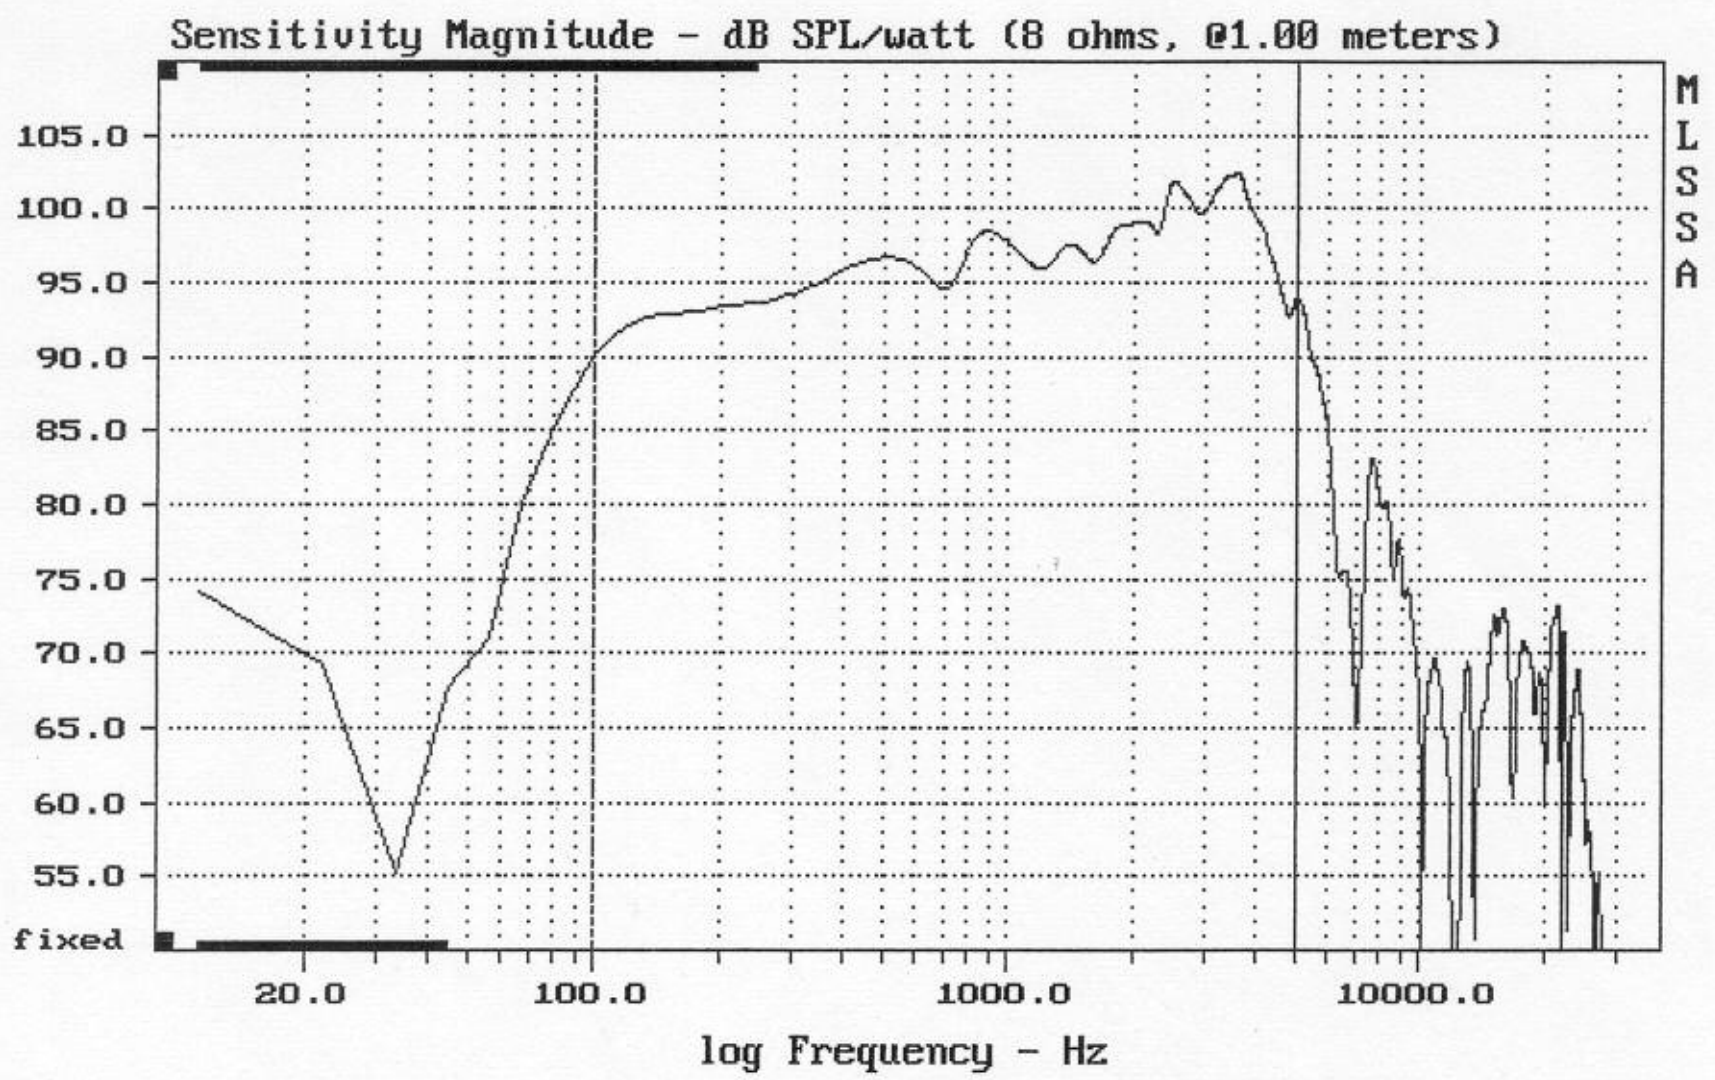


---

Level (100:5005 Hz) = 97.06 dB SPL/watt (8 ohms, @1.00 meters)

---

FANE CLA 12-100