

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.29	Ohms
2	Fs	63.35	Hz
3	Re	6.57	Ohms[dc]
4	Res	64.19	Ohms
5	Qms	8.35	
6	Qes	0.85	
7	Qts	0.78	
8	L1	0.28	mH
9	L2	1.10	mH
10	R2	3.76	Ohms
11	RMSE-load	0.62	Ohms
12	Vas(Sd)	72.14	liters
13	Mms	34.64	grams
14	Cms	182	$\mu\text{M}/\text{Newton}$
15	B1	10.29	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.3% (-20% to -50% is recommended).


CLA12-100TC

MLSSA: Parameters

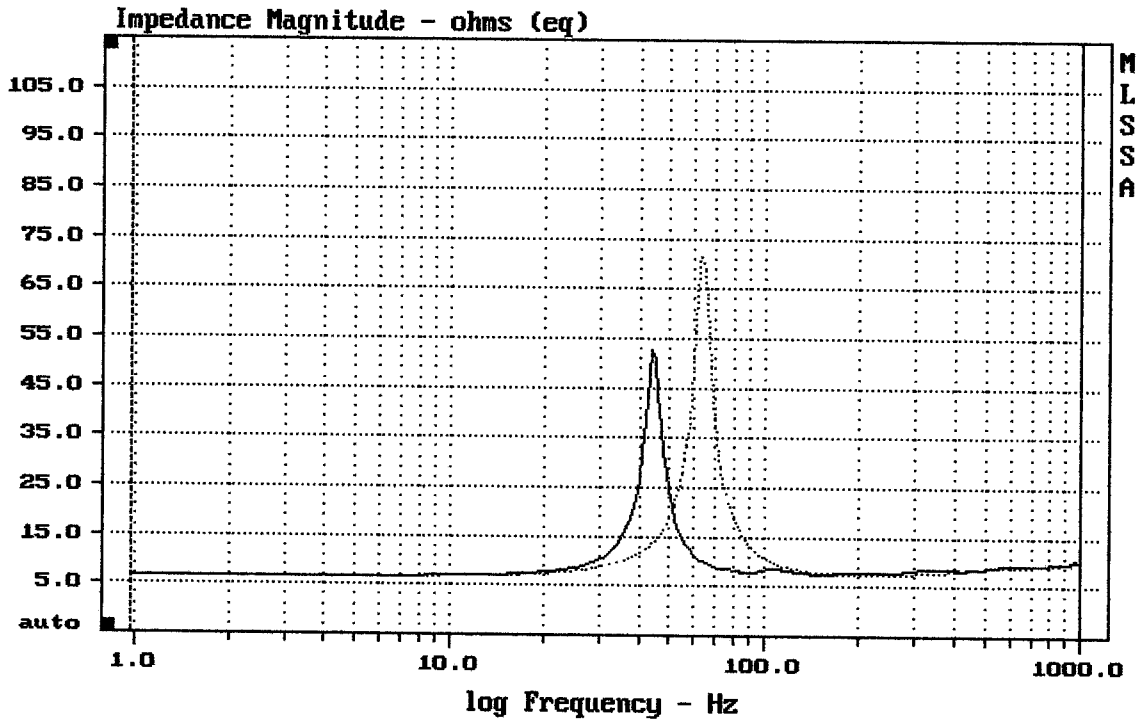


CURSOR: dy = -0.0224524 x = 1000.9766 (1025)

MLSSA: Frequency Domain

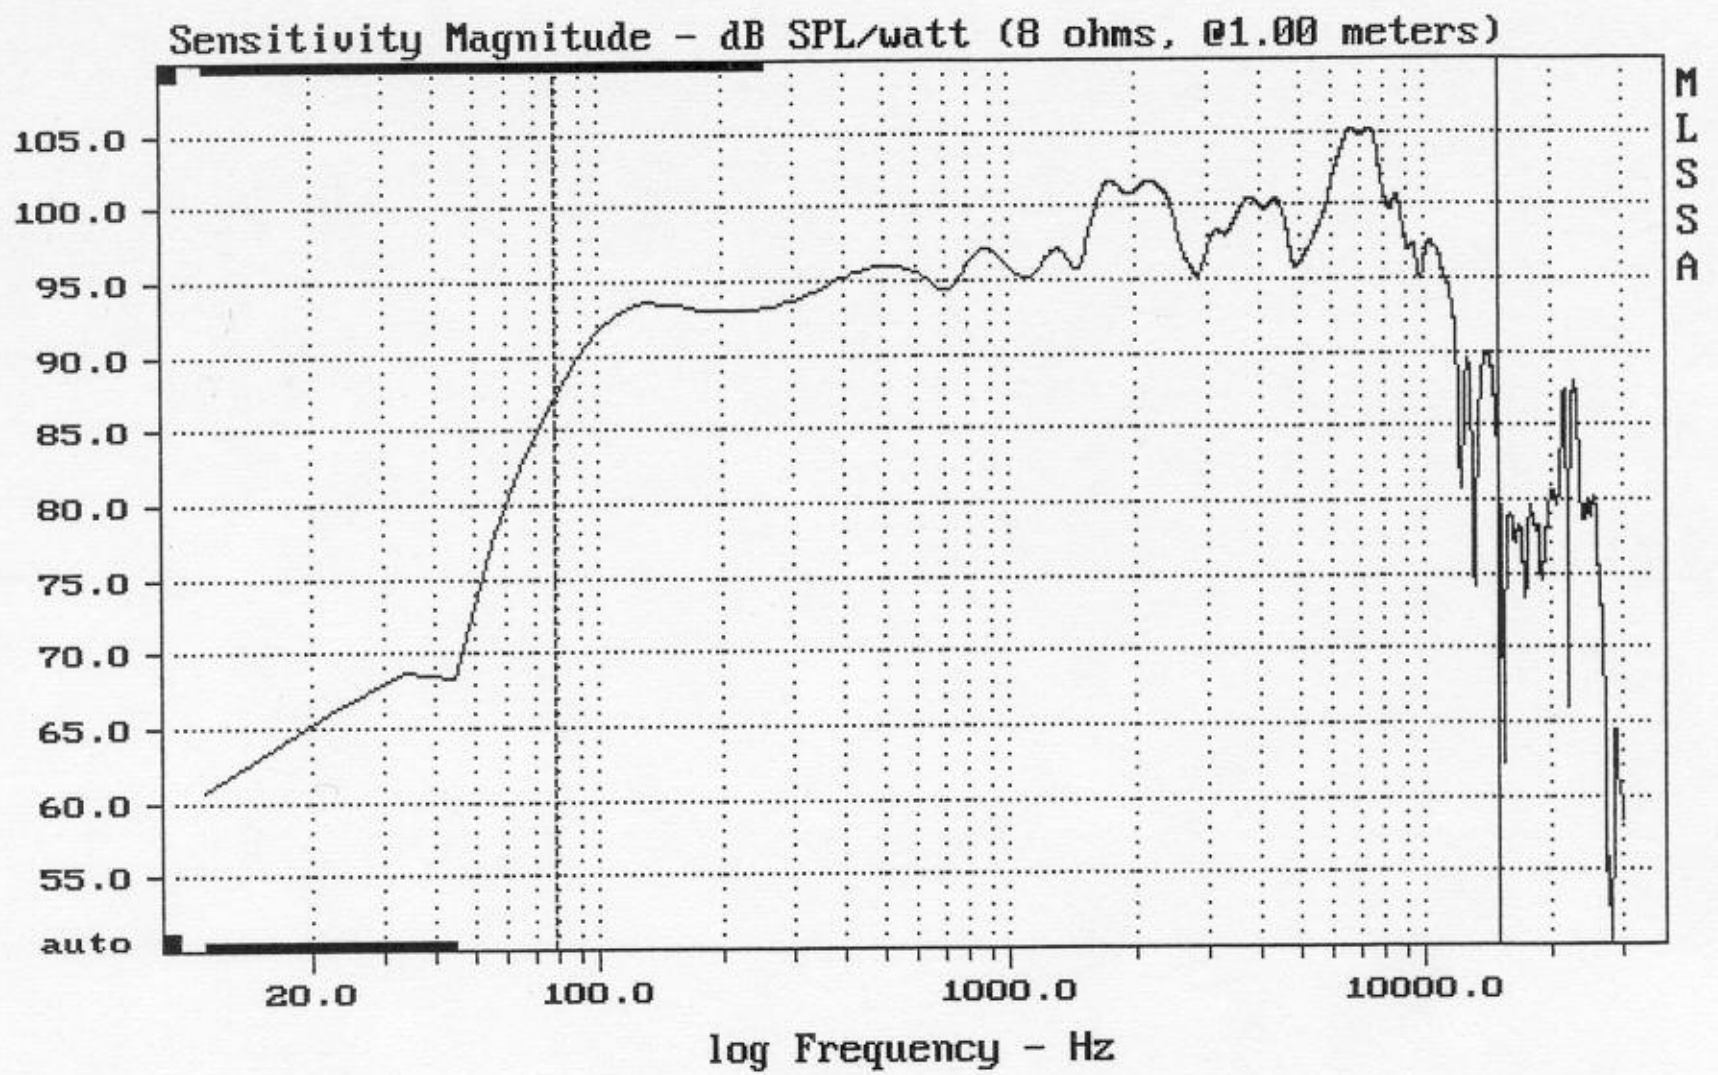

Level (78:15004 Hz) = 97.64 dB SPL/watt (8 ohms, @1.00 meters)

FANE CLA 12-100TC

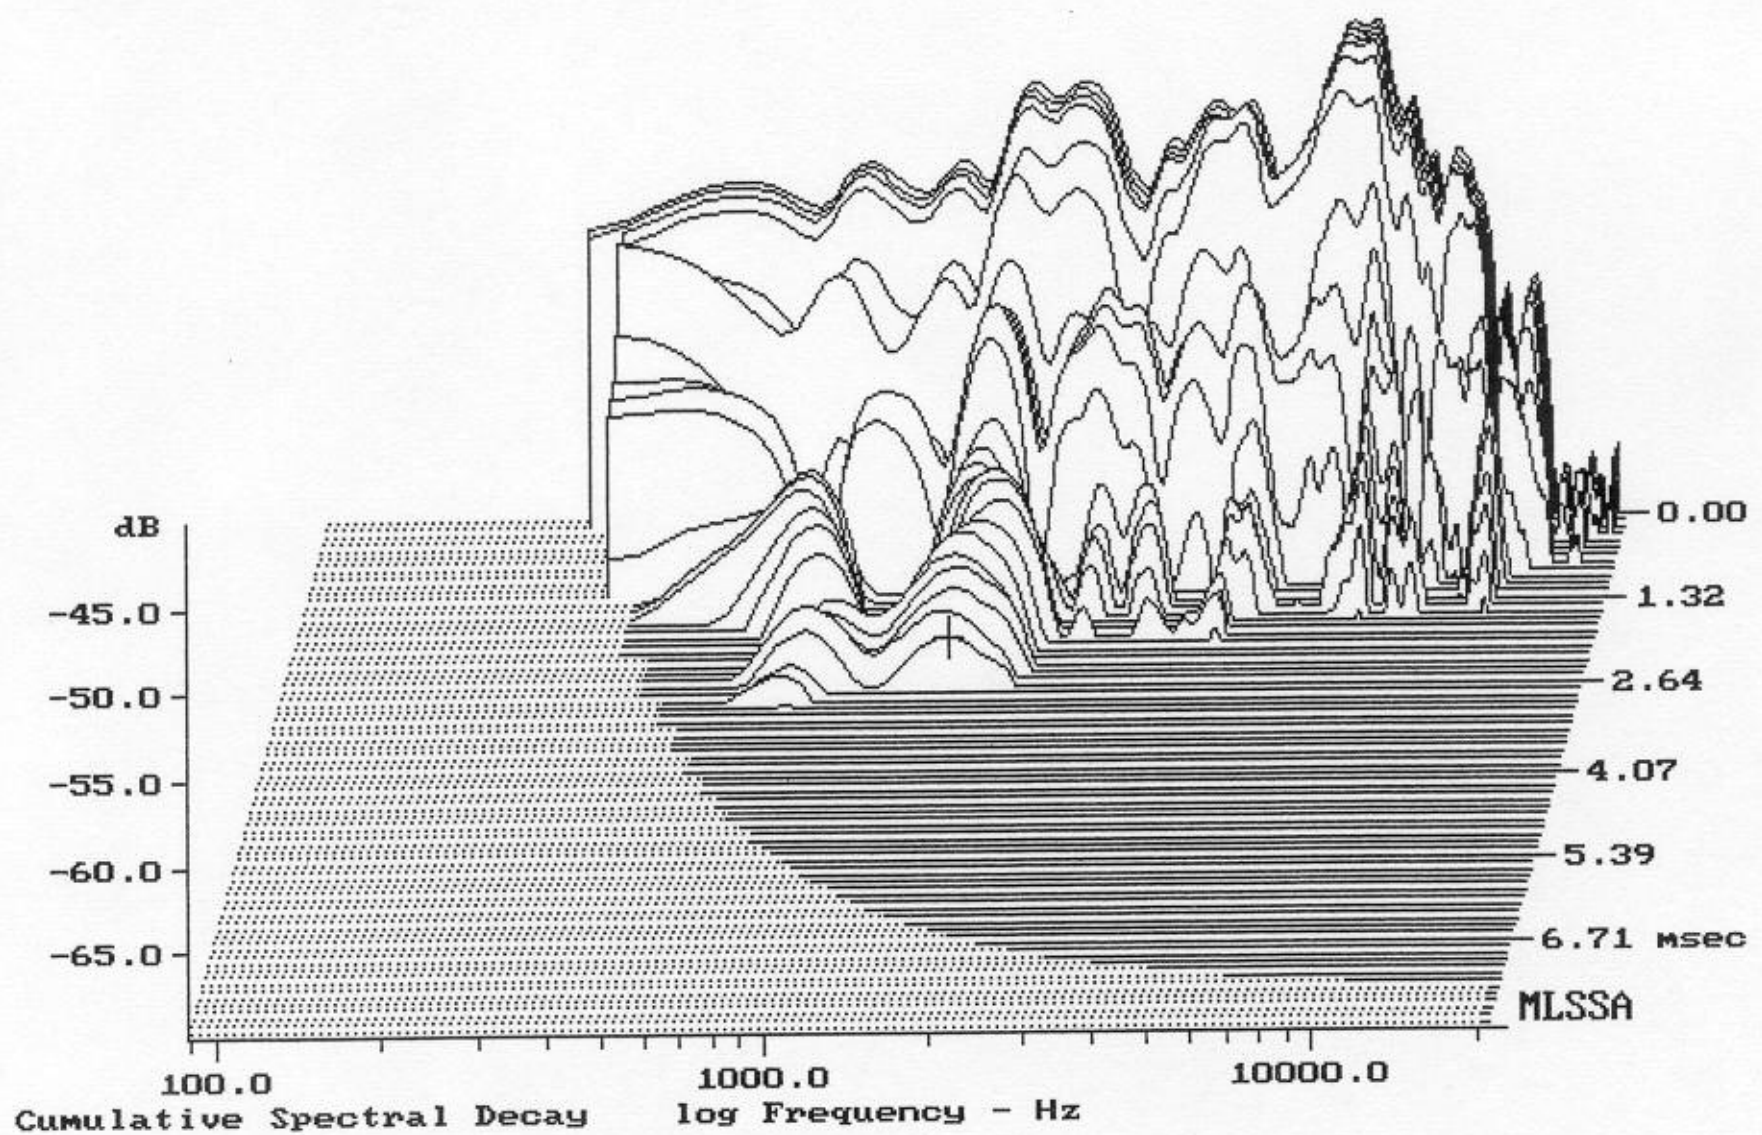

-67.16 dB, 1465 Hz (33), 2.640 msec (25)