

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.22	Ohms
2	Fs	50.36	Hz
3	Re	5.40	Ohms[dc]
4	Res	212.94	Ohms
5	Qms	7.87	
6	Qes	0.20	
7	Qts	0.19	
8	L1	0.62	mH
9	L2	1.66	mH
10	R2	4.89	Ohms
11	RMSE-load	0.61	Ohms
12	Vas(Sd)	78.88	liters
13	Mms	50.13	grams
14	Cms	199	$\mu\text{M}/\text{Newton}$
15	B1	20.72	Tesla-M
16	SPLref(Sd)	98.9	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.9% (-20% to -50% is recommended).

D.A.S. 12-B


MLSSA: Parameters

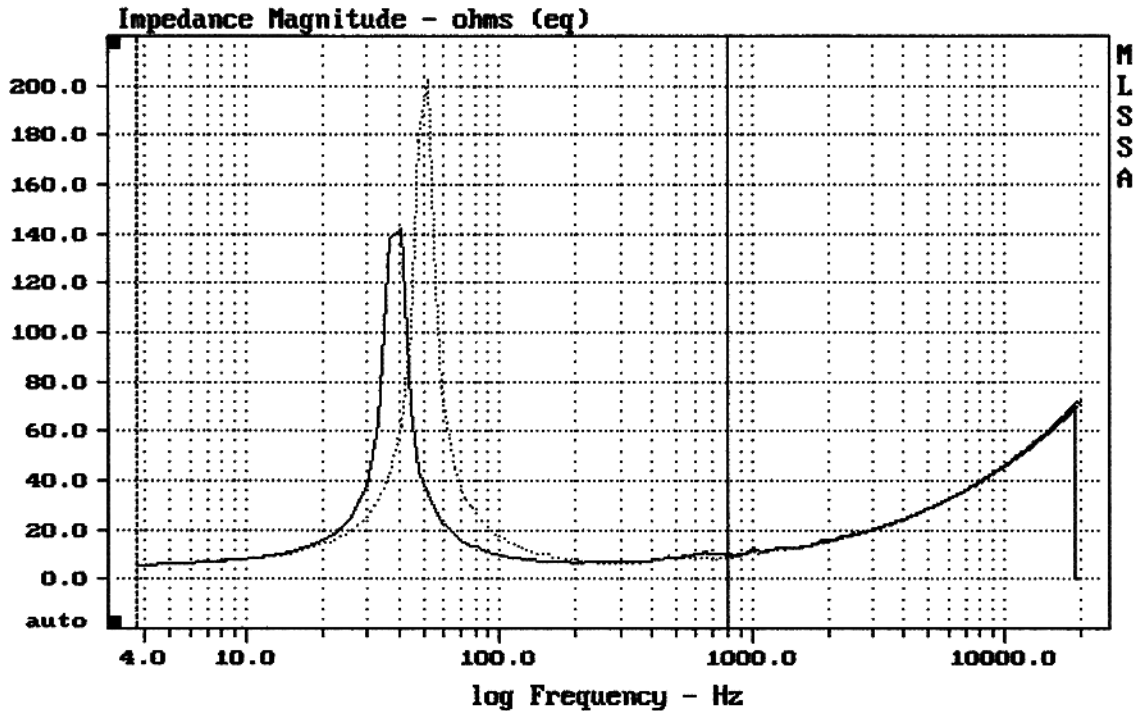

CURSOR: dy = -1.06832 x = 799.0057 (216)

DTTO


MLSSA: Frequency Domain

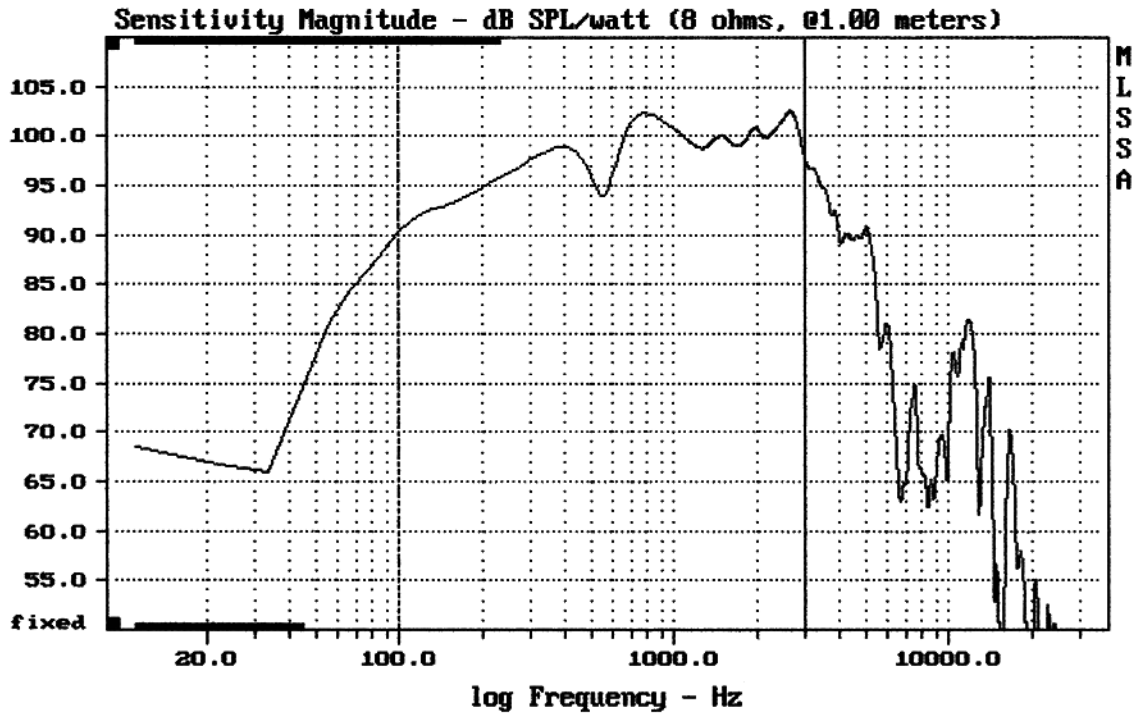

Level (100:2996 Hz) = 98.66 dB SPL/watt (8 ohms, @1.00 meters)

D.A.S. 12B

MLSSA: Frequency Domain

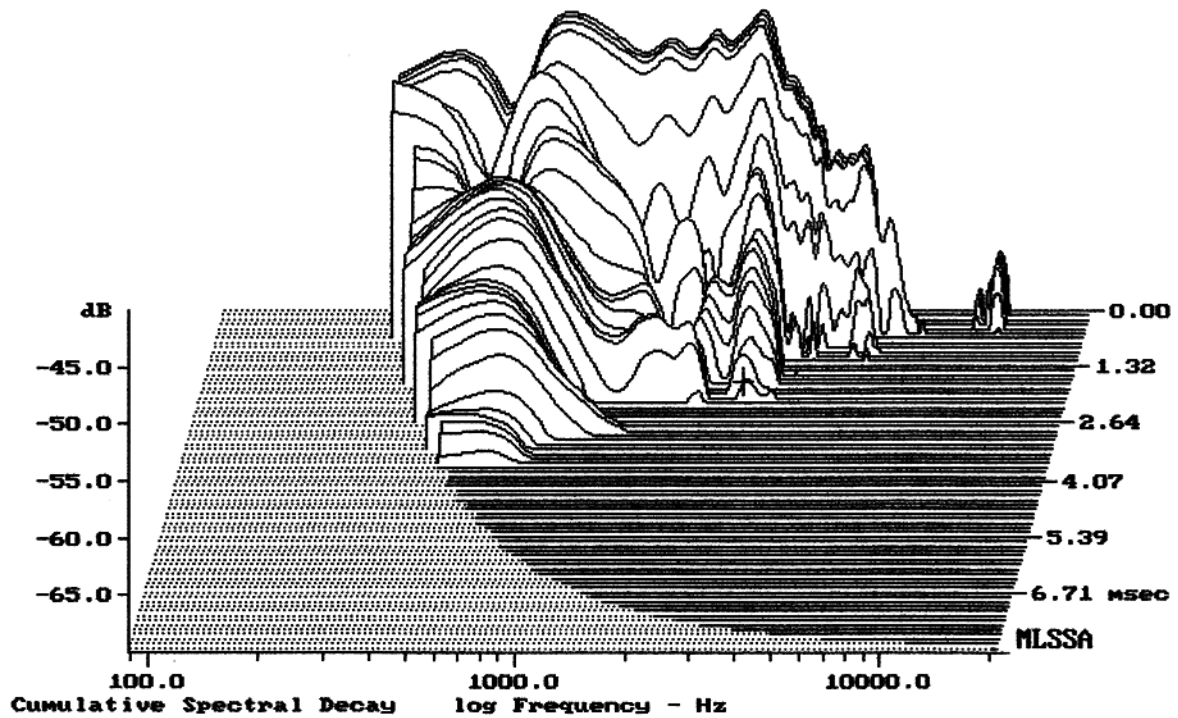

-68.60 dB, 2708 Hz (61), 2.090 msec (20)