

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.25	Ohms
2	Fs	45.54	Hz
3	Re	5.47	Ohms[dc]
4	Res	232.42	Ohms
5	Qms	8.86	
6	Qes	0.21	
7	Qts	0.20	
8	L1	0.63	mH
9	L2	1.14	mH
10	R2	6.27	Ohms
11	RMSE-load	1.03	Ohms
12	Vas(Sd)	84.60	liters
13	Mms	57.14	grams
14	Cms	214	$\mu\text{M}/\text{Newton}$
15	B1	20.71	Tesla-M
16	SPLref(Sd)	97.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.0% (-20% to -50% is recommended).


D.A.S. 12-BN

MLSSA: Parameters

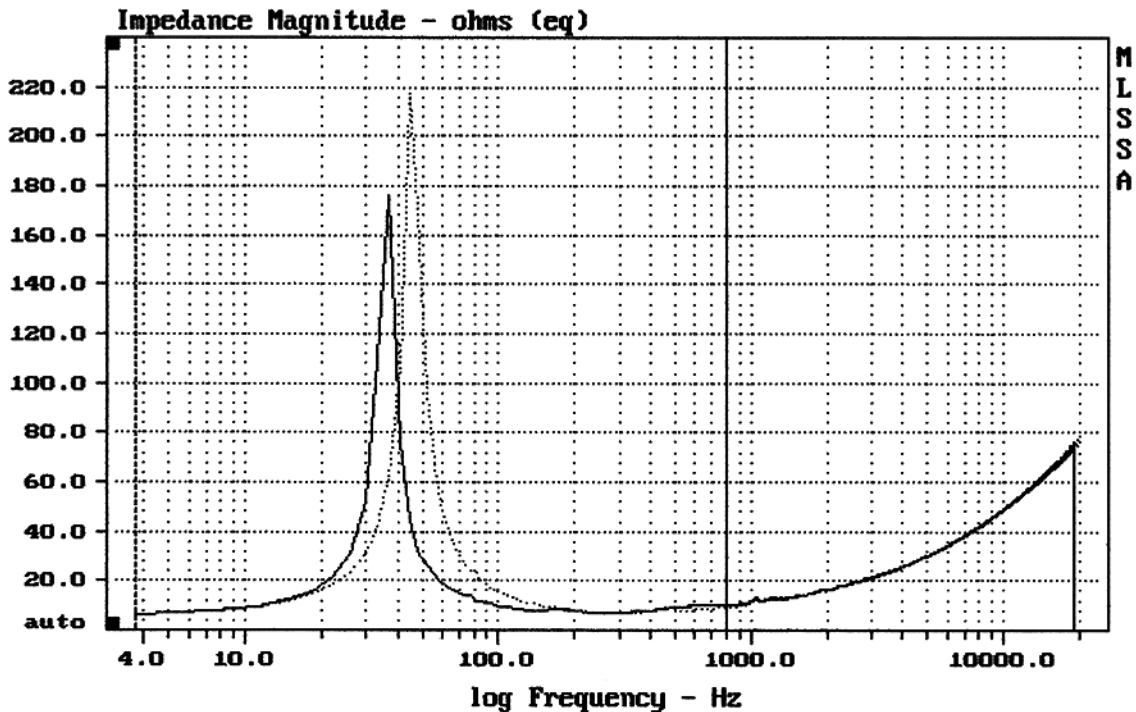

DTTO


MLSSA: Frequency Domain

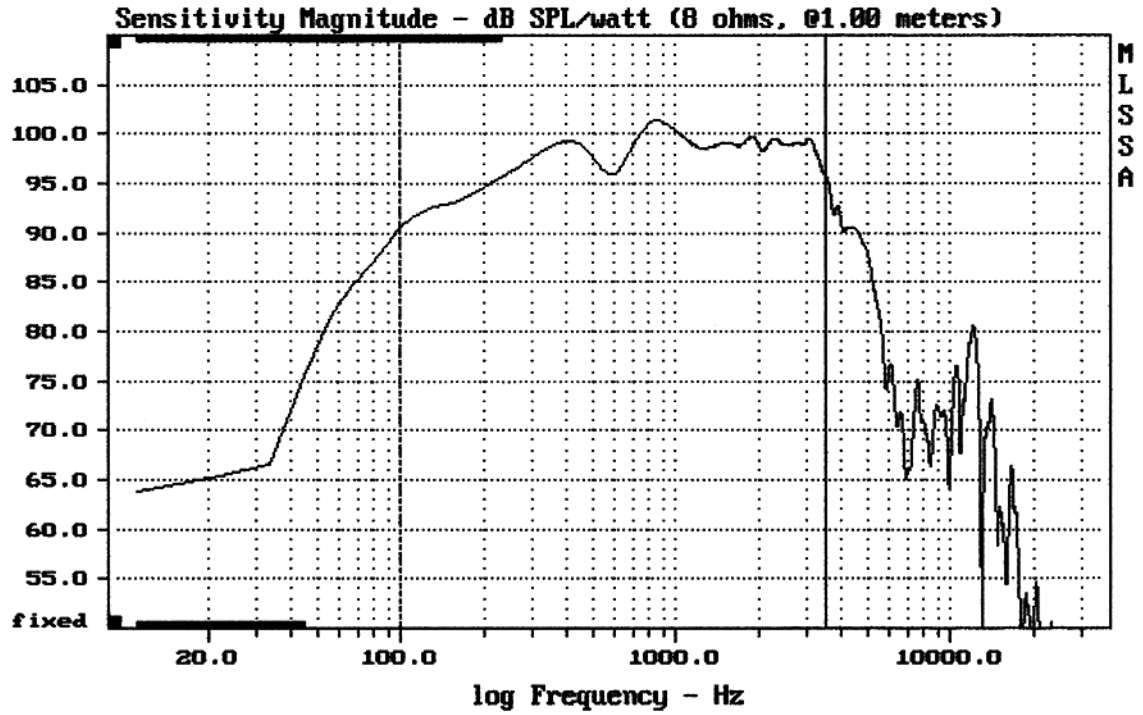

Level (100:3496 Hz) = 97.98 dB SPL/watt (8 ohms, @1.00 meters)

D.A.S. 12BN

MLSSA: Frequency Domain

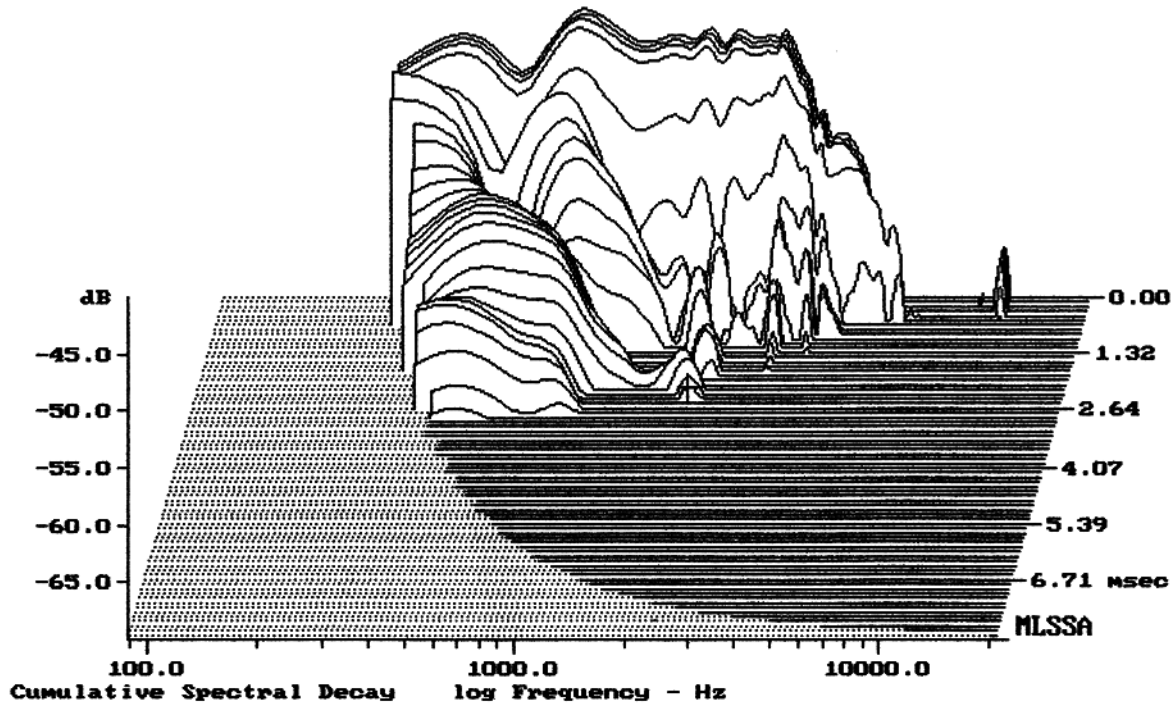

-68.96 dB, 1953 Hz (44), 2.428 msec (23)