

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.53	Ohms
2	Fs	46.28	Hz
3	Re	6.27	Ohms[dc]
4	Res	160.42	Ohms
5	Qms	9.39	
6	Qes	0.37	
7	Qts	0.35	
8	L1	0.87	mH
9	L2	1.06	mH
10	R2	3.97	Ohms
11	RMSE-load	1.80	Ohms
12	Vas(Sd)	103.00	liters
13	Mms	45.45	grams
14	Cms	260	$\mu\text{M}/\text{Newton}$
15	B1	15.03	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.6% (-20% to -50% is recommended).

D.A.S. 12P


MLSSA: Parameters

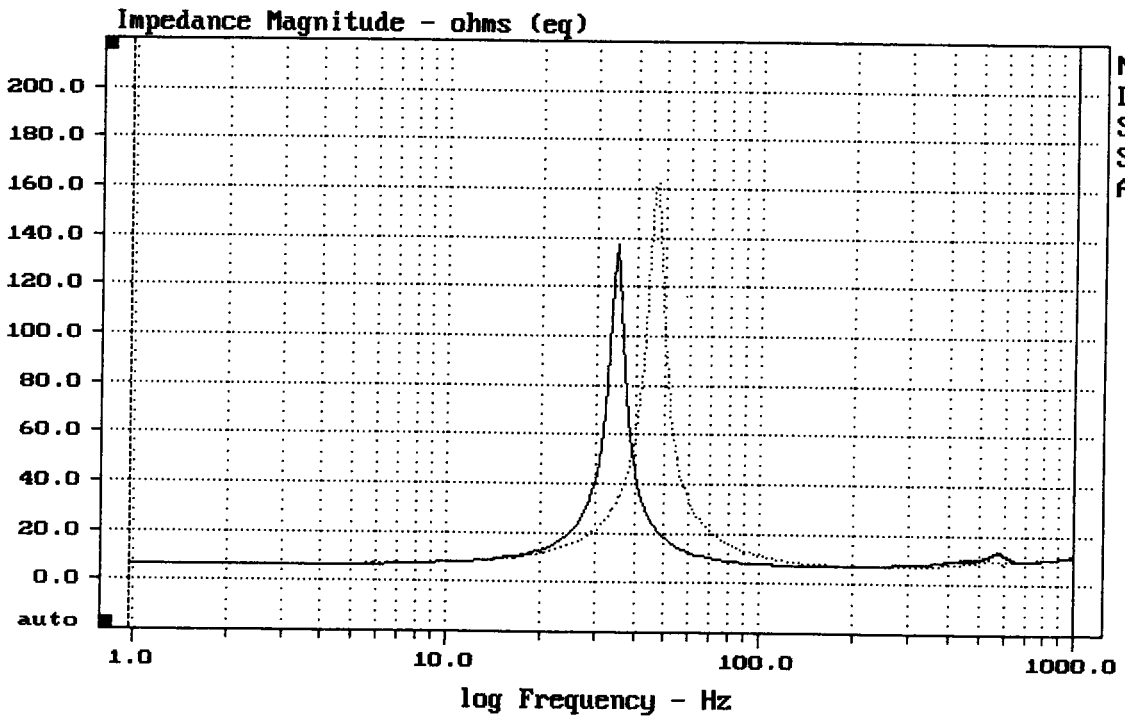

CURSOR: dy = -0.114225 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

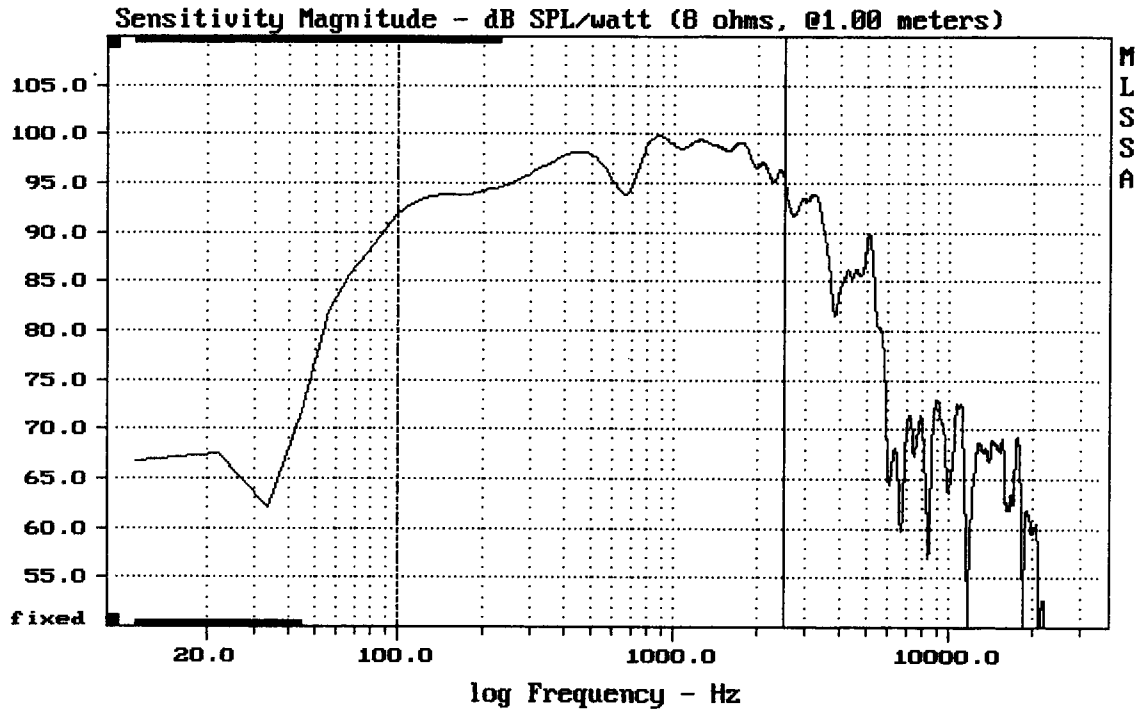

Level (100:2500 Hz) = 96.85 dB SPL/watt (8 ohms, @1.00 meters)

D.A.S. 12P

MLSSA: Frequency Domain

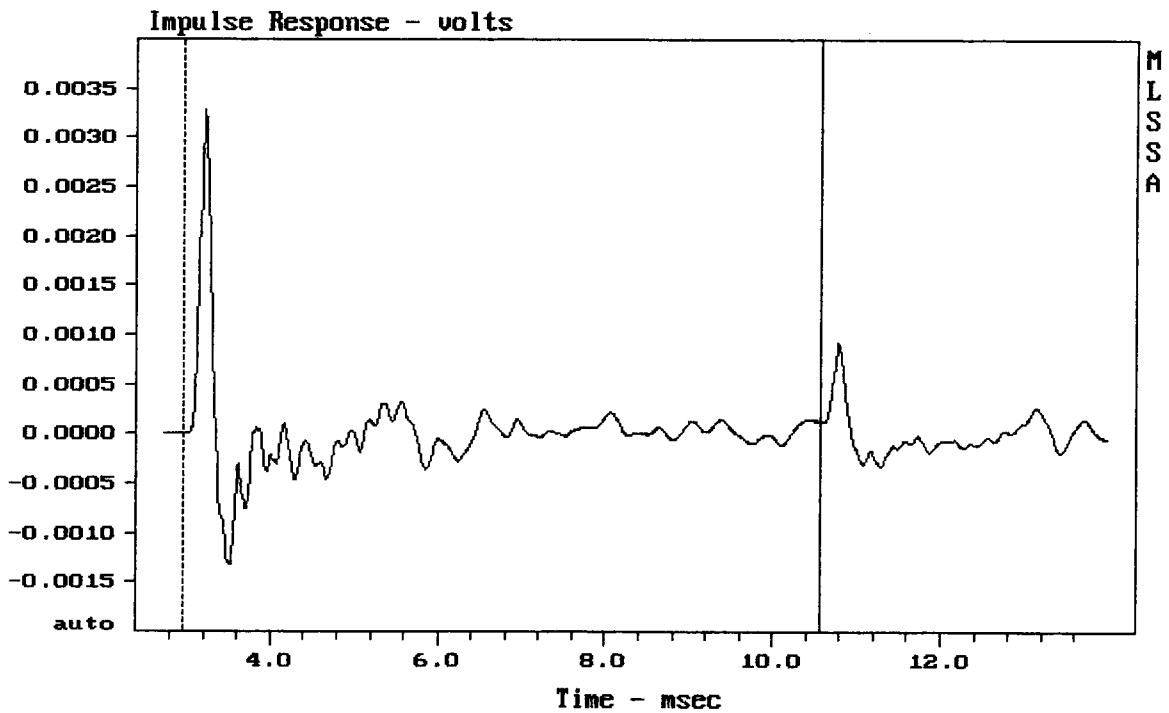

CURSOR: y = 0.000125296 x = 10.5600 (960)

D.A.S. 12P