

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	59.82	Hz
3	Re	6.45	Ohms[dc]
4	Res	92.29	Ohms
5	Qms	7.26	
6	Qes	0.51	
7	Qts	0.47	
8	L1	0.63	mH
9	L2	0.96	mH
10	R2	3.72	Ohms
11	RMSE-load	0.90	Ohms
12	Vas(Sd)	80.93	liters
13	Mms	33.22	grams
14	Cms	213	$\mu\text{M}/\text{Newton}$
15	B1	12.60	Tesla-M
16	SPLref(Sd)	97.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 520.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

EMINENCE DELTA 12


MLSSA: Parameters

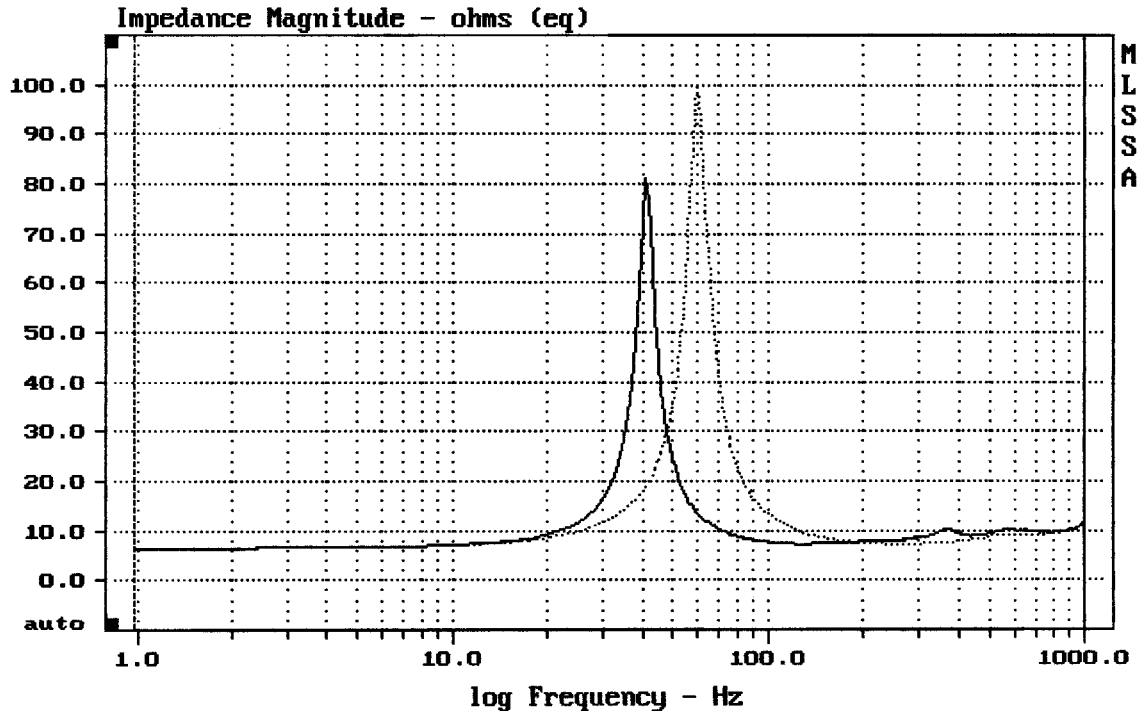

CURSOR: dy = -0.39503 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

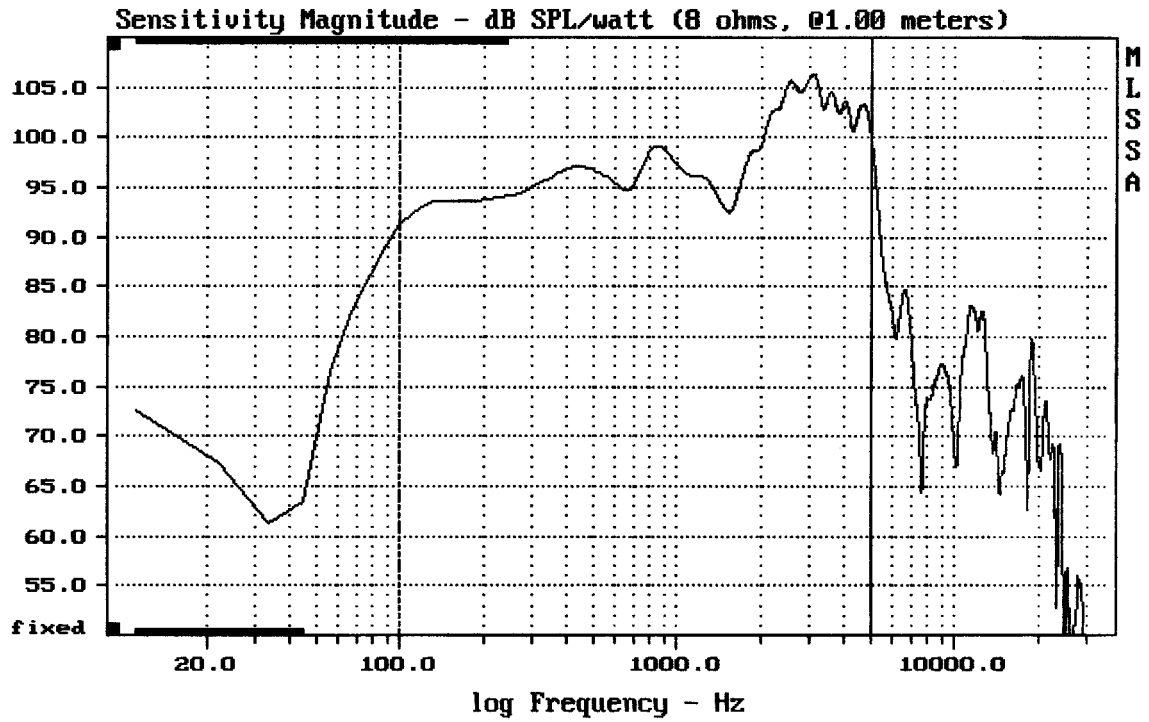

Level (100:5027 Hz) = 99.22 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE DELTA 12

MLSSA: Frequency Domain

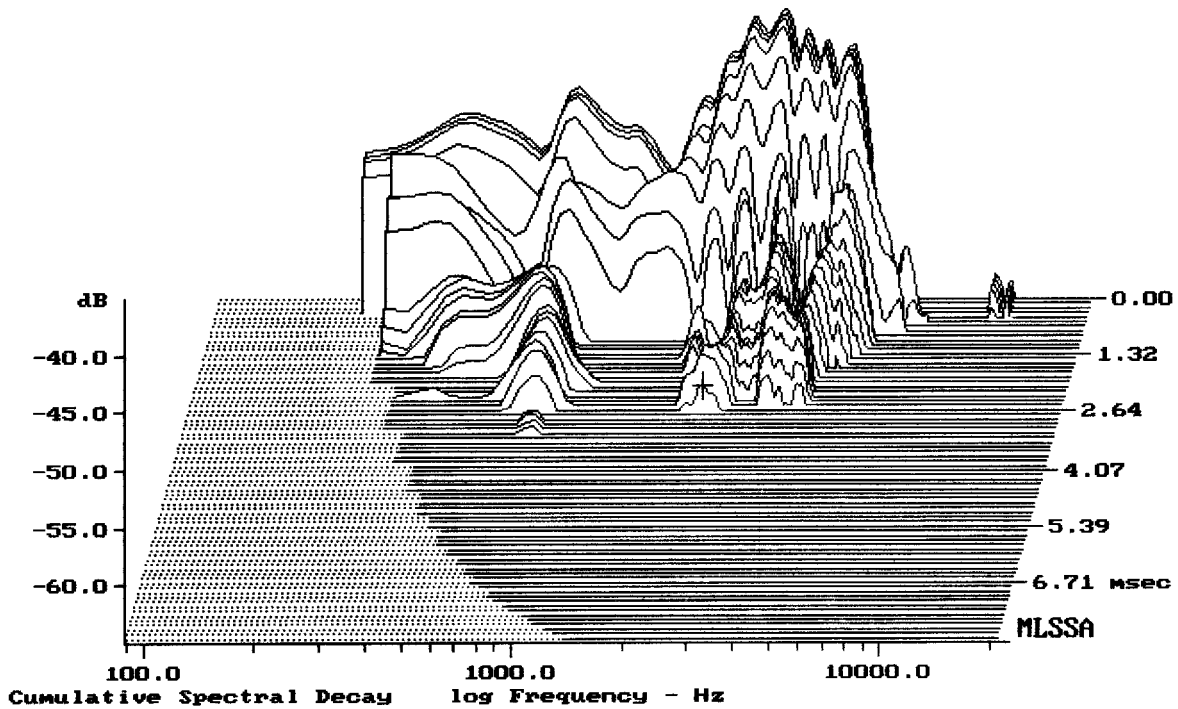

-62.88 dB, 2219 Hz (50), 2.640 msec (25)