

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	53.27	Hz
3	Re	5.69	Ohms[dc]
4	Res	67.53	Ohms
5	Qms	5.54	
6	Qes	0.47	
7	Qts	0.43	
8	L1	0.85	mH
9	L2	1.13	mH
10	R2	3.57	Ohms
11	RMSE-load	0.29	Ohms
12	Vas(Sd)	69.13	liters
13	Mms	51.12	grams
14	Cms	175	$\mu$ M/Newton
15	B1	14.44	Tesla-M
16	SPLref(Sd)	95.3	dB[Re]
17	Rub-index	0.00	


Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm

DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.8% (-20% to -50% is recommended).

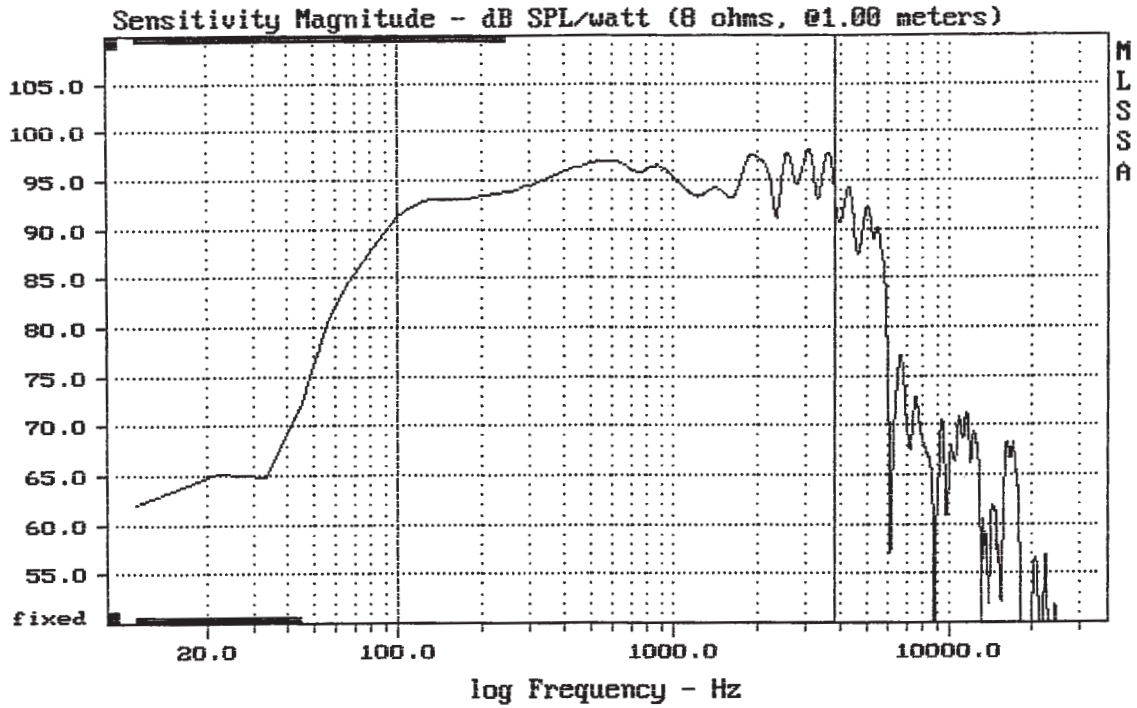


---


Level (100:3006 Hz) = 95.13 dB SPL/watt (8 ohms, @1.00 meters)

---

FANE N-LITE 12MB

4-10-81 3:30 PM

MLSSA: Frequency Domain

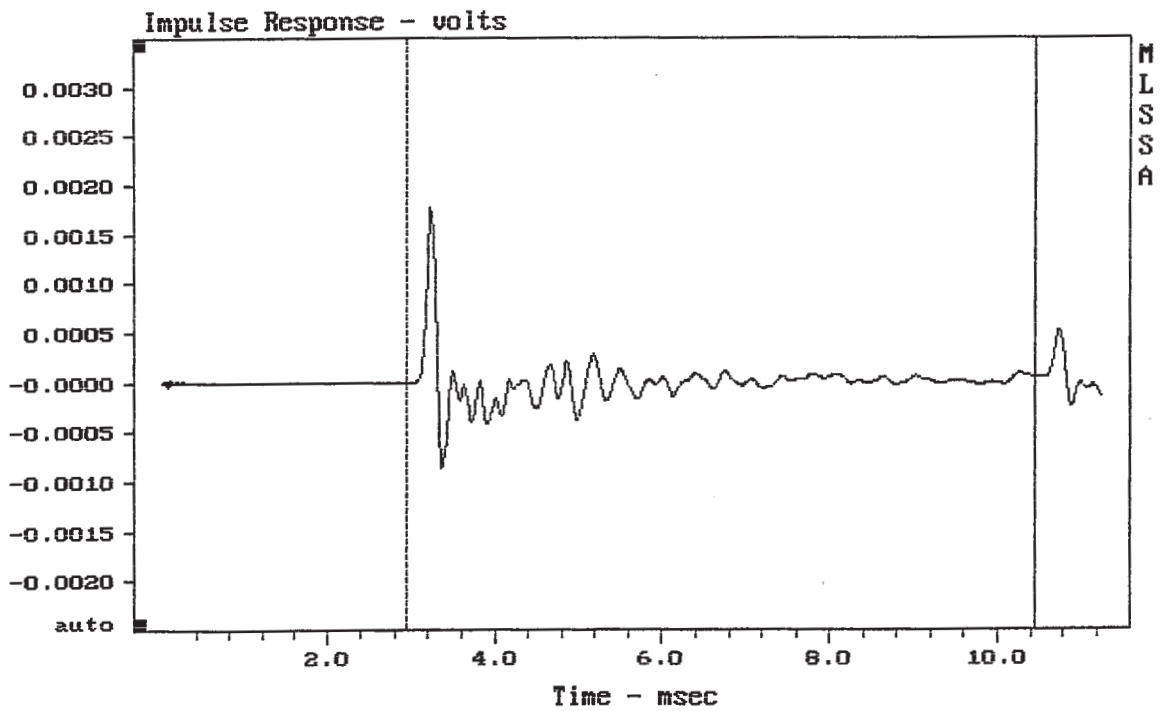


---

CURSOR: y = 5.76572e-005 x = 10.4500 (950)

---

FANE N-LITE 12MB