

| Line | Parameter   | Value | Units                       |
|------|-------------|-------|-----------------------------|
| 1    | RMSE-free   | 0.45  | Ohms                        |
| 2    | Fs          | 56.28 | Hz                          |
| 3    | Re          | 6.20  | Ohms [dc]                   |
| 4    | Res         | 95.07 | Ohms                        |
| 5    | Qms         | 5.51  |                             |
| 6    | Qes         | 0.36  |                             |
| 7    | Qts         | 0.34  |                             |
| 8    | L1          | 0.82  | mH                          |
| 9    | L2          | 1.57  | mH                          |
| 10   | R2          | 6.41  | Ohms                        |
| 11   | RMSE-load   | 0.87  | Ohms                        |
| 12   | Vas (Sd)    | 60.89 | liters                      |
| 13   | Mms         | 52.00 | grams                       |
| 14   | Cms         | 154   | $\mu\text{M}/\text{Newton}$ |
| 15   | B1          | 17.81 | Tesla-M                     |
| 16   | SPLref (Sd) | 96.6  | dB [Re]                     |
| 17   | Rub-index   | 0.01  |                             |

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.1% (-20% to -50% is recommended).


P.D.912

MLSSA: Parameters

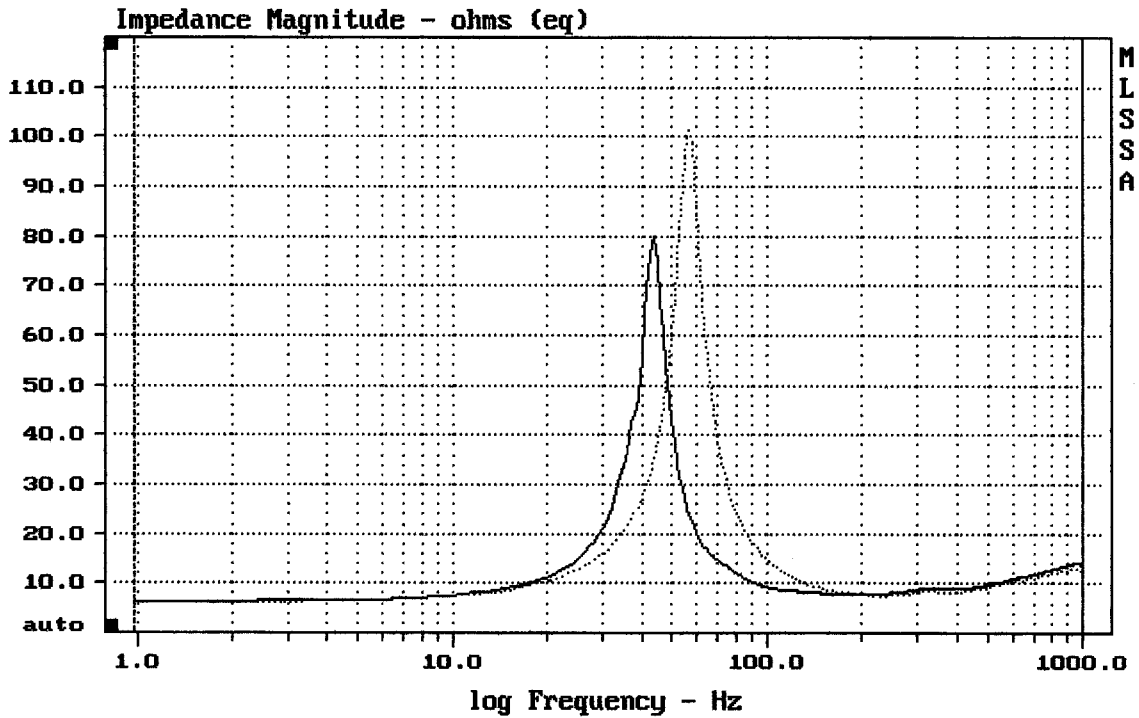

CURSOR: dy = -0.954556 x = 1000.9766 (1025)

MLSSA: Frequency Domain

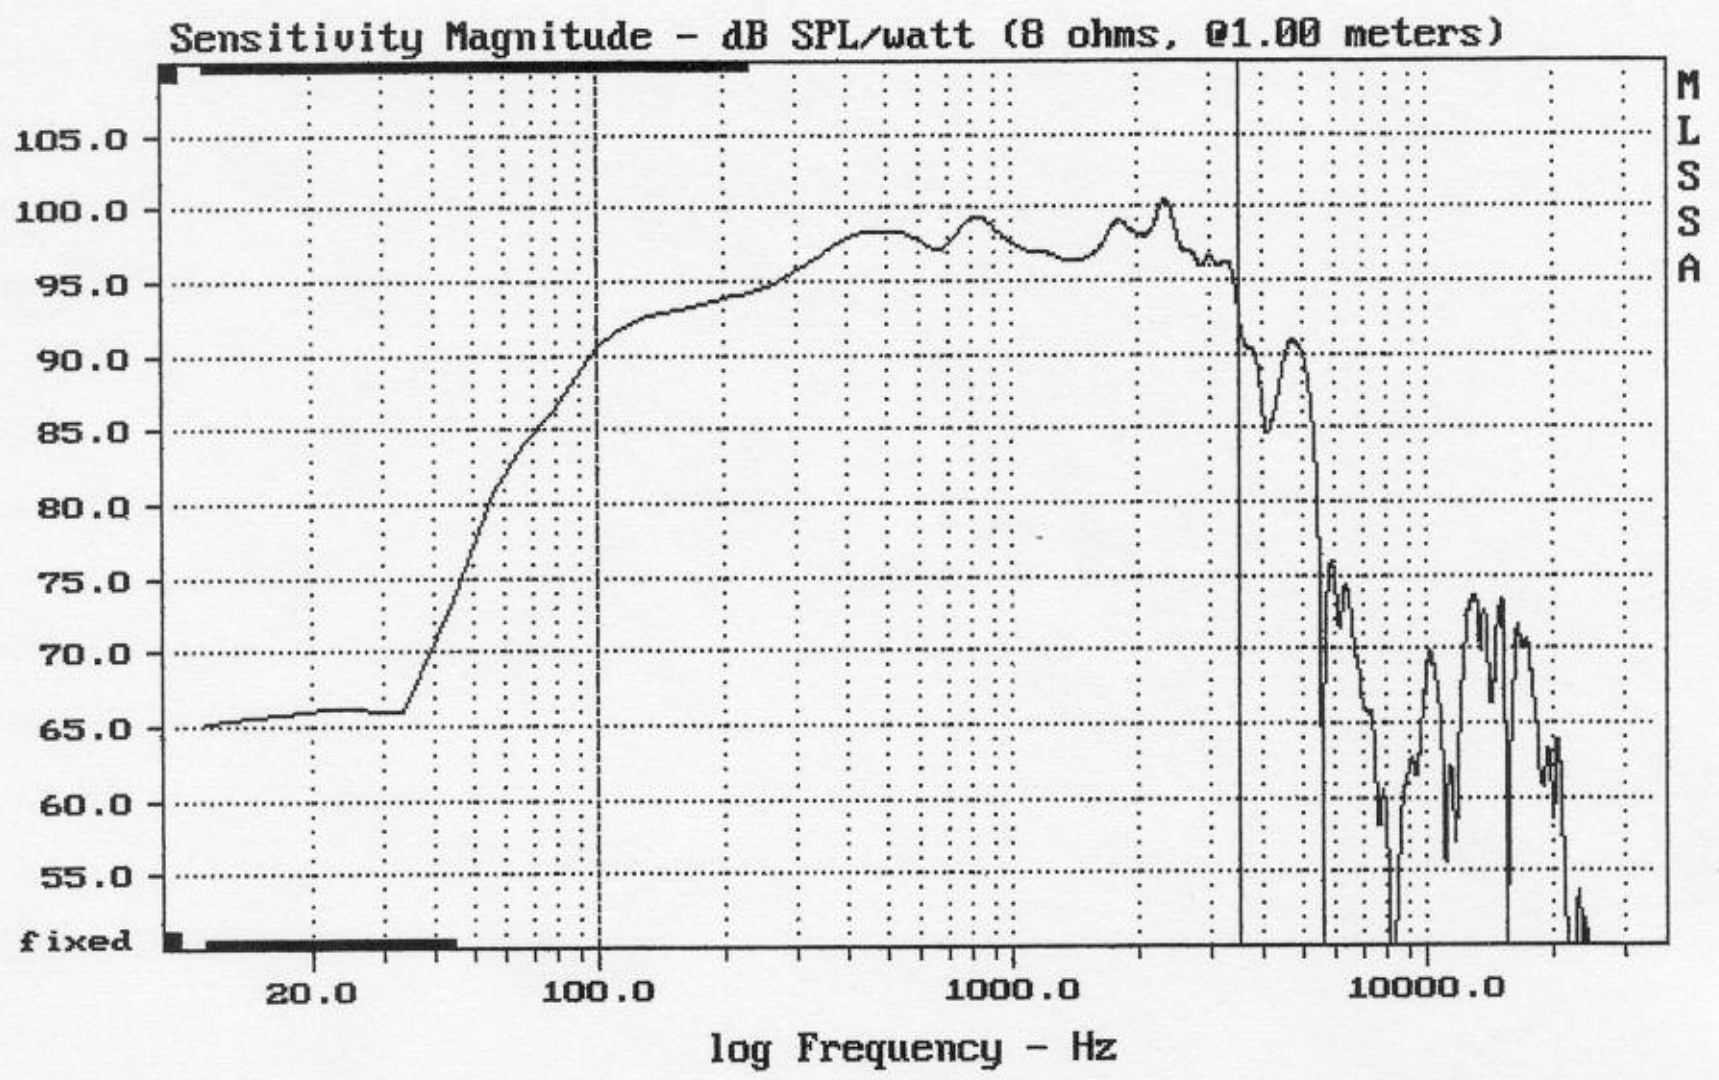


---

Level (100:3507 Hz) = 96.75 dB SPL/watt (8 ohms, @1.00 meters)

---

P.D.912