


Level (100:4361 Hz) = 97.22 dB SPL/watt (8 ohms, @1.50 meters)

14NDL76

MLSSA: Frequency Domain

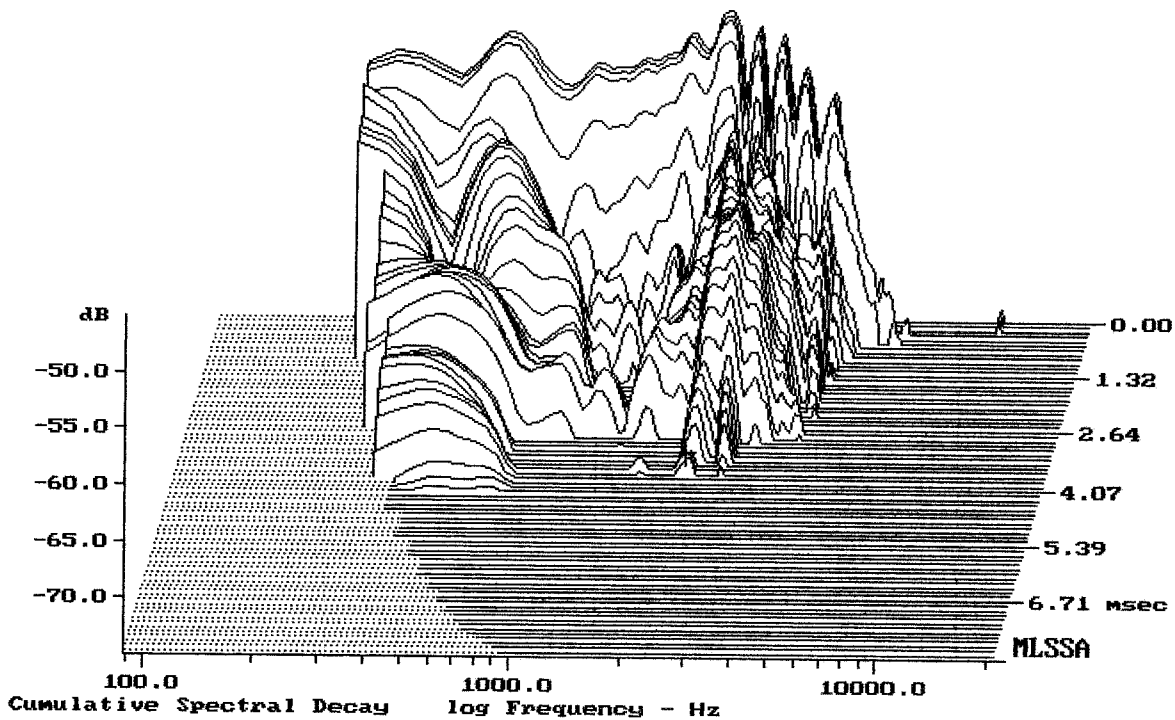

-73.46 dB, 2175 Hz (49), 3.630 msec (34)

DTTO

Line	Parameter	Value	Units	QC Limits
1	RMSE-free	0.38	Ohms	
2	Fs	49.78	Hz	
3	Re	5.22	Ohms[dc]	
4	Res	137.97	Ohms	
5	Qms	10.80		
6	Qes	0.41		
7	Qts	0.39		
8	L1	0.70	mH	
9	L2	1.19	mH	
10	R2	4.31	Ohms	
11	RMSE-load	0.25	Ohms	
12	Vas(Sd)	99.44	liters	
13	Mms	77.08	grams	
14	Cms	133	$\mu\text{M}/\text{Newton}$	
15	B1	17.55	Tesla-M	
16	SPLref(Sd)	96.6	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (80.00 grams)

Area (Sd): 730.62 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.6% (-20% to -50% is recommended).

14NDL76

MLSSA: Parameters

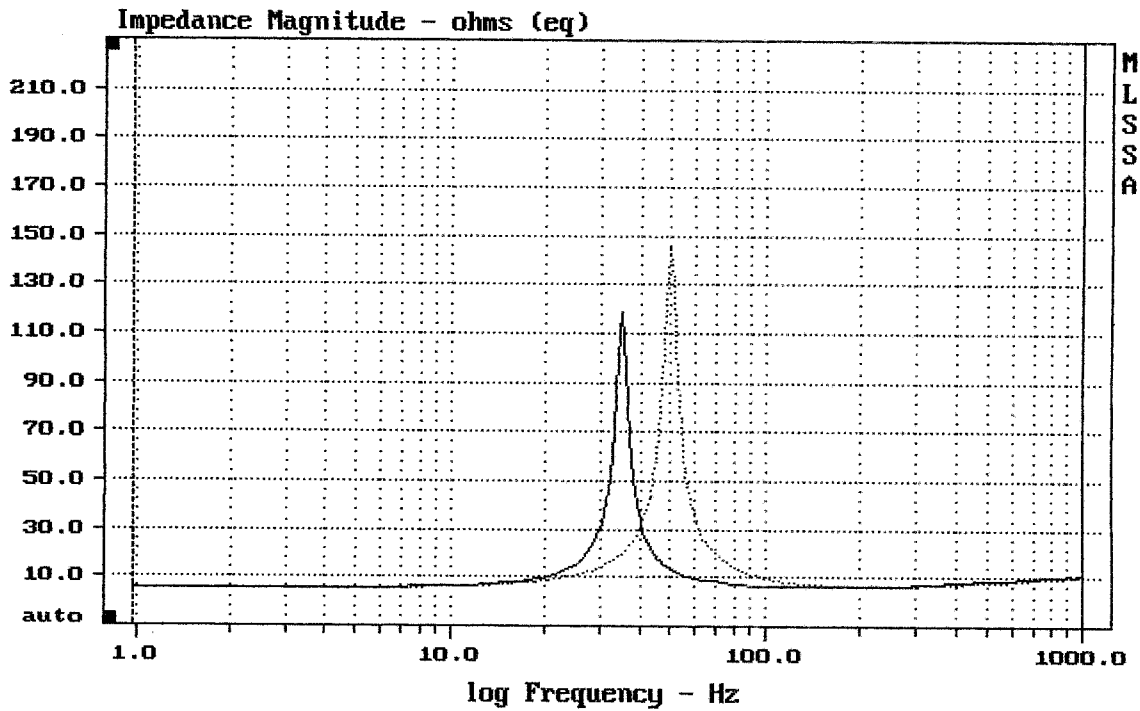

mean: 9.963, rms: 14.45, std: 10.46, max: 145.1, min: 5.323

MLSSA: Frequency Domain