


Level (100:3396 Hz) = 96.99 dB SPL/watt (4 ohms, @1.00 meters)

12CL64-4

MLSSA: Frequency Domain

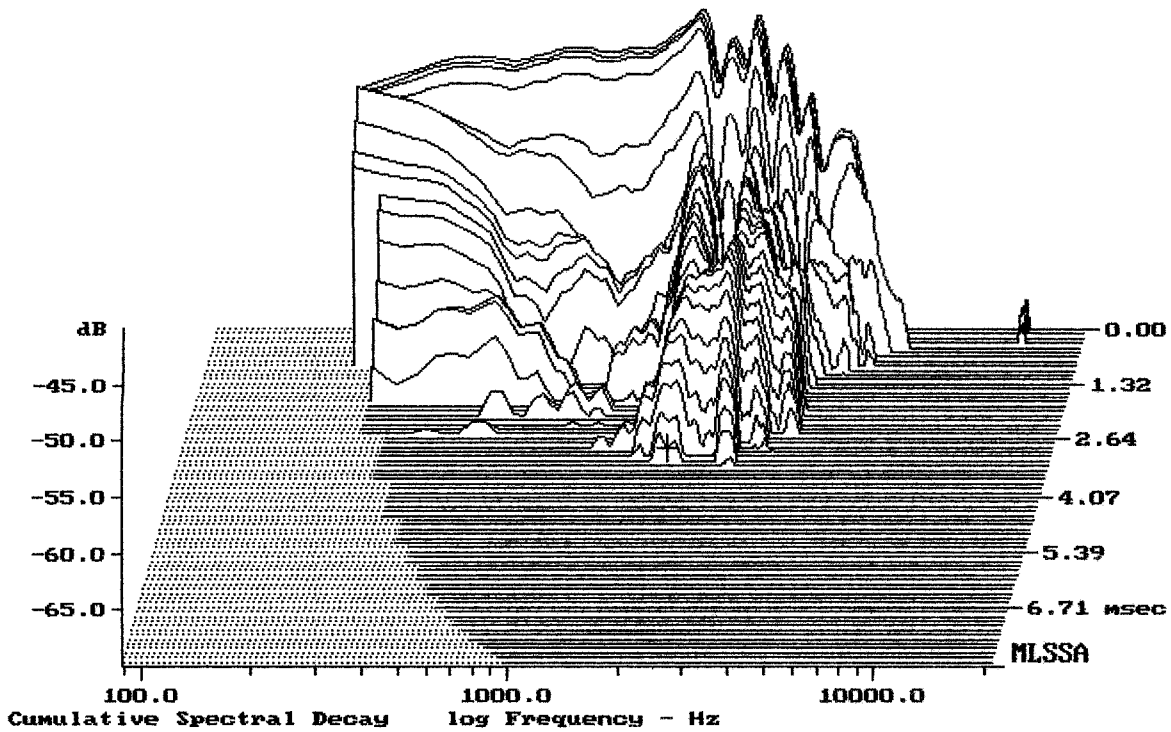

-68.82 dB, 1909 Hz (43), 3.190 msec (30)

DTTO

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.21	Ohms	
2	Fs	49.23	Hz	
3	Re	3.34	Ohms[dc]	
4	Res	95.91	Ohms	
5	Qms	8.44		
6	Qes	0.29		
7	Qts	0.28		
8	L1	0.56	mH	
9	L2	0.78	mH	
10	R2	2.45	Ohms	
11	RMSE-load	0.32	Ohms	
12	Vas(Sd)	94.53	liters	
13	Mms	43.77	grams	
14	Cms	239	$\mu\text{M}/\text{Newton}$	
15	B1	12.40	Tesla-M	
16	SPLref(Sd)	97.7	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

12CL64-4

MLSSA: Parameters

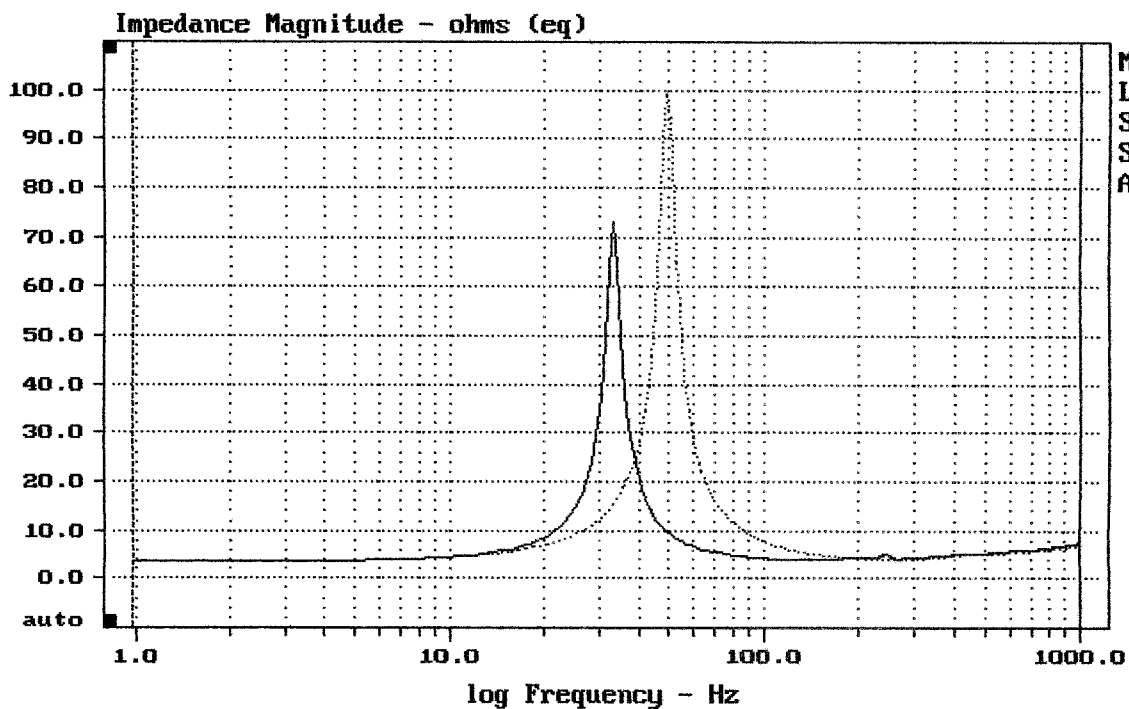

mean: 6.918, rms: 10.69, std: 8.148, max: 99.25, min: 3.524

MLSSA: Frequency Domain