


Level (100:2608 Hz) = 94.97 dB SPL/watt (8 ohms, @1.00 meters)

12PLB100

MLSSA: Frequency Domain

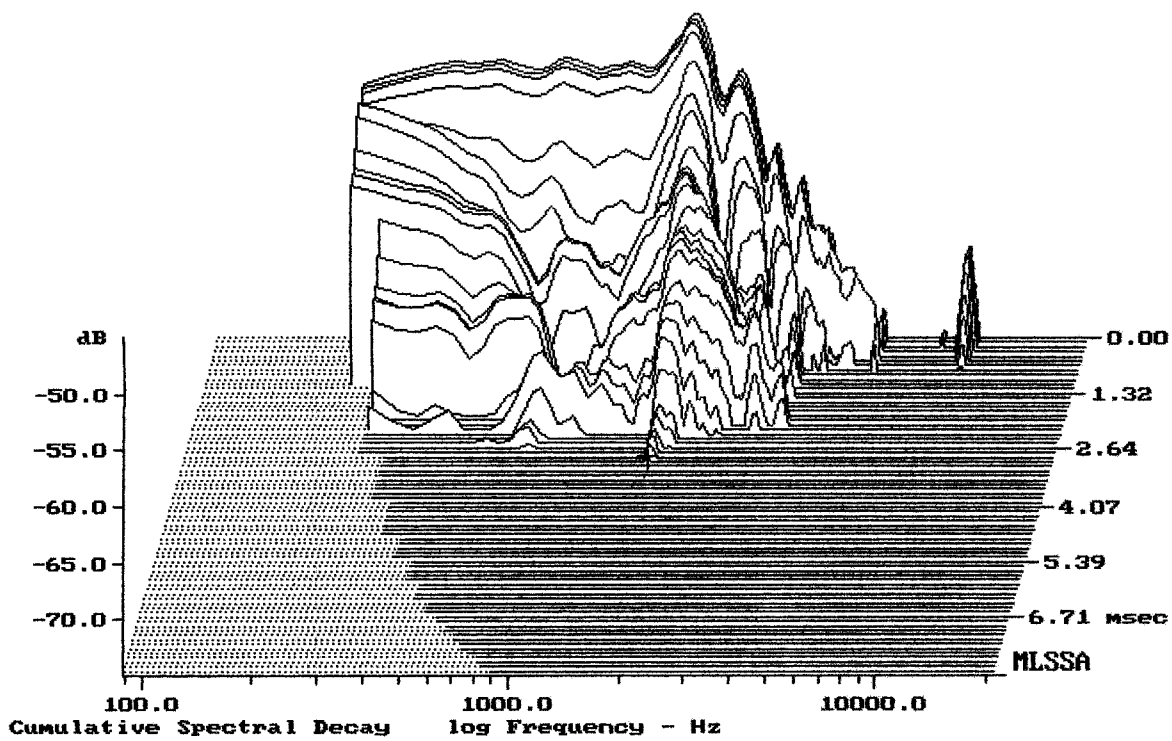

-74.53 dB, 1642 Hz (37), 2.970 msec (28)

DTTO

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.36	Ohms	
2	Fs	52.31	Hz	
3	Re	5.03	Ohms[dc]	
4	Res	100.22	Ohms	
5	Qms	7.20		
6	Qes	0.36		
7	Qts	0.34		
8	L1	1.13	mH	
9	L2	1.11	mH	
10	R2	4.23	Ohms	
11	RMSE-load	0.53	Ohms	
12	Vas(Sd)	53.45	liters	
13	Mms	68.56	grams	
14	Cms	135	$\mu\text{M}/\text{Newton}$	
15	B1	17.72	Tesla-M	
16	SPLref(Sd)	95.1	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.7% (-20% to -50% is recommended).

12PLB100

MLSSA: Parameters

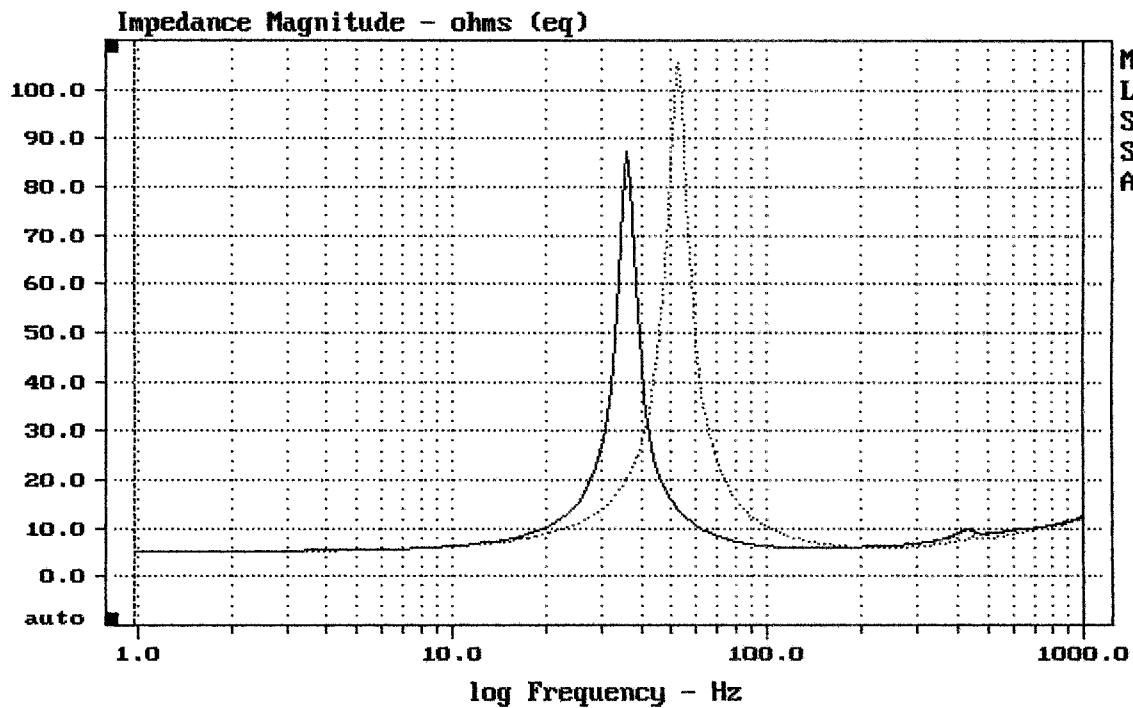

mean: 10.29, rms: 13.83, std: 9.231, max: 105.5, min: 5.167

MLSSA: Frequency Domain