


Level (100:2996 Hz) = 96.25 dB SPL/watt (4 ohms, @1.50 meters)

15CL76-4

MLSSA: Frequency Domain

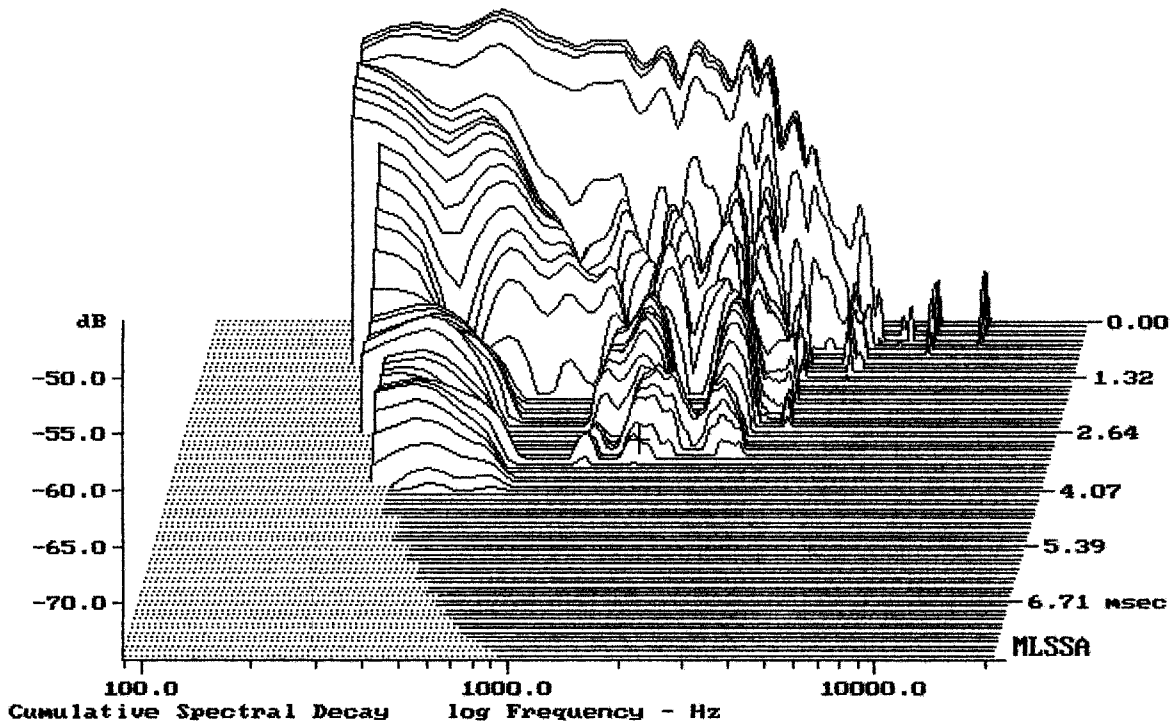

-73.30 dB, 1598 Hz (36), 3.300 msec (31)

DTTO

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.48	Ohms	
2	Fs	49.14	Hz	
3	Re	3.39	Ohms[dc]	
4	Res	40.29	Ohms	
5	Qms	4.18		
6	Qes	0.35		
7	Qts	0.32		
8	L1	0.64	mH	
9	L2	1.07	mH	
10	R2	4.95	Ohms	
11	RMSE-load	0.37	Ohms	
12	Vas(Sd)	123.16	liters	
13	Mms	87.52	grams	
14	Cms	120	$\mu\text{M}/\text{Newton}$	
15	B1	16.15	Tesla-M	
16	SPLref(Sd)	98.0	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.6% (-20% to -50% is recommended).

15CL76-4

MLSSA: Parameters

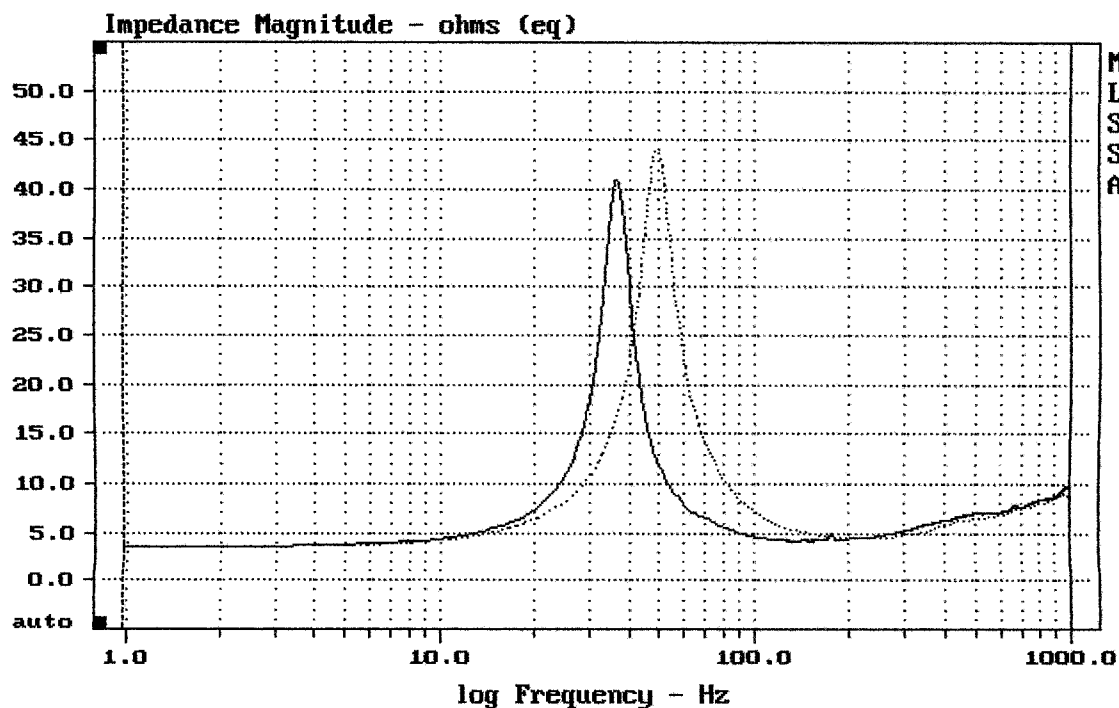

mean: 7.456, rms: 8.665, std: 4.413, max: 44.16, min: 3.543

MLSSA: Frequency Domain