


Level (100:2308 Hz) = 96.81 dB SPL/watt (8 ohms, @1.50 meters)

18RBX100

MLSSA: Frequency Domain

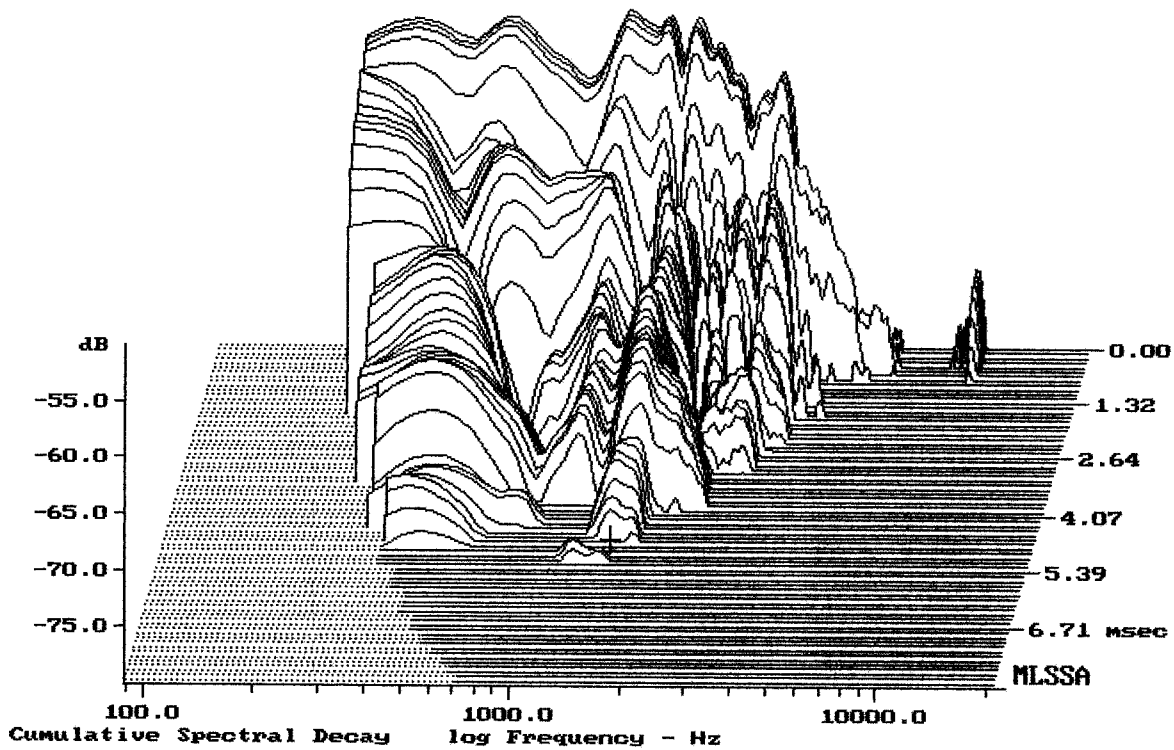

-79.73 dB, 1465 Hz (33), 4.730 msec (44)

DTTO

Measured Data			QC Limits
Line	Parameter	Value	Units
1	RMSE-free	0.40	Ohms
2	Fs	46.55	Hz
3	Re	4.97	Ohms[dc]
4	Res	75.37	Ohms
5	Qms	7.15	
6	Qes	0.47	
7	Qts	0.44	
8	L1	1.13	mH
9	L2	1.62	mH
10	R2	4.48	Ohms
11	RMSE-load	0.46	Ohms
12	Vas(Sd)	152.43	liters
13	Mms	161.74	grams
14	Cms	72	μ M/Newton
15	B1	22.33	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.3% (-20% to -50% is recommended).

18RBX100

MLSSA: Parameters

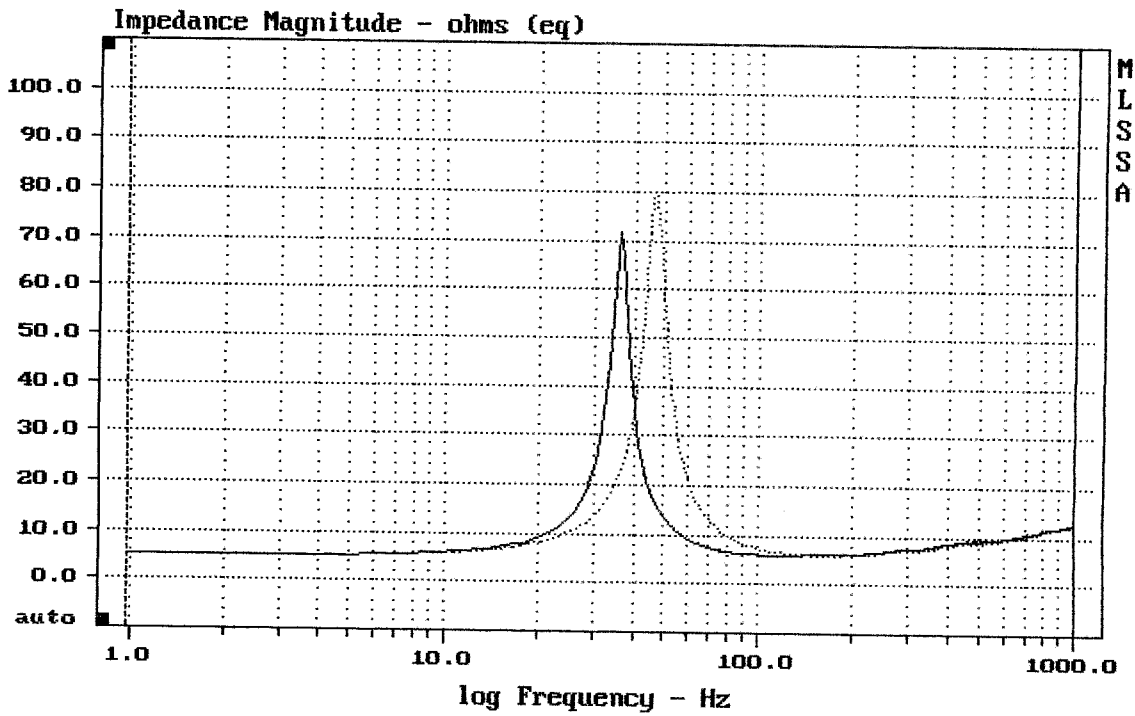

mean: 10.11, rms: 12.01, std: 6.469, max: 79.34, min: 5.07

MLSSA: Frequency Domain