


Level (100:3007 Hz) = 98.83 dB SPL/watt (8 ohms, @1.00 meters)

12NDL76 2016

MLSSA: Frequency Domain

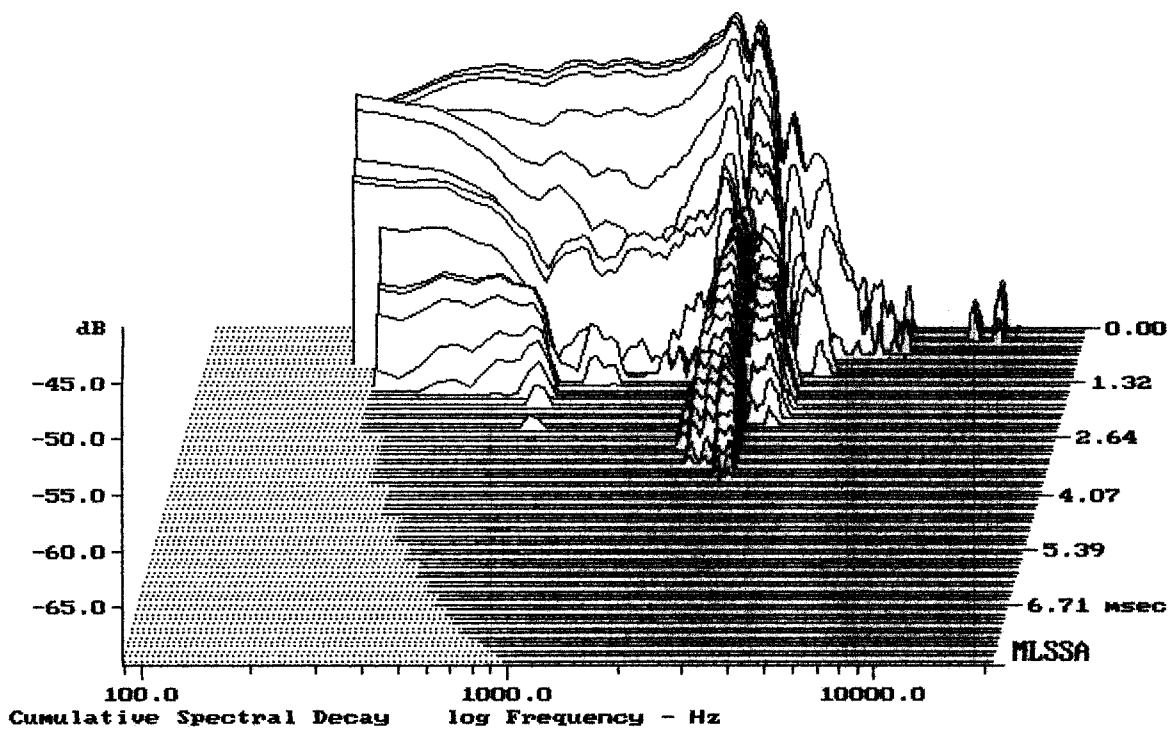

-69.68 dB, 2708 Hz (61), 3.520 msec (33)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.50	Ohms
2	Fs	60.21	Hz
3	Re	4.47	Ohms[dc]
4	Res	77.99	Ohms
5	Qms	5.27	
6	Qes	0.30	
7	Qts	0.29	
8	L1	0.66	mH
9	L2	1.13	mH
10	R2	3.61	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	56.91	liters
13	Mms	48.60	grams
14	Cms	144	$\mu\text{M}/\text{Newton}$
15	B1	16.50	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.3% (-20% to -50% is recommended).

12NDL76 2016

MLSSA: Parameters

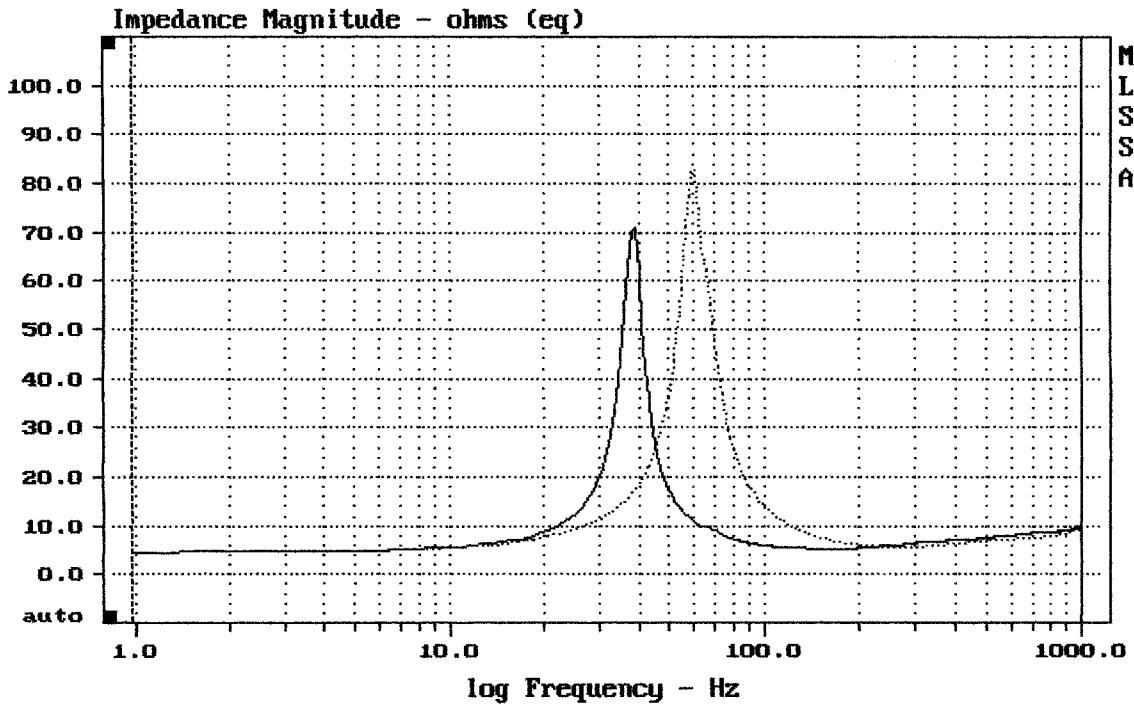

mean: 9.196, rms: 12.73, std: 8.886, max: 83.11, min: 4.592

MLSSA: Frequency Domain