



6MD38

LF Drivers - 6.5 Inches

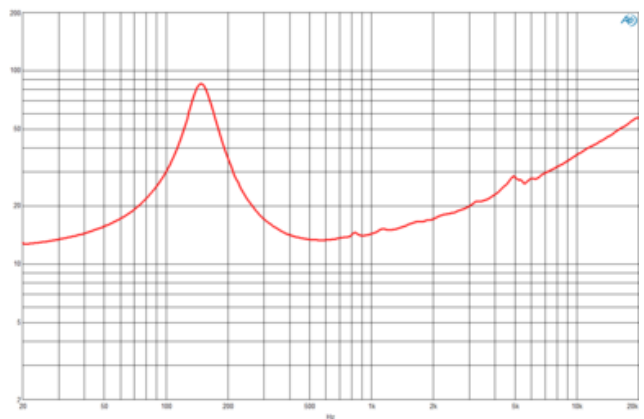

- 240 W continuous program power capacity
- 38 mm (1.5 in) aluminium voice coil
- 150 - 6000 Hz response
- 95 dB sensitivity

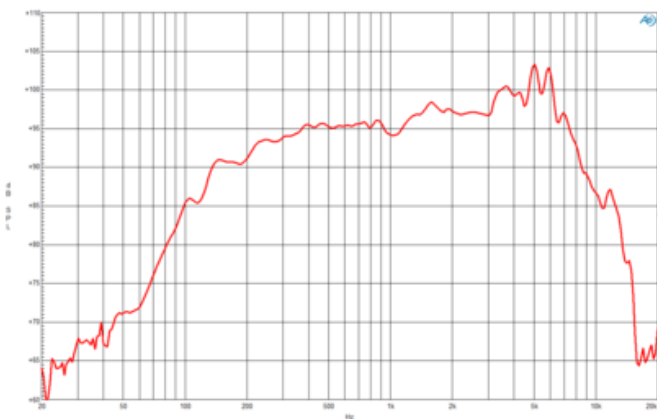

6MD38

LF Drivers- 6.5 Inches

SPECIFICATIONS

Nominal diameter	170 mm (6.5 in)
Nominal impedance	16 Ω
Minimum impedance	13.3 Ω
Nominal power handling ¹	120 W
Continuous power handling ²	240 W
Sensitivity (1W/1m) ³	95.0 dB
Frequency range	150 - 6000 Hz
Voice coil diameter	38 mm (1.5 in)
Winding material	Aluminium
Former material	Glass Fibre
Winding depth	9 mm (0.35 in)
Magnetic gap depth	6 mm (0.25 in)
Flux density	1.4 T

MOUNTING AND SHIPPING INFO

Overall diameter	187 mm (7.4 in)
Bolt circle diameter	172 mm (6.7 in)
Baffle cutout diameter	145.0 mm (5.7 in)
Depth	82 mm (3.2 in)
Flange and gasket thickness	9 mm (0.35 in)
Air volume occupied by driver	0.8 dm ³ (0.03 ft ³)
Net weight	2.2 kg (4.8 lb)
Shipping units	1
Shipping weight	2.45 kg (5.4 lb)
Shipping box	221x214x130 mm (8.7x8.4x5.1 in)

DESIGN

Surround shape	Triple Roll
Cone shape	Exponential
Magnet material	Ferrite
Spider	Single
Pole design	T-Pole
Woofer cone treatment	WP Waterproof Front Side

SERVICE KIT

RCK06MD3816

PARAMETERS

F _s	150 Hz
R _e	11.7 Ω
Q _{es}	0.61
Q _{ms}	2.8
Q _{ts}	0.5
V _{as}	2.3 dm ³ (0.08 ft ³)
S _d	132.0 cm ² (20.5 in ²)
η_0	1.4 %
X _{max}	3.5 mm
X _{var}	2.0 mm
M _{ms}	11 g
Bl	14.5 Txm
L _e	0.4 mH
EBP	245 Hz

1. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range F_s-10F_s. Power calculated on rated minimum impedance. Loudspeaker in free air.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 4V for 16 ohm Nominal Impedance

B&C Speakers s.p.a.

Via Poggioromo, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY
Tel. +39 055 65721 - Fax +39 055 6572312
mail@bcspeakers.com