


Level (100:3207 Hz) = 97.95 dB SPL/watt (8 ohms, @1.50 meters)

14NDL88

MLSSA: Frequency Domain

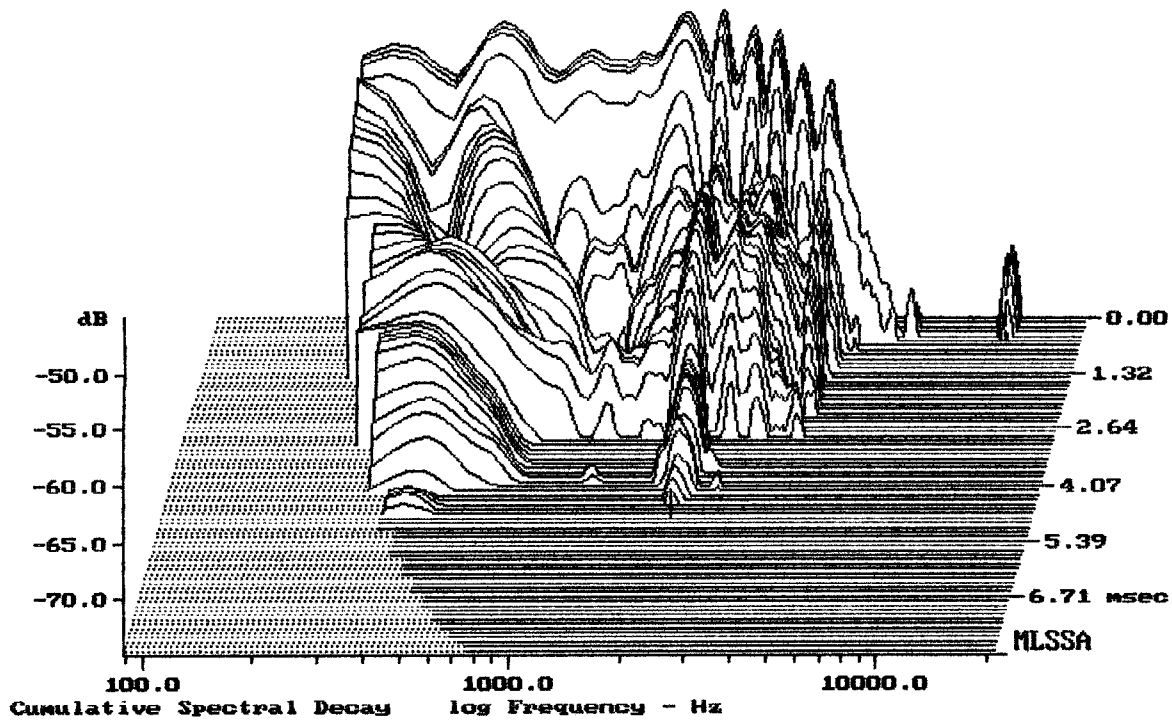

-74.70 dB, 2131 Hz (48), 4.620 msec (43)

DTTO

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.64	Ohms
2	Fs	50.60	Hz
3	Re	5.02	Ohms[dc]
4	Res	168.79	Ohms
5	Qms	12.02	
6	Qes	0.36	
7	Qts	0.35	
8	L1	0.65	mH
9	L2	1.06	mH
10	R2	4.80	Ohms
11	RMSE-load	0.53	Ohms
12	Vas(Sd)	88.82	liters
13	Mms	78.16	grams
14	Cms	127	μ M/Newton
15	B1	18.68	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 706.86 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.8% (-20% to -50% is recommended).

14NDL88

MLSSA: Parameters

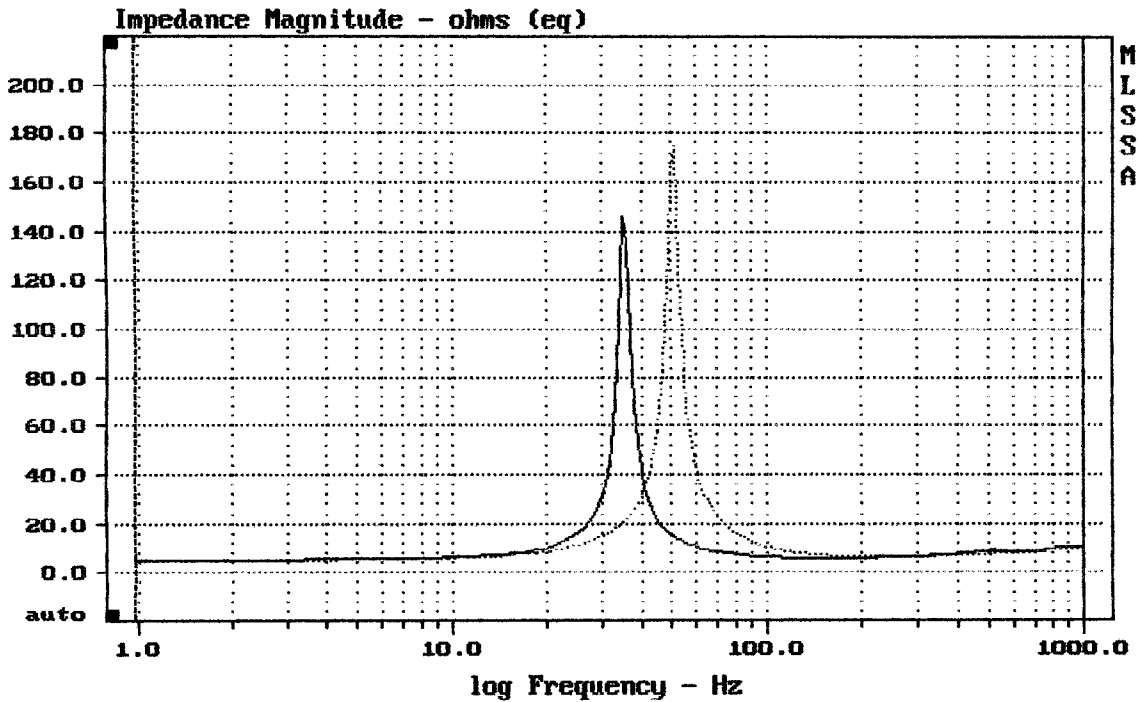

mean: 10.05, rms: 15.99, std: 12.43, max: 174.5, min: 5.095

MLSSA: Frequency Domain