

EXALITE

EXL-S Profile WW+CW 20W

USER MANUAL



CE RoHS

OVERVIEW

Thank you for using our product, this unit is designed for indoor using, it's widely used for commercials, museums, restaurant, churches, educational theatres, etc. as high power led effects lighting, this unit can be operated as a single unit or multiple units for large applications. Due to the small size, we make a new lighting system of wireless control by the controller instead of the DMX signal. It is available in four field angles: 19°, 26°, 36° and 50°.

Technical Parameter:

- Led power: 20W
- Light Color: Warm white + Cool white
- IC Chip: Nichia
- LED Lamp: Japan Citizen
- Color Rendering Index(CRI): Ra≥90
- LED Life Time: over 50,000 hours
- Voltage: AC100V-240V 50-60Hz
- Max.power consumption: 26W
- Fixed Lens: 19°, 26°, 36° and 50°(optional)
- Dimmer: 0~100% linearly adjustable
- Strobe: 1-25times/sec
- Focus: Can be adjusted by hand
- Light body: Die-casting Aluminum
- Body color: Black / White
- Control Protocol: DMX
- Control System: DMX512,Sound mode
- DMX Channels:2/5CH (2in1)
- Feature of housing: Small volume, lightweight
- Environment Temperature: 0°C~40°C
- IP Grade: IP20
- Net Weight: 2.5kg
- Packing size: 24.5x10x20cm

1. Product Introduction

1.1. Current regulation

The current need to be adjusted by software before Ex-work. (Please check the menu description of "current adjust".)

1.2. Screen protection

Without operate key in 30 seconds , it enter black screen (can be set)
Press any keys then it can quit screen protection status

1.3. Reminder from Signal

In the Slave State, the screen will flicker if no receive the signal from controller or master light. Attention: When the screen flicker (it means the cable connect is wrong), it won't be the screen protection mode even it is time to enter screen protection mode. If it already the screen mode, it will automatically log out. The reason that no screen protection in flicker is to help to user judge if there has cable connection problem or not.

1.4. Delay of controller

When push up or pull down the pushrod of the controller, the light will not turn bright or dark at once, but change smoothly. (1 second) This function can be turn on or turn off.
Special situation: pull down to "0", the light will turn off right away without delay.

1.5. Multi-light working in the same time

When using controller to control several lights, and using strobe, the controller just send the channel data. The strobe would be showed by itself. And should be attention for the follow situation:


1. There will be many situation make the light become not synchronization in the beginning. (For example: the different time of opening the light will make them connect the controller in different time) . And you can change the controller table puller data(from 20 to 0, and back to 20), then it can be synchronization.

2. Using the controller to make program make the strobe effect to be synchronization,the screen will be shake to judge whether it become synchronization or not. The shake will not have any effect for the function.

3. We have tested for several times, and it still get synchronization in the end. But there are a lot of factor to effect the synchronization, some software can not be controlled, such as hardware factor and the environment factor. If you still can not realize synchronization after using this software, you can use the other way such as controller programming.

2.Operation

2.1. Key operation

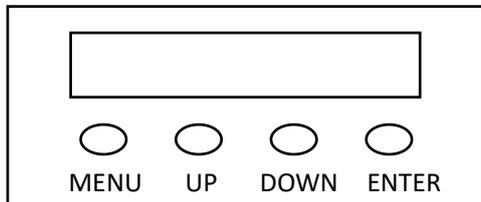

➤ Main key

- 【MENU】 Main menu or back the last menu
- 【UP】 Choosing data value
- 【DOWN】 Choosing data value
- 【ENTER】 Enter, choose the vice menu or end edit.

➤ Combination key

Combination by 2 or more key. Such as “UP+DOWN” Press UP and DOWN at the same time. Combination key of “UP+DOWN” is different from “UP” or “DOWN”, it have its own function.

➤ Long press

Press the button for long time then leave.

2.2. Menu description

2.2.1. Main menu

Press MENU key to change the menu

LED show	English word/function	key operation	description
A001	Advanced DMX	UP/DOWN key to choose the address code (1~512) ENTER key to save	check "channel data"
	Advance DMX controller state		
d001	dMX		
	normal DMX controller state		
SLAV	SLAVe		
	equal "d001"		
<p>Above is the slave mode, attention:</p> <p>1、 Make sure there is only a signal (controller or master light)</p> <p>2、 The light will be turn off if the signal is cut down. (turn off the controller or master light)</p>			
CF01	Color Fade	UP/DOWN key to choose the speed (1~50)	
	gradual change		
CJ01	Color Jump	ENTER to save.	
	Jump change		
CP01	Color Pulse		
	Pulse change		
SEAR	Static	(0~255)ENTER to choose the led group UP/DOWN to choose the bright of the led group	
	Change color		
SE01	Strobe	UP/DOWN key to choose the speed (1~50) ENTER to save.	
	Strobe		
Soud	Sound		
	Sound model		
<p>Above is the master state, the light will send the data automatically. (the slave light should set "d001" or "SLAV")</p>			

2.2.2. Current adjustment

2.2.2.1. Keyboard current adjustment

Under any main menu item, press and hold the MENU, after about 3 seconds to enter the "keyboard current adjustment" mode, Then can adjust the current . Proceed as follows:

- 1、 First see the "r030". "R" stands for red, so only red will be lit at this time, and the other colors will turn off automatically. "030" represents the current current value, use the UP button or DOWN button to adjust from 0 to 255. **Note that the slow increase, suitable for this: If the current is too large, will lead to lamp beads burned!**
- 2、 After adjusting the red, press the "MENU" key to switch to "G030" began to adjust the green, the same time it will only light green while the other colors will automatically shut down The adjustment of other colors and the like.
- 3、 Press "ENTER" key to save and automatically return to "A001" menu

2.2.2.2. DMX Current regulation

Through the console (or host) for multiple lights current regulation. The console for example, the following steps:

- 1、 **For reduce the risk of burning lamp. before the completion of step 3, please do not connect the light to the console.**
- 2、 First of all through the "keyboard current adjustment" to adjust the ideal current value in a light and record it.
- 3、 Set the channels 1, 2, and 3 of the console to recorded the current values (to represent red, green, and blue, for example,then set the channel 2 value to 100 for a green current value of 100). **This step must be completed before starting step 4! Otherwise it may be caused by channel value is too large led lamp burning!**
- 4、 After confirming that step 3 is no problem,then connect the light to the console. Press and hold the MENU key and ENTER key at the same time in any main menu. After about 3 seconds, enter "DMX current adjustment" mode. The screen will display "CSdA"(Color Scale dMX Adjustment),and which will flicker if the DMX signal is not received
- 5、 Wait for about 1 second, if "CSdA" is not flicker then it has correctly received the current value passed by the console (also can through lamp brightness to be observed), the adjustment is successful.
- 4、 Press "ENTER" key to save and automatically return to "A001" menu
- 6、 In step 5, the channel value of the console can also be changed to adjust again. Since it is the ideal value that has already been adjusted, generally do not need to adjust again. **If you want to adjust, you must be conscious, careful! If the current is too large, will lead to lamp burned!**

2.2.3. Set Menu

In the “dEMo” menu, long press “ENTER” to set the menu.

Press MENU to change the menu option.

LED show	English Word/function	key operation	Description
	LED waiting time	UP/DOWN choose the waiting time	0 = no screen protect
	Screen protect time		
	High Power	UP/DOWN choose high power or not	On = 100% off = 33.3%
	Power choose		
	dMX-controller delay	UP/DOWN choose use the controller delay or not	
	controller delay		
	Synchronization	UP/DOWN choose use multi-light synchronization or not	
	Multi-light synchronization		
	LoAd	Long press ENTER until it shows “LdEd”(loaded)	
	reset		
	rEturN	Press ENTER to save the data and back to main menu.	
	Back to function menu		

2.3. Control

2.3.1. Channel

0001

Channel	Data	Function
1	0~255	Dimmer and software cutting: When dimmer data is 0, the program will still run but no light. The difference with "BLACKOUT" key(controller keys) &"Software cutting": only work this light , and do not clear up the controller data .
2	0~255	Color 1
3	0~255	Color 2
4	0~5	No function
	6~255	Strobe: 6 is slowest, 255 is fastest
5	0~25	Turn on "delay by controller"
	26~100	Turn off "delay by controller"
	101~150	Pulse change: channel 4 for control the speed
	151~200	Jump change: channel 4 for control the speed
	201~250	Gradual change: channel 4 for control the speed
	251~255	Sound mode: the changing of the light depends on the MIC of each light

1001

Channel	Data	Function
1	0~255	Color 1
2	0~255	Color 2

SAFETY WARNING

1. Warning

- * Every person involved with the installation , operation and maintenance of this device has to be qualified .
- * User must follow the instructions of this manual
- * Unqualified person can not open the housing cover and operate the device , or the dealer will not accept liability for any resulting defects or problems.
- * The device against rain and moisture

2. Waring notes :

- * Power supply : AC 100V-240V , 50/60Hz
- * Make sure the power switch is off , the power plug , outlet and the earth connection is in well condition before connecting the device with the mains.
- * Please use qualified power plug and the outlet. Never connect the power cord of this device with other electrical equipment.
- * During move and installation , make sure the device not crashed with metal parts and other tough materials.
- * Always disconnect from the mains, when the device is on the installation and dismantled
- * The minimum distance between light-output and the illuminated surface must be more than 50cm
- * The device must only be installed on a non-flammable surface . In order to safeguard sufficient ventilation , leave 50cm of free space around the device . Please note that heat-sensitive objects may be deformed or damaged by the emitted heat .
- * During the operation the housing becomes very hot ! Do not operate the device for 15 minutes after switching off .
- * The maximum ambient temperature $T_a = 45^{\circ}\text{C}$ must never be exceeded , The maximum housing temperature $T_b = 80^{\circ}\text{C}$ must never be exceeded .
- * For indoor use
- * Replace any visible cracked protective shield , filters and lens .
- * The protective shiel, filters and lens will require weekly cleaning as smoke "Cfluid tends to building up residues , reducing the light "Coutput very quickly.

DISCLAIMER

1. The device is with one year warranty . The warranty period appear non-artificial quality problem, this company is responsible for free maintenance
2. User violate operation caused the machine failure, this is user responsibility.
3. If due to the wrong operation or intense impact caused product destroy even safety accidents, the manufacturer does not undertake any responsibility
4. Prohibit replaced product components by any person, therefore caused any consequences will be whose responsible

Please contact us freely when you need our related products or in formations...



PRODANCE, s.r.o.
Osadní 799/26, 170 00 Praha 7
T: 220 806 054 E: info@prodance.cz
www.prodance.cz