


Level (100:4705 Hz) = 98.78 dB SPL/watt (16 ohms, @1.50 meters)

DELTA 15B 160HM

MLSSA: Frequency Domain

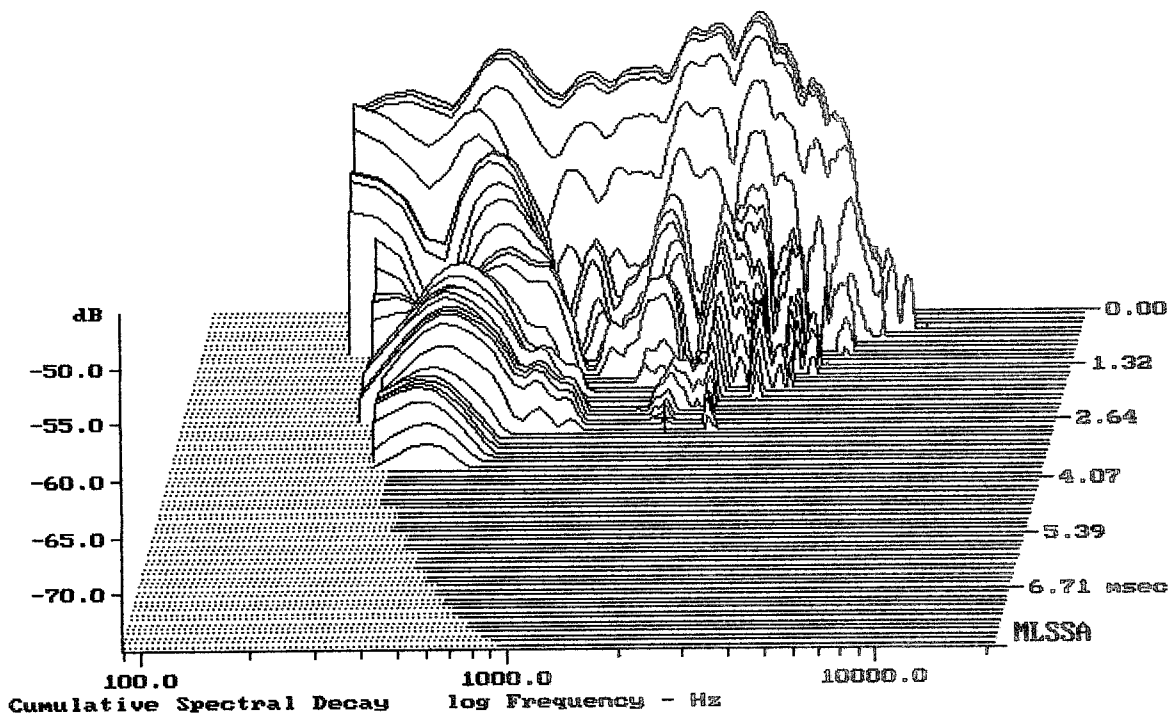

-74.50 dB, 1820 Hz (41), 2.750 msec (26)

DT10

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	43.73	Hz
3	Re	11.61	Ohms[dc]
4	Res	142.88	Ohms
5	Qms	8.03	
6	Qes	0.65	
7	Qts	0.60	
8	L1	1.12	mH
9	L2	1.91	mH
10	R2	9.04	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	186.43	liters
13	Mms	72.99	grams
14	Cms	181	μ M/Newton
15	B1	18.89	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.8% (-20% to -50% is recommended).

EMINENCE DELTA 15B 16OHM

MLSSA: Parameters

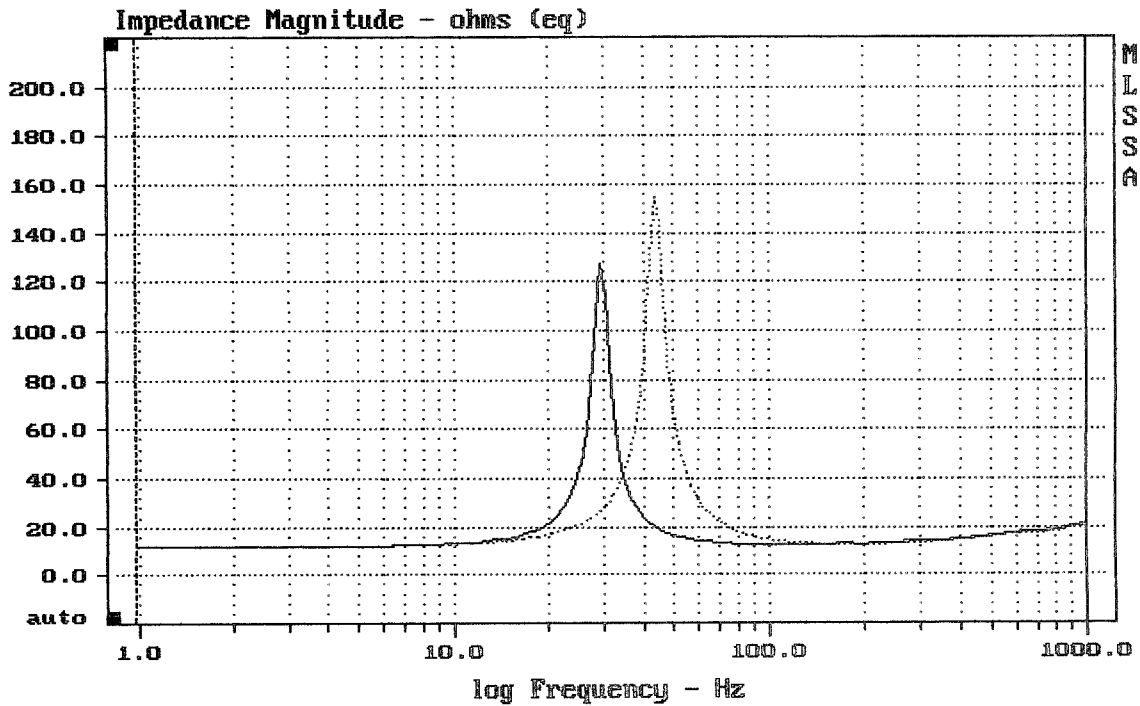

mean: 18.13, rms: 21.39, std: 11.35, max: 154.9, min: 11.69

MLSSA: Frequency Domain