


Level (100:4006 Hz) = 99.28 dB SPL/watt (16 ohms, @1.50 meters)

KAPPA PRO 15B 160HM

MLSSA: Frequency Domain

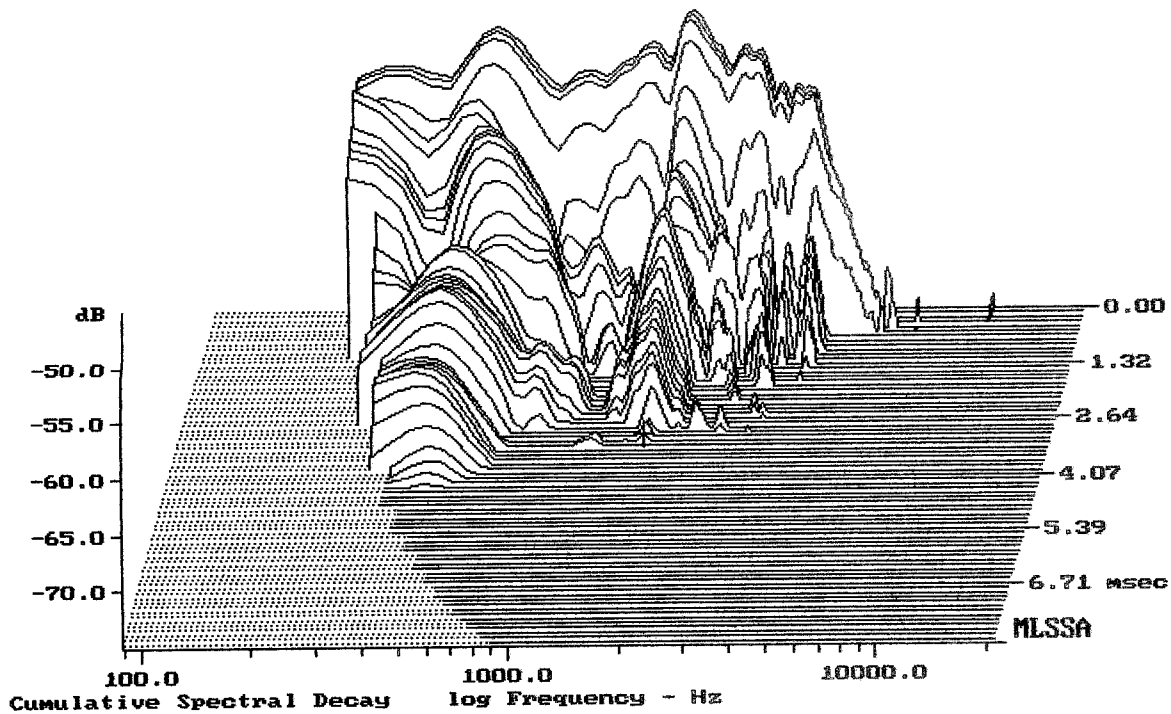

-74.29 dB, 1642 Hz (37), 3.190 msec (30)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.81	Ohms
2	Fs	44.23	Hz
3	Re	10.29	Ohms[dc]
4	Res	248.59	Ohms
5	Qms	9.69	
6	Qes	0.40	
7	Qts	0.39	
8	L1	1.52	mH
9	L2	2.27	mH
10	R2	9.43	Ohms
11	RMSE-load	0.69	Ohms
12	Vas(Sd)	169.75	liters
13	Mms	78.36	grams
14	Cms	165	$\mu\text{M}/\text{Newton}$
15	B1	23.64	Tesla-M
16	SPLref(Sd)	97.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

EMINENCE KAPPA PRO 15B 16OHM

MLSSA: Parameters

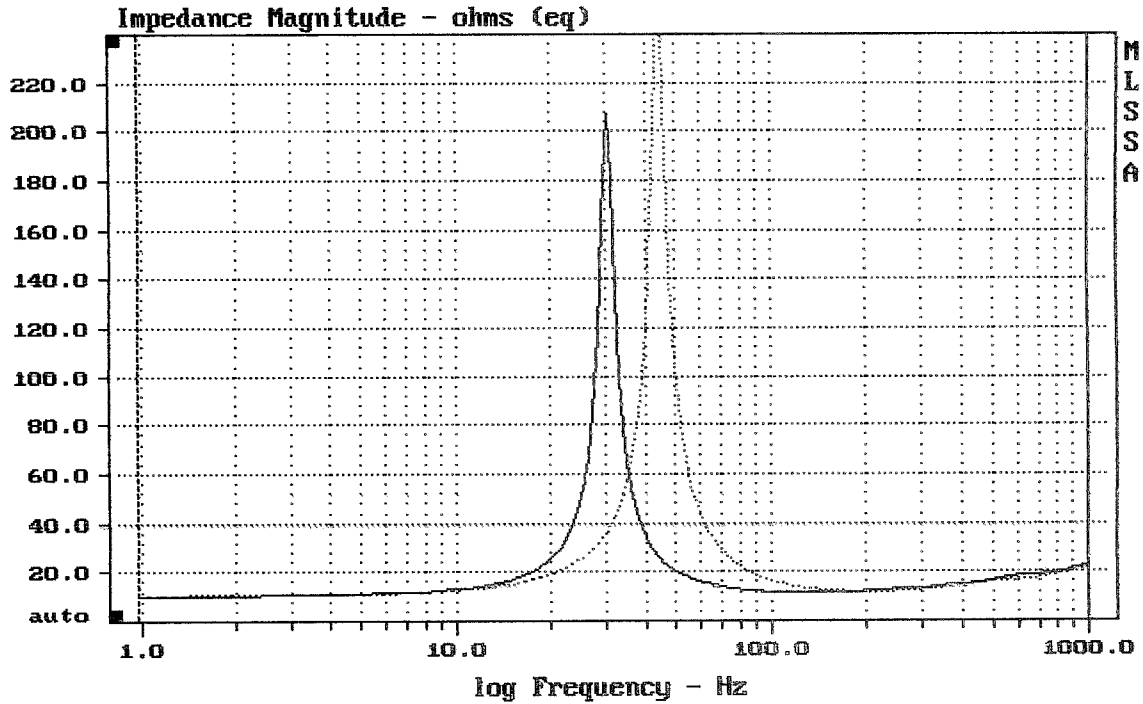

mean: 19.37, rms: 26.92, std: 18.69, max: 257.9, min: 10.3

MLSSA: Frequency Domain