


Level (100:2208 Hz) = 92.77 dB SPL/watt (8 ohms, @1.00 meters)

KRIX KX-8700

MLSSA: Frequency Domain

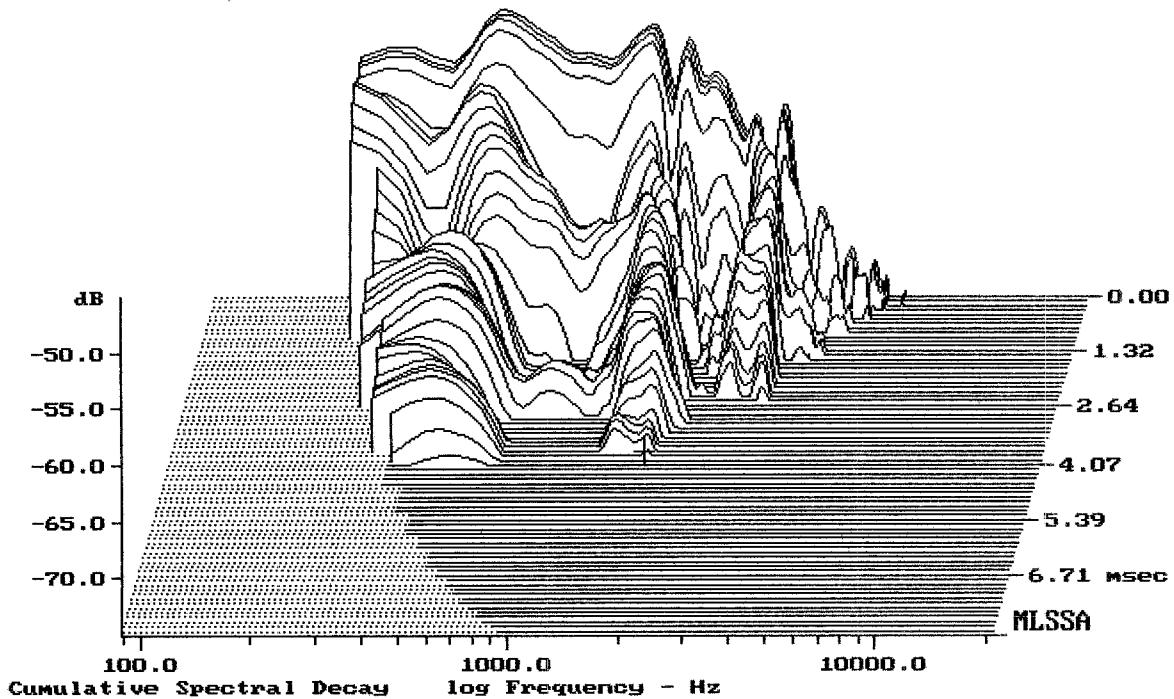

-74.70 dB, 1731 Hz (39), 3.850 msec (36)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.82	Ohms
2	Fs	55.80	Hz
3	Re	9.83	Ohms[dc]
4	Res	115.27	Ohms
5	Qms	5.68	
6	Qes	0.48	
7	Qts	0.45	
8	L1	1.08	mH
9	L2	2.76	mH
10	R2	16.08	Ohms
11	RMSE-load	0.63	Ohms
12	Vas(Sd)	97.66	liters
13	Mms	90.88	grams
14	Cms	90	$\mu\text{M}/\text{Newton}$
15	B1	25.43	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.5% (-20% to -50% is recommended).

KRIX KX-8700

MLSSA: Parameters

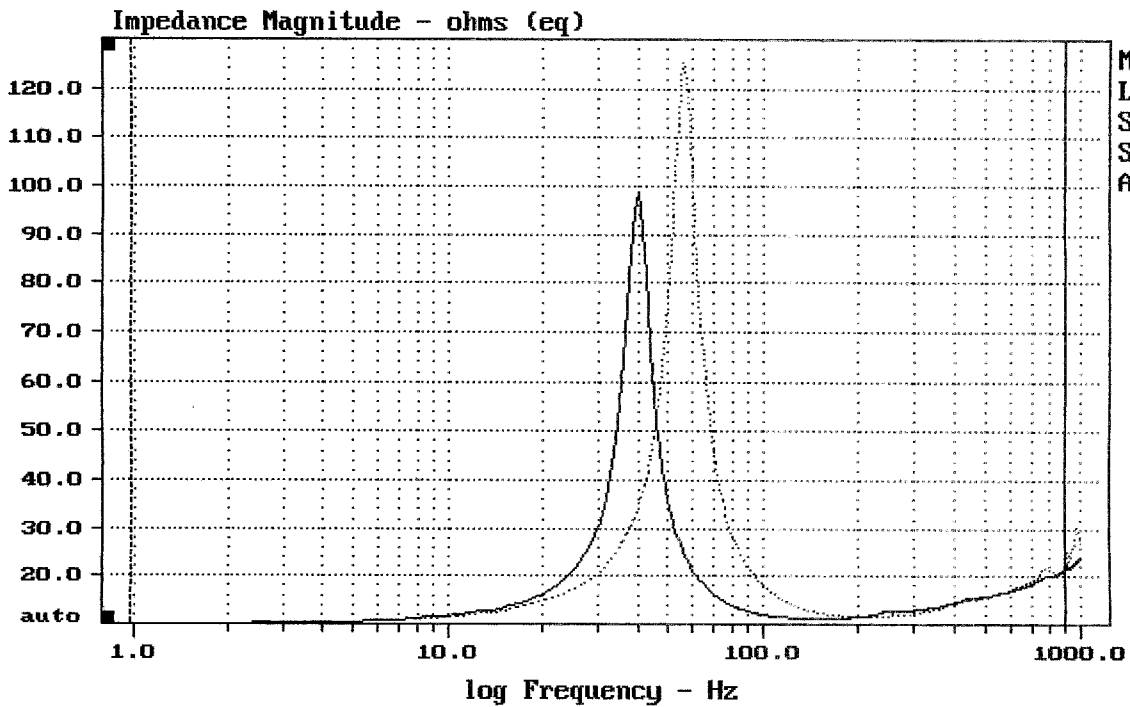

mean: 18.48, rms: 22.28, std: 12.45, max: 125.2, min: 10.01

MLSSA: Frequency Domain