


Level (55:2009 Hz) = 91.79 dB SPL/watt (8 ohms, @1.50 meters)

PD.186/2

MLSSA: Frequency Domain

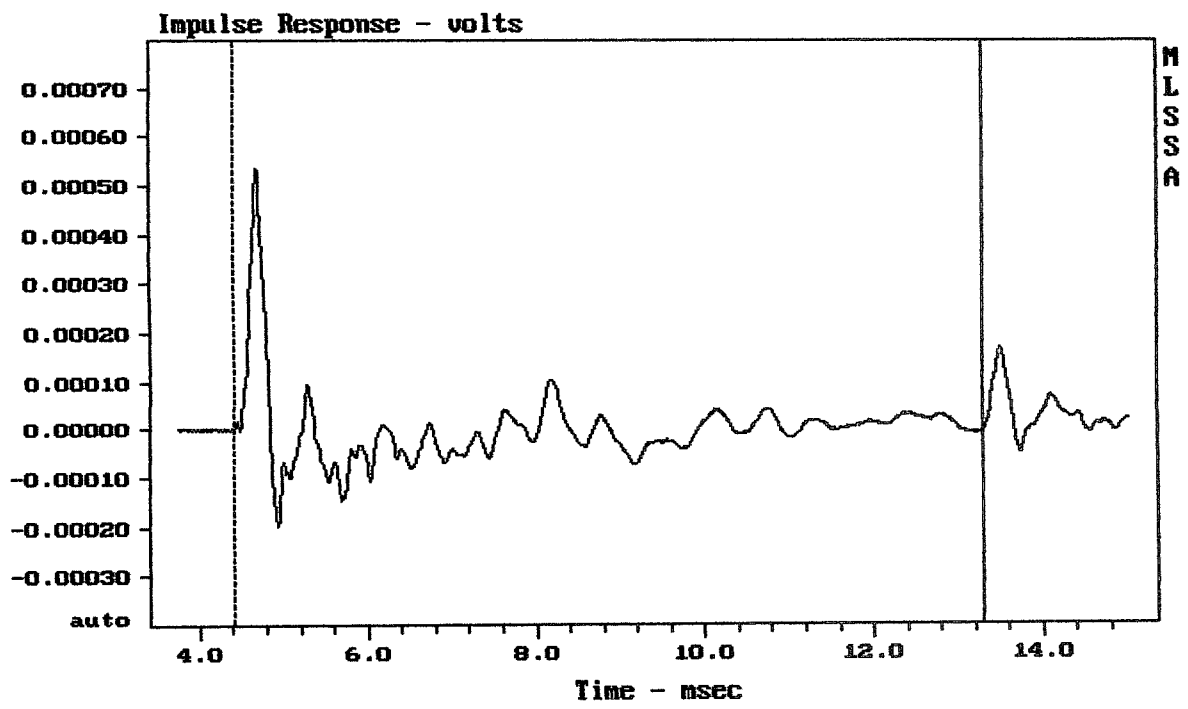

mean: -1.644e-006, rms: 7.711e-005, std: 7.709e-005, max: 0.0005364, min: -0.0

PD.186/2

MLSSA: Time Domain

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.80	Ohms
2	Fs	37.36	Hz
3	Re	6.52	Ohms[dc]
4	Res	94.15	Ohms
5	Qms	9.60	
6	Qes	0.67	
7	Qts	0.62	
8	L1	1.83	mH
9	L2	2.56	mH
10	R2	10.46	Ohms
11	RMSE-load	0.79	Ohms
12	Vas(Sd)	182.24	liters
13	Mms	189.57	grams
14	Cms	96	$\mu\text{M}/\text{Newton}$
15	B1	20.89	Tesla-M
16	SPLref(Sd)	93.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1164.16 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.1% (-20% to -50% is recommended).

PD186/2 80HM

MLSSA: Parameters

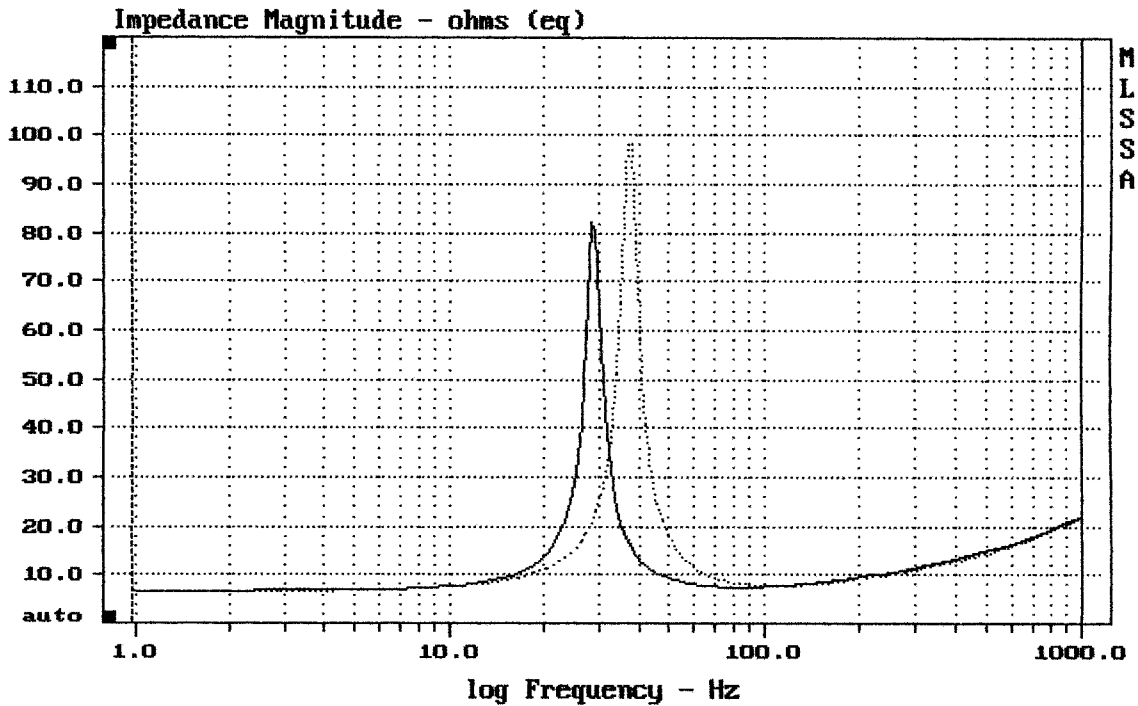

mean: 15.24, rms: 16.81, std: 7.092, max: 99.14, min: 6.639

MLSSA: Frequency Domain