


Level (100:1931 Hz) = 96.85 dB SPL/watt (8 ohms, @1.50 meters)

PD.1852

MLSSA: Frequency Domain

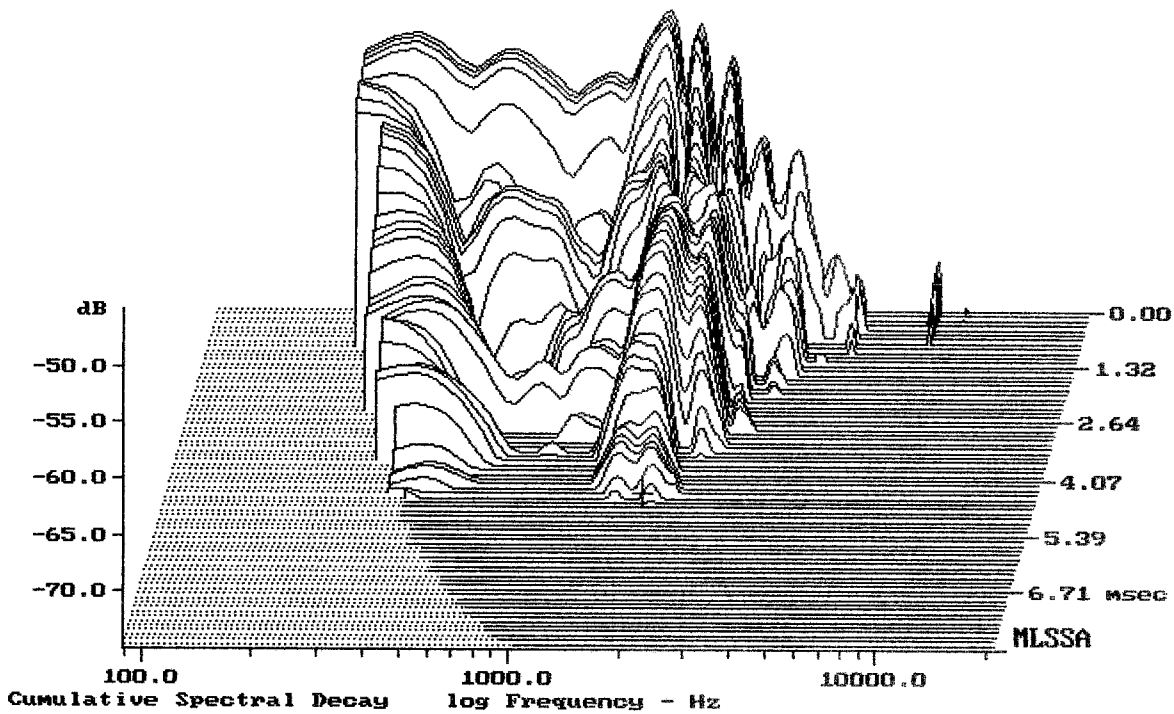

-74.56 dB, 1776 Hz (40), 4.510 msec (42)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.29	Ohms
2	Fs	54.10	Hz
3	Re	5.19	Ohms[dc]
4	Res	121.31	Ohms
5	Qms	9.53	
6	Qes	0.41	
7	Qts	0.39	
8	L1	1.08	mH
9	L2	1.75	mH
10	R2	9.43	Ohms
11	RMSE-load	1.39	Ohms
12	Vas(Sd)	67.11	liters
13	Mms	233.02	grams
14	Cms	37	$\mu\text{M}/\text{Newton}$
15	B1	31.76	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (230.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.7% (-20% to -50% is recommended).

PD.1852

MLSSA: Parameters

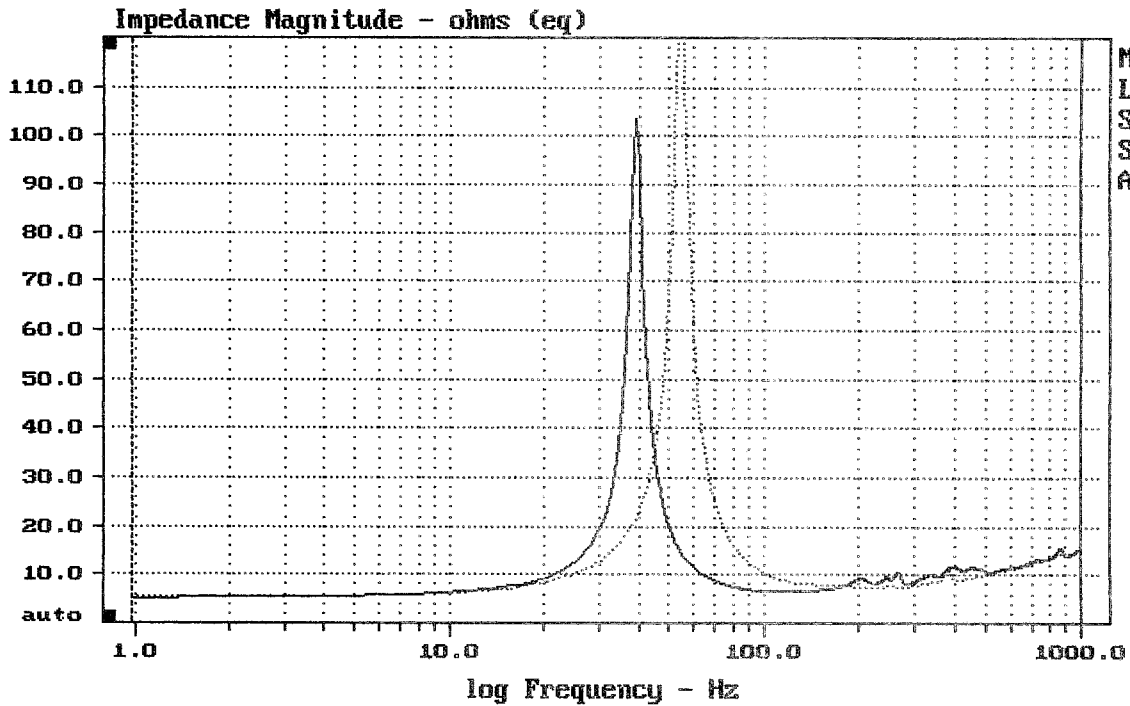

mean: 12.41, rms: 15.92, std: 9.979, max: 125.9, min: 5.322

MLSSA: Frequency Domain