


Level (55:799 Hz) = 92.34 dB SPL/watt (8 ohms, @1.50 meters)

LF18N405

MLSSA: Frequency Domain

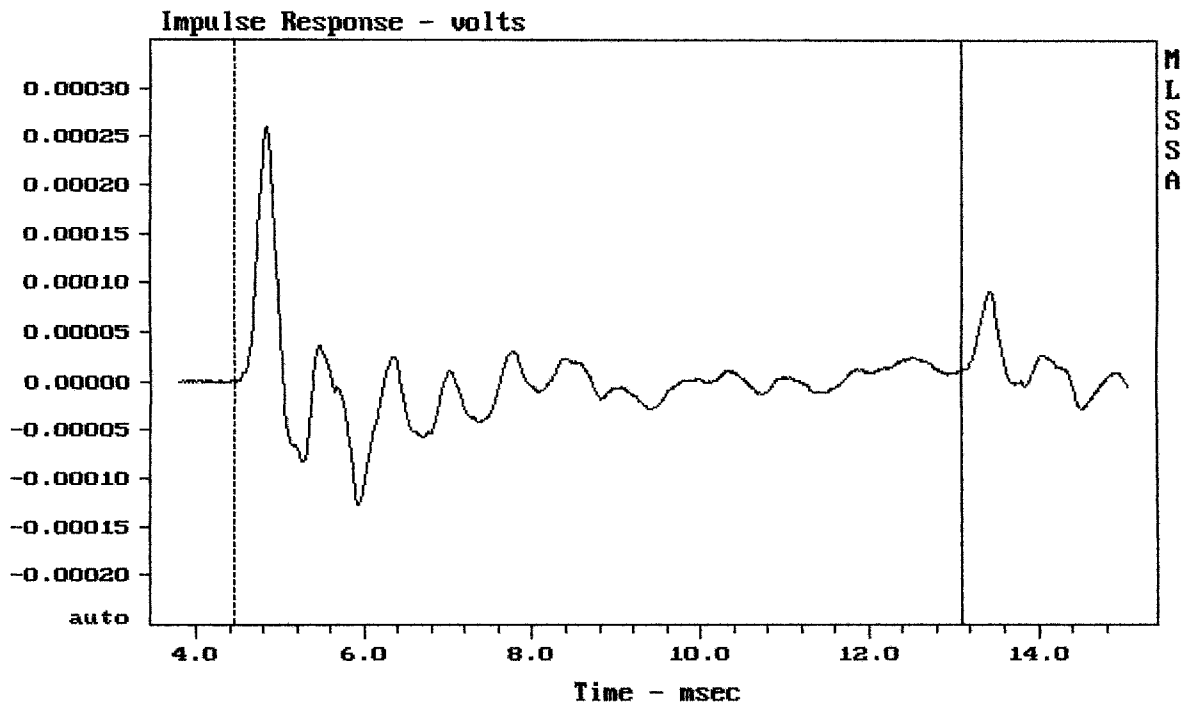

mean: $-8.399e-007$, rms: $4.561e-005$, std: $4.56e-005$, max: 0.0002611, min: -0.00

LF18N405

MLSSA: Time Domain

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.85	Ohms	
2	Fs	36.08	Hz	
3	Re	4.65	Ohms[dc]	
4	Res	95.13	Ohms	
5	Qms	8.04		
6	Qes	0.39		
7	Qts	0.37		
8	L1	2.19	mH	
9	L2	3.14	mH	
10	R2	12.76	Ohms	
11	RMSE-load	0.90	Ohms	
12	Vas(Sd)	201.92	liters	
13	Mms	203.25	grams	
14	Cms	96	$\mu\text{M}/\text{Newton}$	
15	B1	23.35	Tesla-M	
16	SPLref(Sd)	95.7	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (140.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.6% (-20% to -50% is recommended).

LF18N405

MLSSA: Parameters

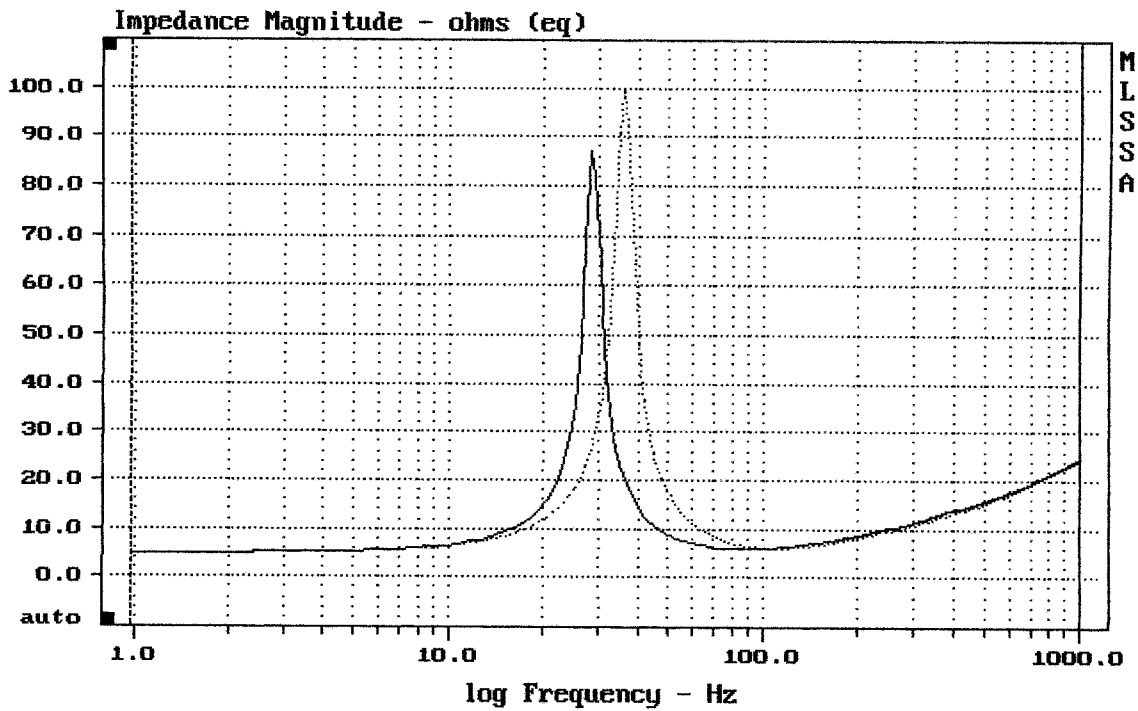

mean: 15.94, rms: 17.87, std: 8.884, max: 99.29, min: 4.766

MLSSA: Frequency Domain