


Level (100:2996 Hz) = 93.36 dB SPL/watt (8 ohms, @1.50 meters)

RH SOUND PP-0815

MLSSA: Frequency Domain

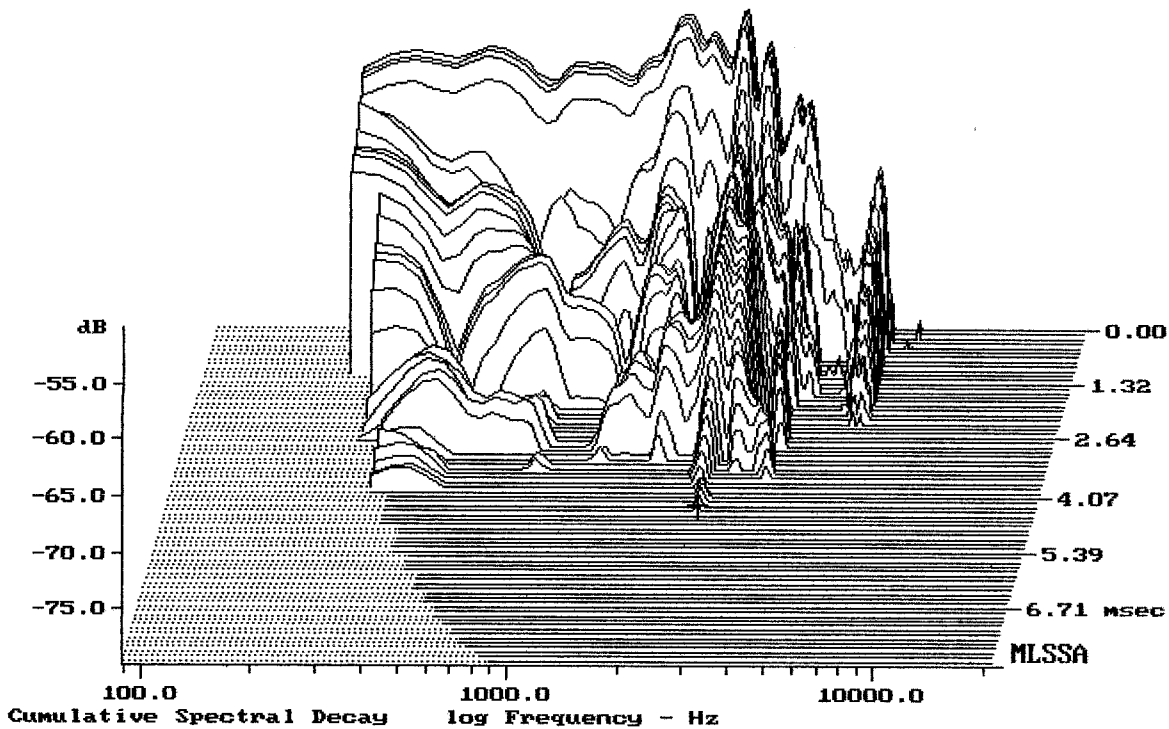

-79.54 dB, 2530 Hz (57), 4.400 msec (41)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	35.24	Hz
3	Re	6.70	Ohms[dc]
4	Res	141.12	Ohms
5	Qms	19.80	
6	Qes	0.94	
7	Qts	0.90	
8	L1	0.97	mH
9	L2	1.29	mH
10	R2	4.64	Ohms
11	RMSE-load	0.24	Ohms
12	Vas(Sd)	228.80	liters
13	Mms	91.58	grams
14	Cms	223	$\mu\text{M}/\text{Newton}$
15	B1	12.02	Tesla-M
16	SPLref(Sd)	92.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.7% (-20% to -50% is recommended).

RH SOUND PP-0815

MLSSA: Parameters

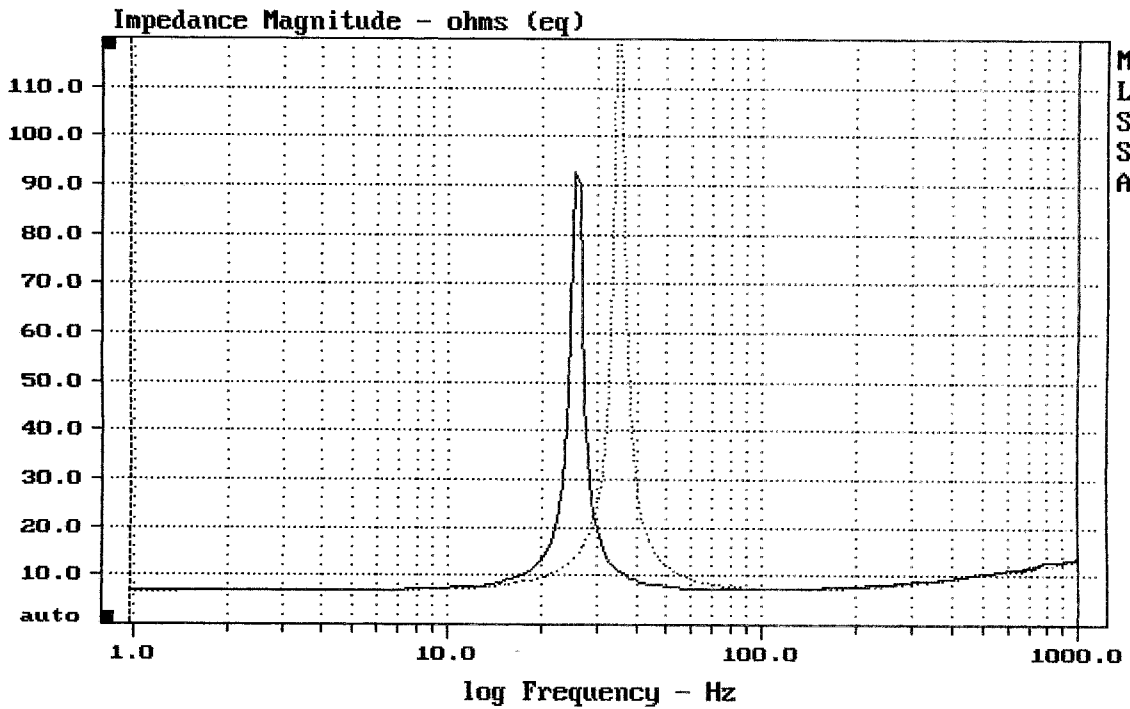

mean: 10.79, rms: 12.78, std: 6.844, max: 146.8, min: 6.801

MLSSA: Frequency Domain