

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.22	Ohms
2	Fs	46.65	Hz
3	Re	5.12	Ohms[dc]
4	Res	41.40	Ohms
5	Qms	4.34	
6	Qes	0.54	
7	Qts	0.48	
8	L1	0.51	mH
9	L2	0.73	mH
10	R2	1.80	Ohms
11	RMSE-load	0.20	Ohms
12	Vas(Sd)	122.77	liters
13	Mms	34.73	grams
14	Cms	335	$\mu\text{M}/\text{Newton}$
15	B1	9.85	Tesla-M
16	SPLref(Sd)	95.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.7% (-20% to -50% is recommended).


12HPL51

MLSSA: Parameters

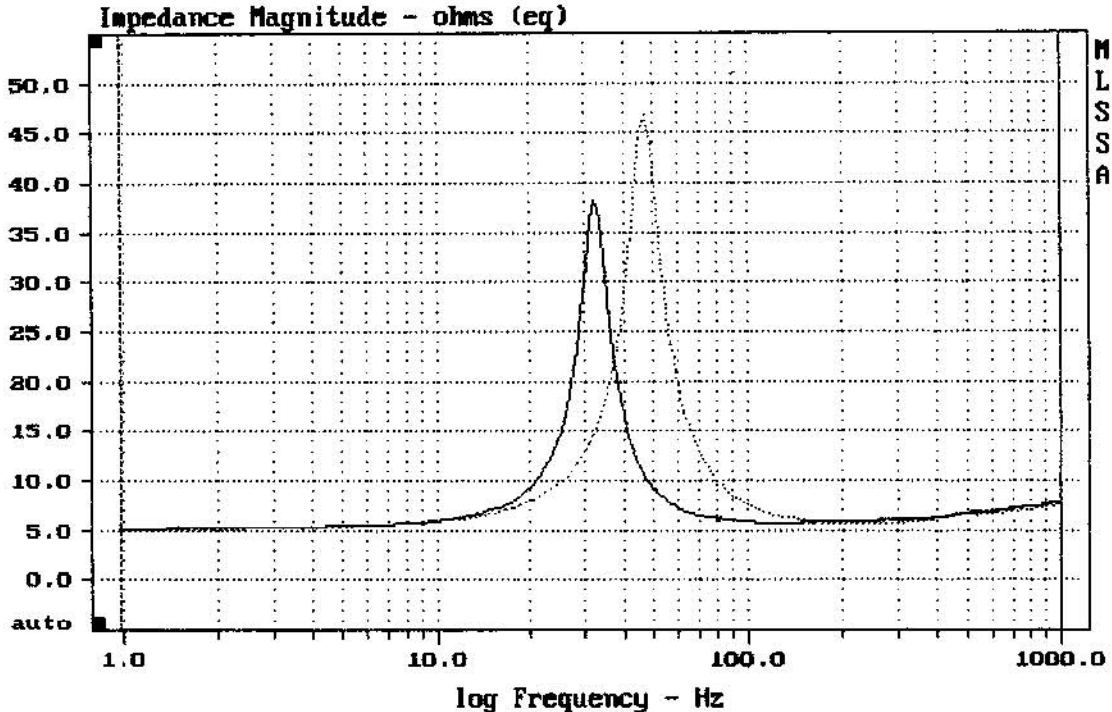

CURSOR: dy = -0.215965 x = 1000.9766 (1025)


MLSSA: Frequency Domain

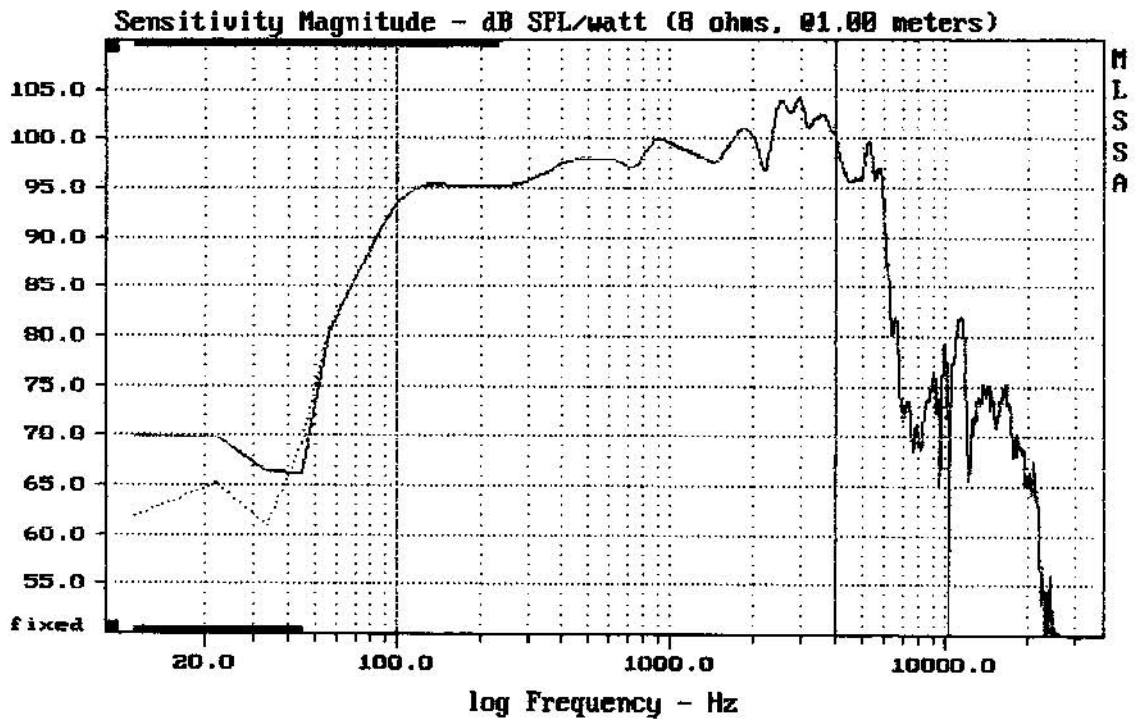

Level (100:4006 Hz) = 98.65 dB SPL/watt (8 ohms, @1.00 meters)

12HPL51

MLSSA: Frequency Domain

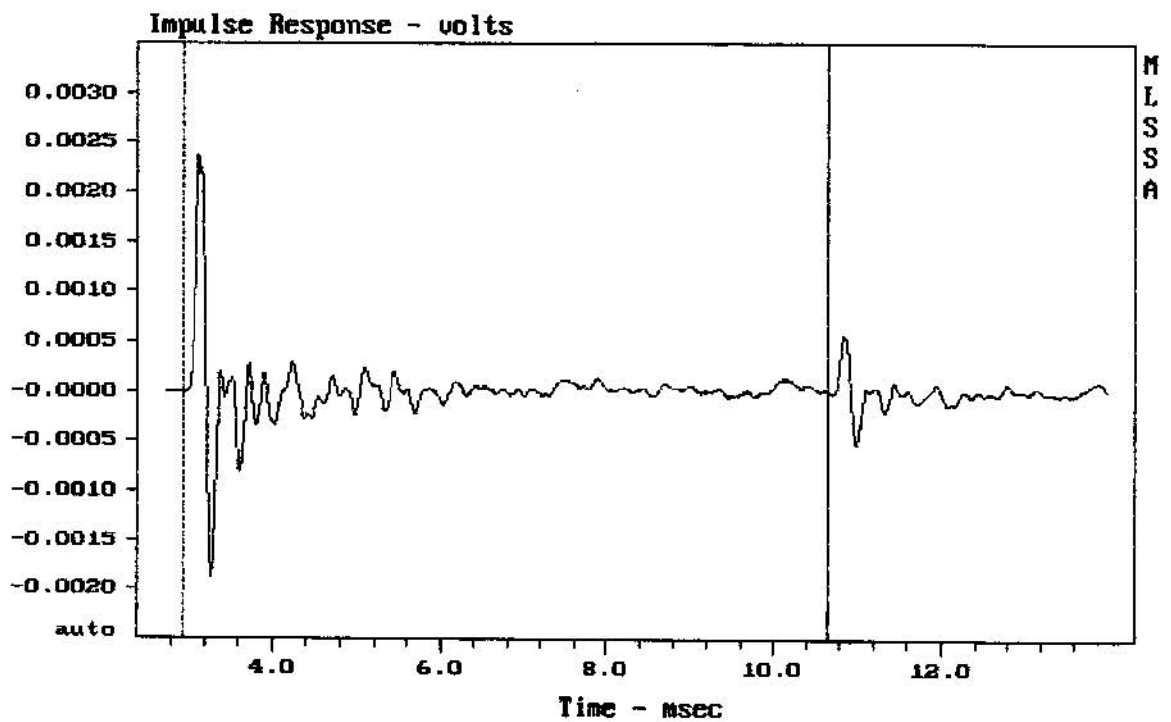

CURSOR: y = 6.93752e-006 x = 10.6590 (969)

12HPL51