

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.63	Ohms
2	Fs	56.33	Hz
3	Re	4.48	Ohms[dc]
4	Res	69.95	Ohms
5	Qms	3.73	
6	Qes	0.24	
7	Qts	0.22	
8	L1	0.76	mH
9	L2	1.28	mH
10	R2	3.38	Ohms
11	RMSE-load	0.73	Ohms
12	Vas(Sd)	70.48	liters
13	Mms	44.85	grams
14	Cms	178	$\mu\text{M}/\text{Newton}$
15	B1	17.25	Tesla-M
16	SPLref(Sd)	99.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -39.4% (-20% to -50% is recommended).


MLSSA: Parameters

12NDL76

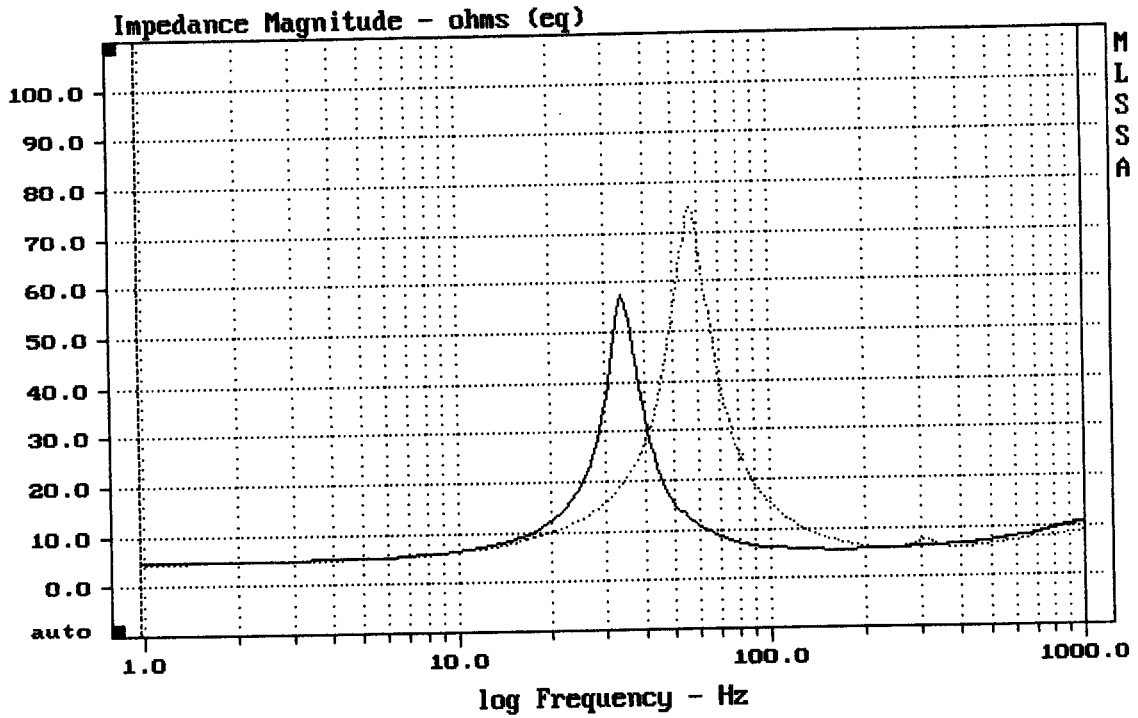

mean: 9.565, rms: 13, std: 8.801, max: 74.97, min: 4.573


MLSSA: Frequency Domain

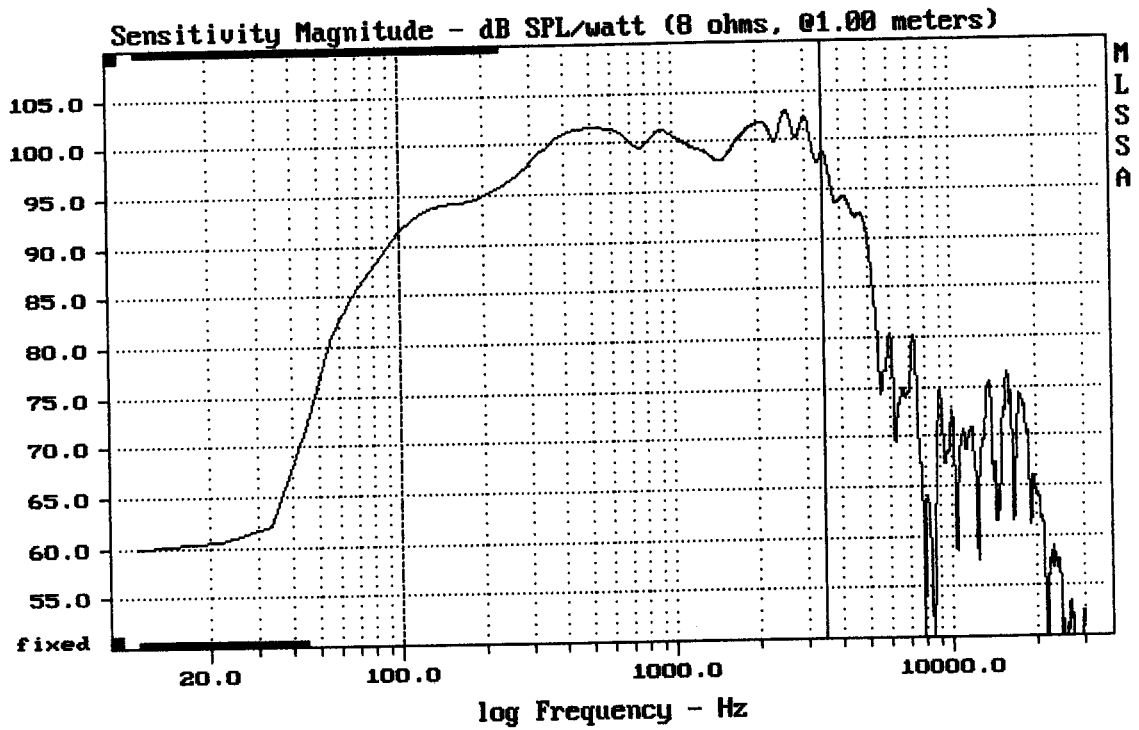

Level (100:3451 Hz) = 99.41 dB SPL/watt (8 ohms, @1.00 meters)

12NDL76

MLSSA: Frequency Domain

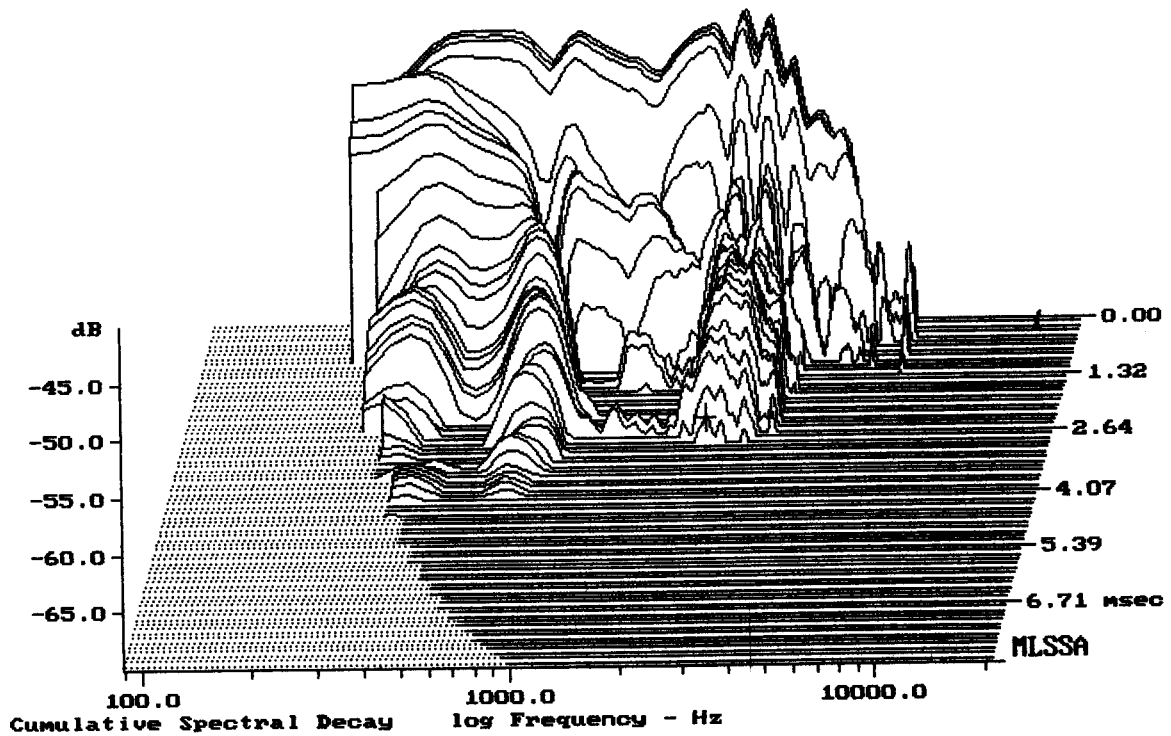

-67.82 dB, 2397 Hz (54), 2.860 msec (27)