


Level (100:4506 Hz) = 93.82 dB SPL/watt (8 ohms, @1.00 meters)

12PW8

MLSSA: Frequency Domain

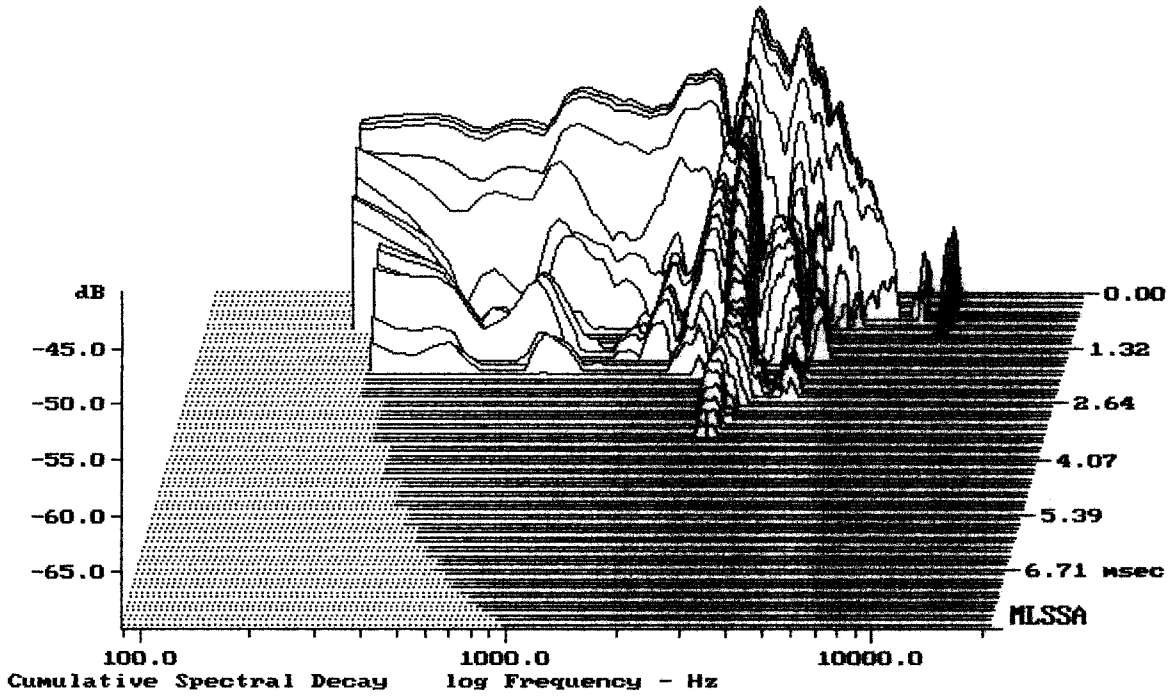

-69.40 dB, 2486 Hz (56), 3.410 msec (32)

DITO

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.56	Ohms	
2	Fs	49.83	Hz	
3	Re	5.89	Ohms[dc]	
4	Res	102.51	Ohms	
5	Qms	10.57		
6	Qes	0.61		
7	Qts	0.57		
8	L1	0.88	mH	
9	L2	1.02	mH	
10	R2	4.48	Ohms	
11	RMSE-load	0.41	Ohms	
12	Vas(Sd)	82.17	liters	
13	Mms	42.02	grams	
14	Cms	243	$\mu\text{M}/\text{Newton}$	
15	B1	11.29	Tesla-M	
16	SPLref(Sd)	94.1	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (35.00 grams)

Area (Sd): 490.87 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.9% (-20% to -50% is recommended).

12PW8

MLSSA: Parameters

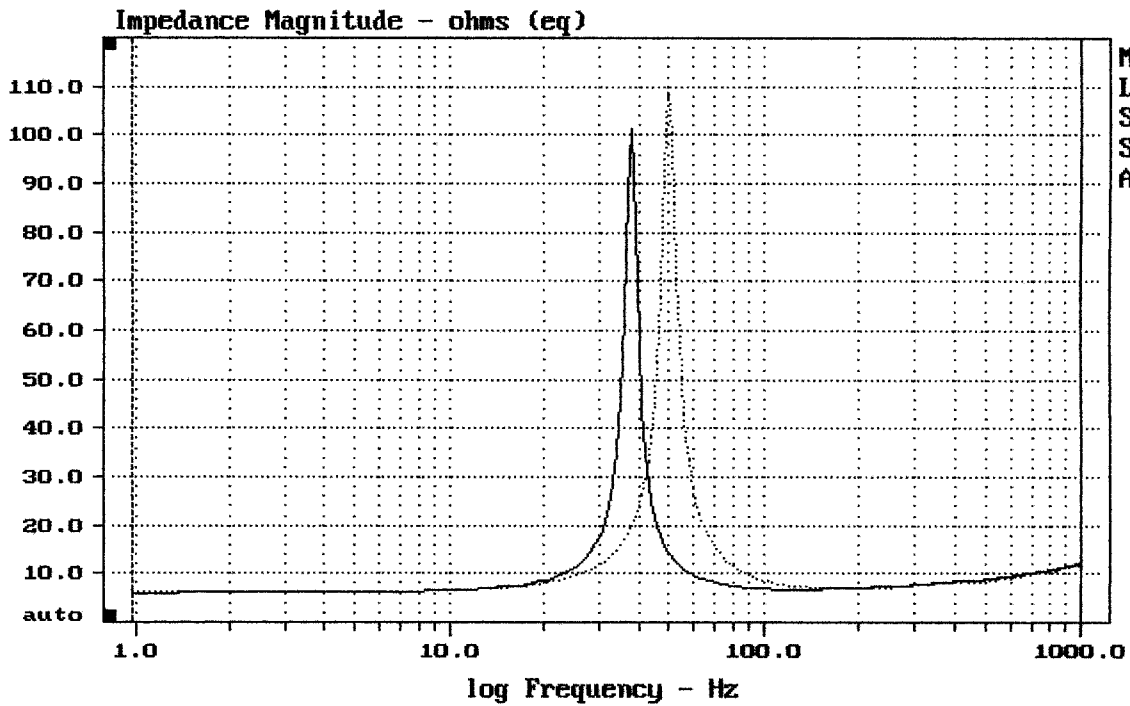

mean: 10.2, rms: 12.8, std: 7.734, max: 100.6, min: 6.044

MLSSA: Frequency Domain