


Level (100:3607 Hz) = 97.85 dB SPL/watt (4 ohms, @1.00 meters)

12NDL76-4

MLSSA: Frequency Domain

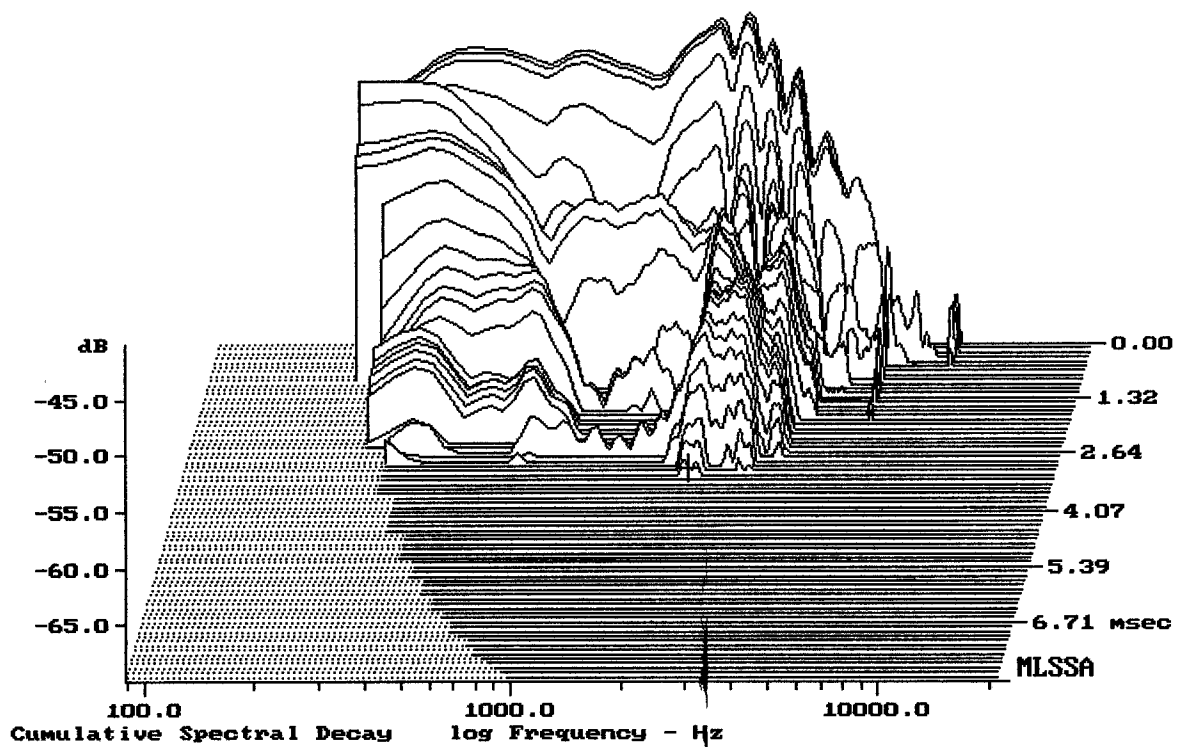

-69.40 dB, 2131 Hz (48), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	46.19	Hz
3	Re	3.07	Ohms[dc]
4	Res	87.48	Ohms
5	Qms	5.97	
6	Qes	0.21	
7	Qts	0.20	
8	L1	0.49	mH
9	L2	0.81	mH
10	R2	2.27	Ohms
11	RMSE-load	0.34	Ohms
12	Vas(Sd)	105.98	liters
13	Mms	44.34	grams
14	Cms	268	$\mu\text{M}/\text{Newton}$
15	Bl	13.73	Tesla-M
16	SPLref(Sd)	98.8	dB[Re]
17	Rub-index	0.05	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.4% (-20% to -50% is recommended).

12NDL76-4

MLSSA: Parameters

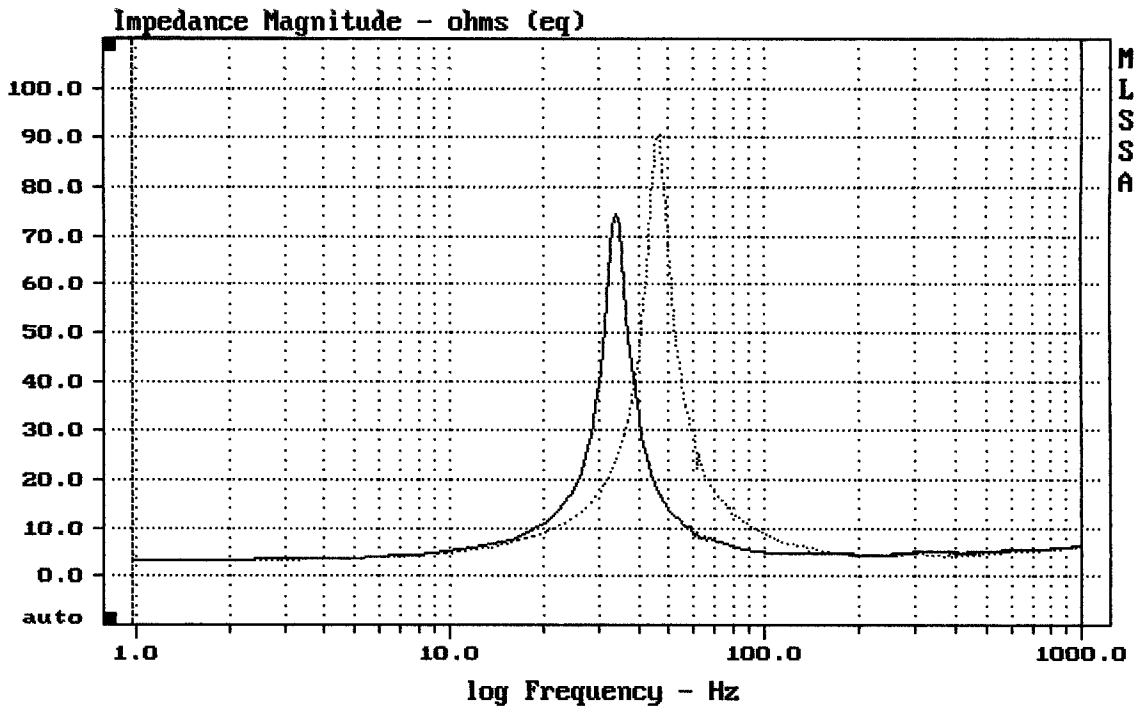

mean: 6.884, rms: 10.92, std: 8.476, max: 90.43, min: 3.202

MLSSA: Frequency Domain