


Level (100:5504 Hz) = 99.23 dB SPL/watt (4 ohms, @1.00 meters)

12PE32-4

MLSSA: Frequency Domain

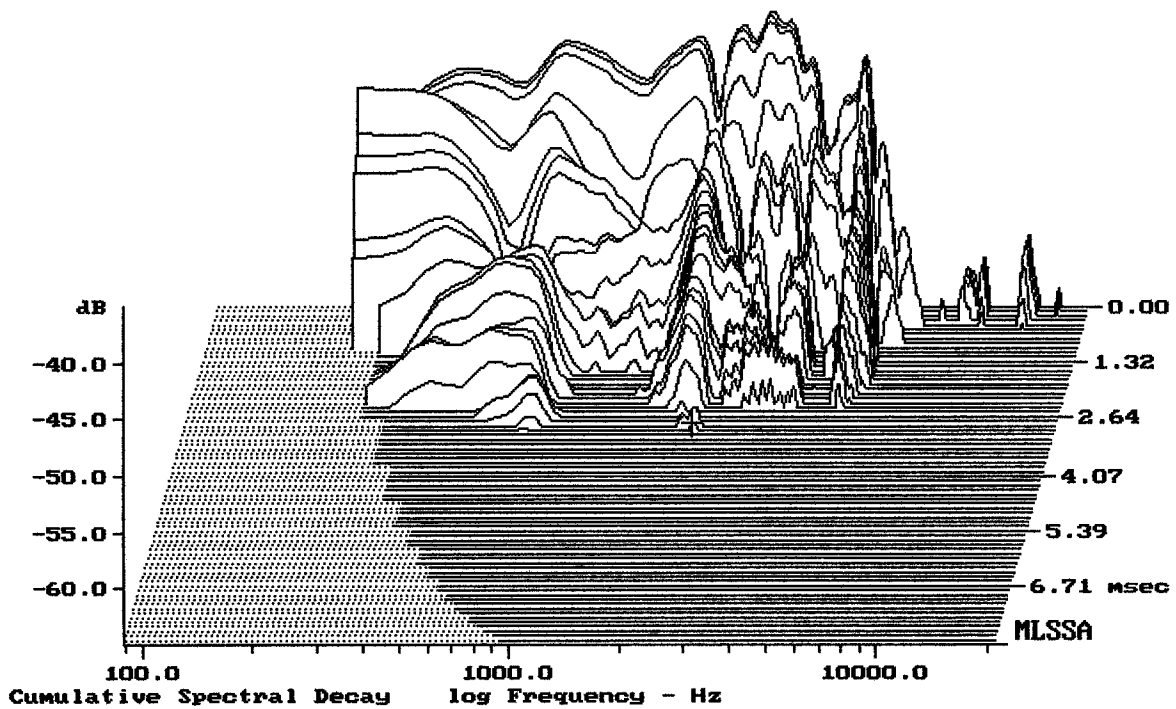

-64.30 dB, 2175 Hz (49), 2.970 msec (28)

Line	Parameter	Value	Units
1	RMSE-free	0.88	Ohms
2	Fs	59.70	Hz
3	Re	3.37	Ohms[dc]
4	Res	90.71	Ohms
5	Qms	5.69	
6	Qes	0.21	
7	Qts	0.20	
8	L1	0.33	mH
9	L2	0.98	mH
10	R2	3.03	Ohms
11	RMSE-load	0.53	Ohms
12	Vas(Sd)	77.90	liters
13	Mms	36.13	grams
14	Cms	197	μ M/Newton
15	B1	14.70	Tesla-M
16	SPLref(Sd)	100.8	dB[Re]
17	Rub-index	0.07	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.13 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.4% (-20% to -50% is recommended).

12PE32-4

MLSSA: Parameters

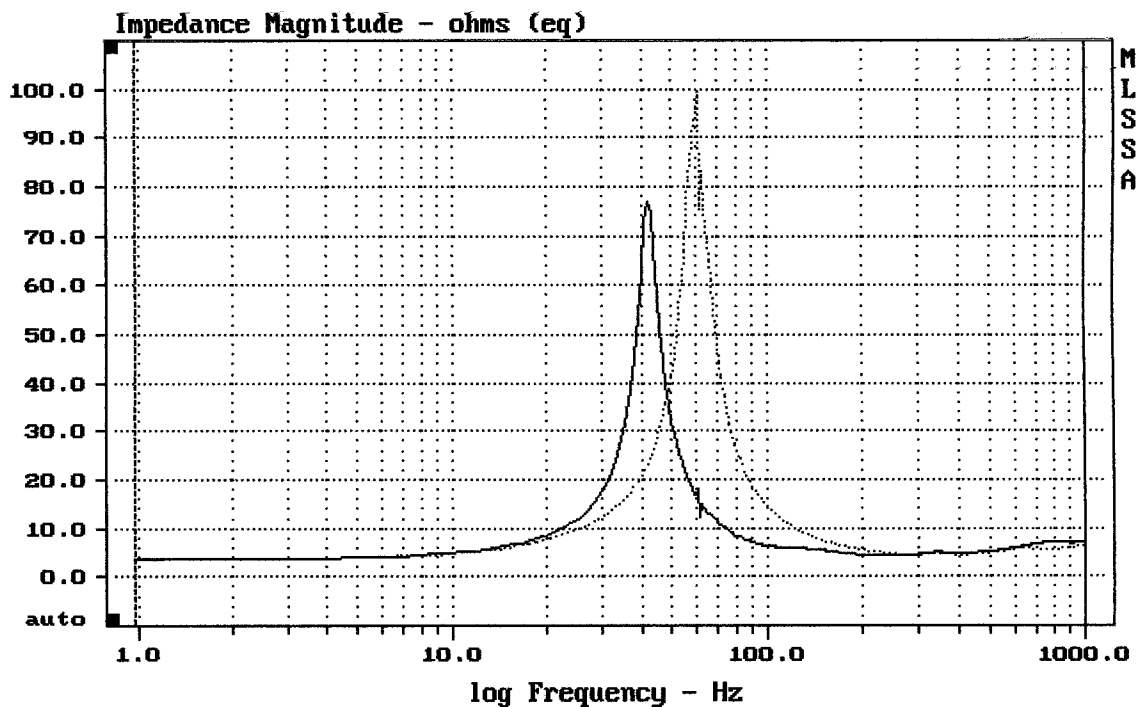

mean: 7.915, rms: 12.84, std: 10.11, max: 99.42, min: 3.519

MLSSA: Frequency Domain