

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.72	Ohms
2	Fs	40.41	Hz
3	Re	5.92	Ohms[dc]
4	Res	369.54	Ohms
5	Qms	19.49	
6	Qes	0.31	
7	Qts	0.31	
8	L1	0.86	mH
9	L2	1.14	mH
10	R2	4.90	Ohms
11	RMSE-load	0.89	Ohms
12	Vas(Sd)	115.91	liters
13	Mms	48.89	grams
14	Cms	317	$\mu\text{M}/\text{Newton}$
15	B1	15.34	Tesla-M
16	SPLref(Sd)	95.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 510.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.9% (-20% to -50% is recommended).


SELENIUM 12PW5

MLSSA: Parameters

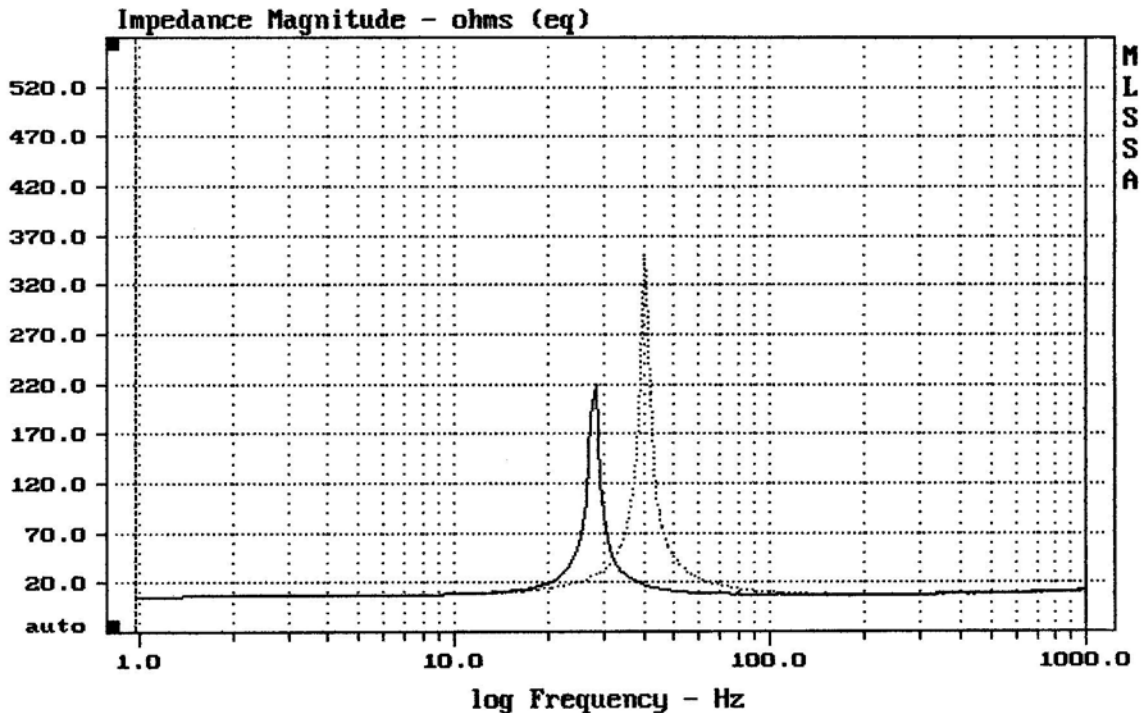

CURSOR: dy = -0.286116 x = 1000.9766 (1025)


MLSSA: Frequency Domain

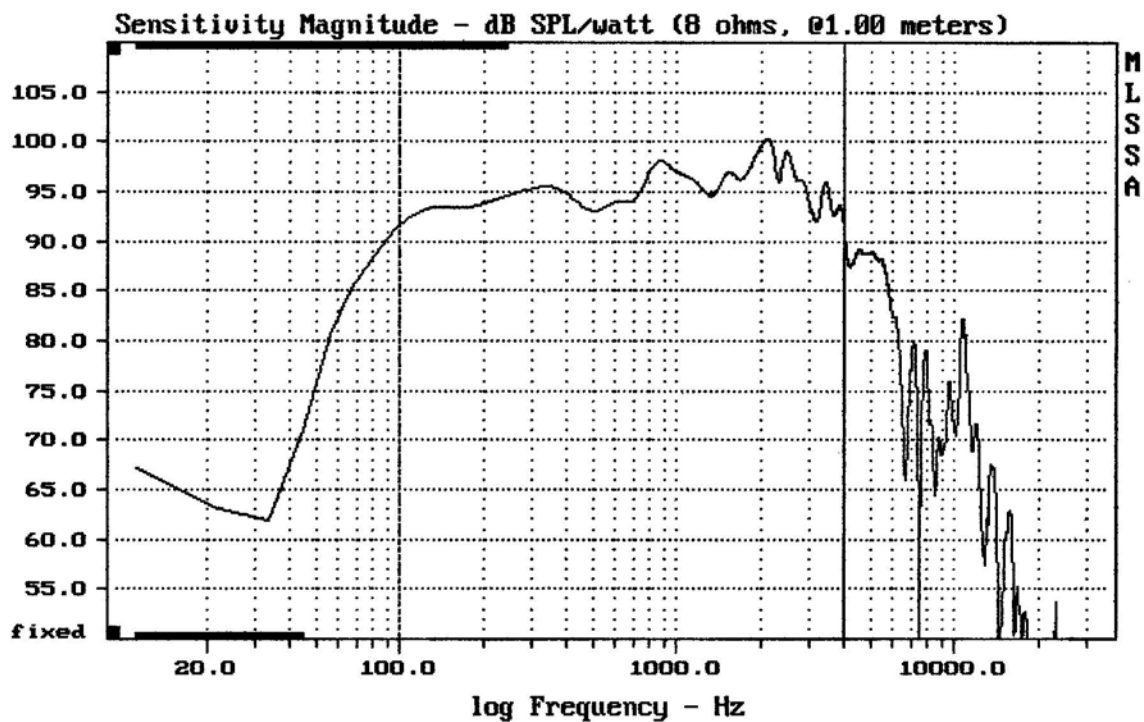

Level (100:3995 Hz) = 95.48 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12PW5

MLSSA: Frequency Domain

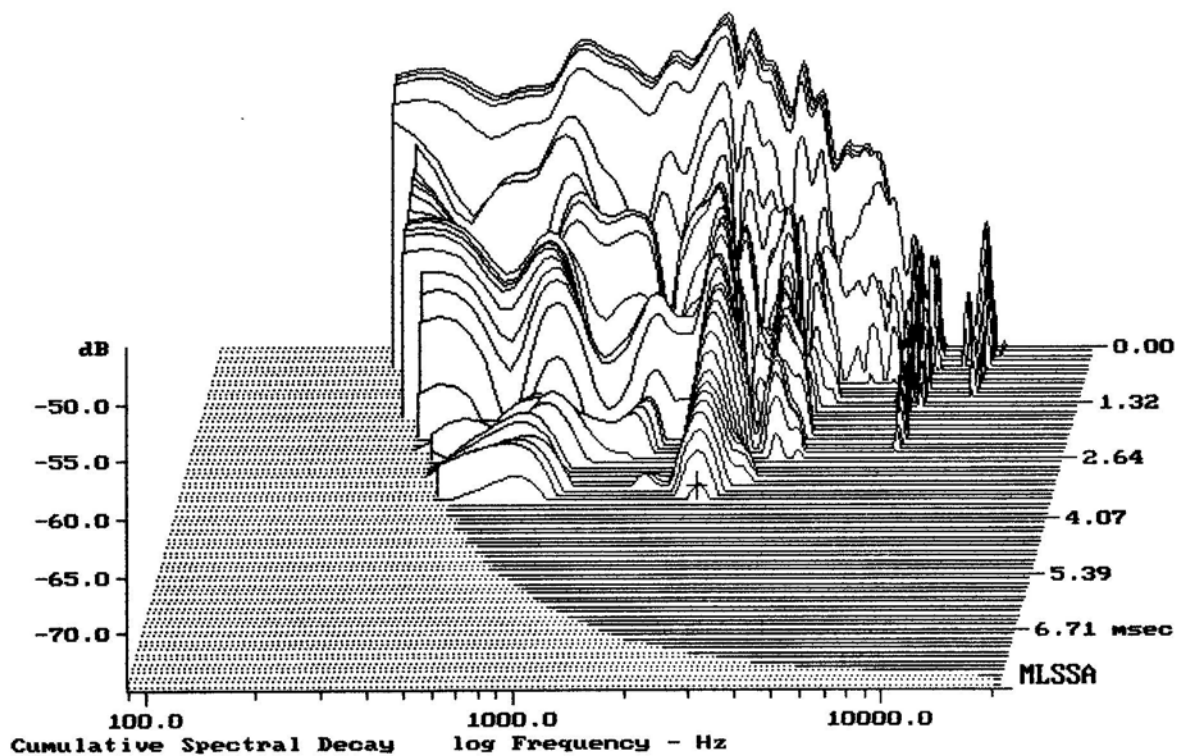

-73.73 dB, 2264 Hz (51), 3.630 msec (34)