


Level (67:4006 Hz) = 92.40 dB SPL/watt (4 ohms, 01.00 meters)

SELENIUM 12PW5A - 4ohm

MLSSA: Frequency Domain

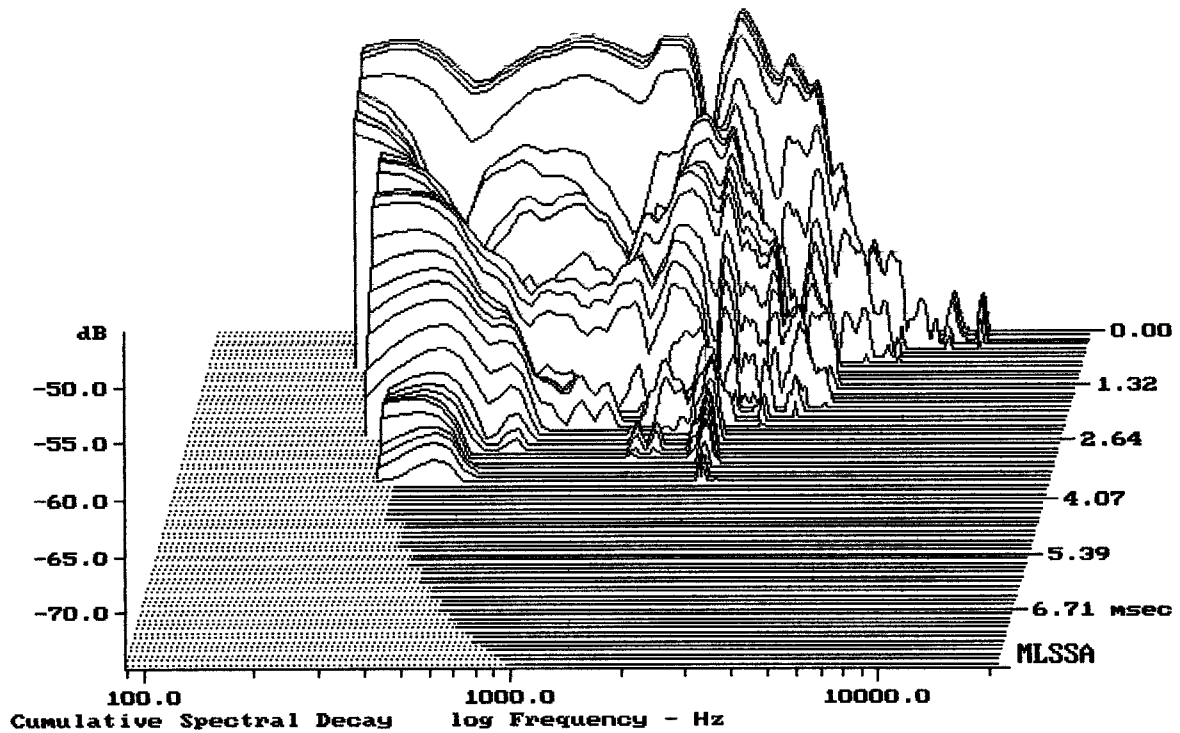

-73.37 dB, 2397 Hz (54), 3.630 msec (34)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.32	Ohms
2	Fs	49.91	Hz
3	Re	3.06	Ohms[dc]
4	Res	128.91	Ohms
5	Qms	15.59	
6	Qes	0.37	
7	Qts	0.36	
8	L1	0.67	mH
9	L2	0.77	mH
10	R2	3.00	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	74.93	liters
13	Mms	49.71	grams
14	Cms	205	$\mu\text{M}/\text{Newton}$
15	B1	11.35	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.0% (-20% to -50% is recommended).

12PW5A 4ohm

MLSSA: Parameters

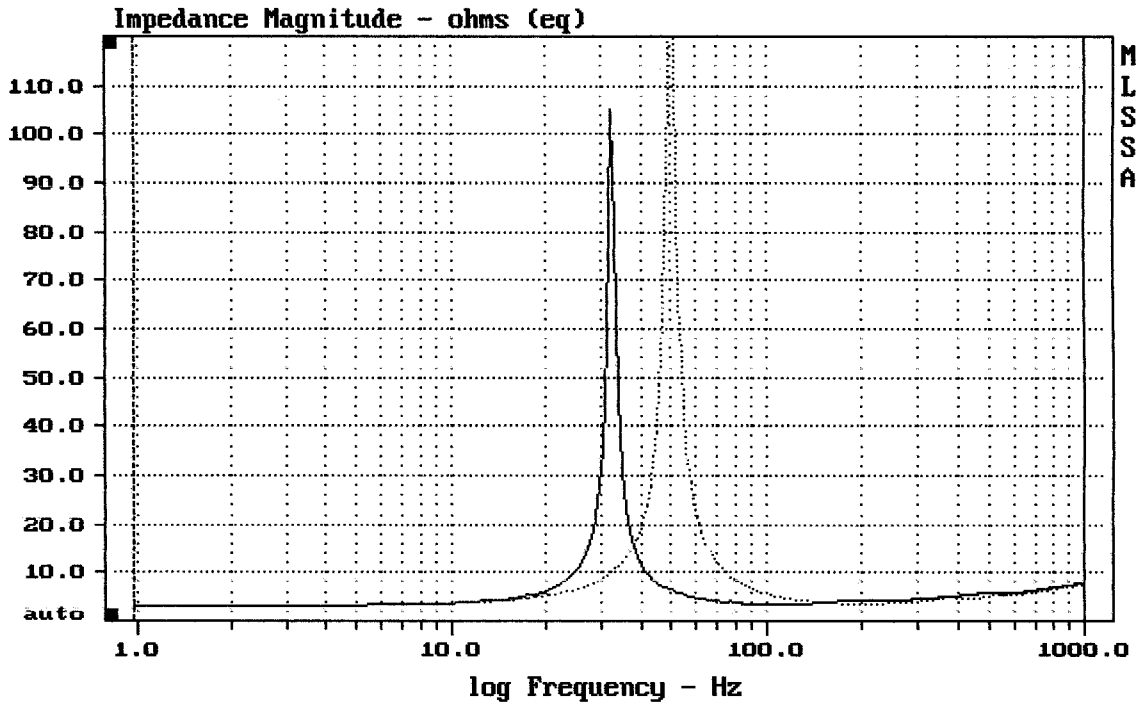

mean: 6.626, rms: 10.68, std: 8.374, max: 132.5, min: 3.113

MLSSA: Frequency Domain