


SELENIUM 12SW10A DVC 4+4ohm

MLSSA: Frequency Domain

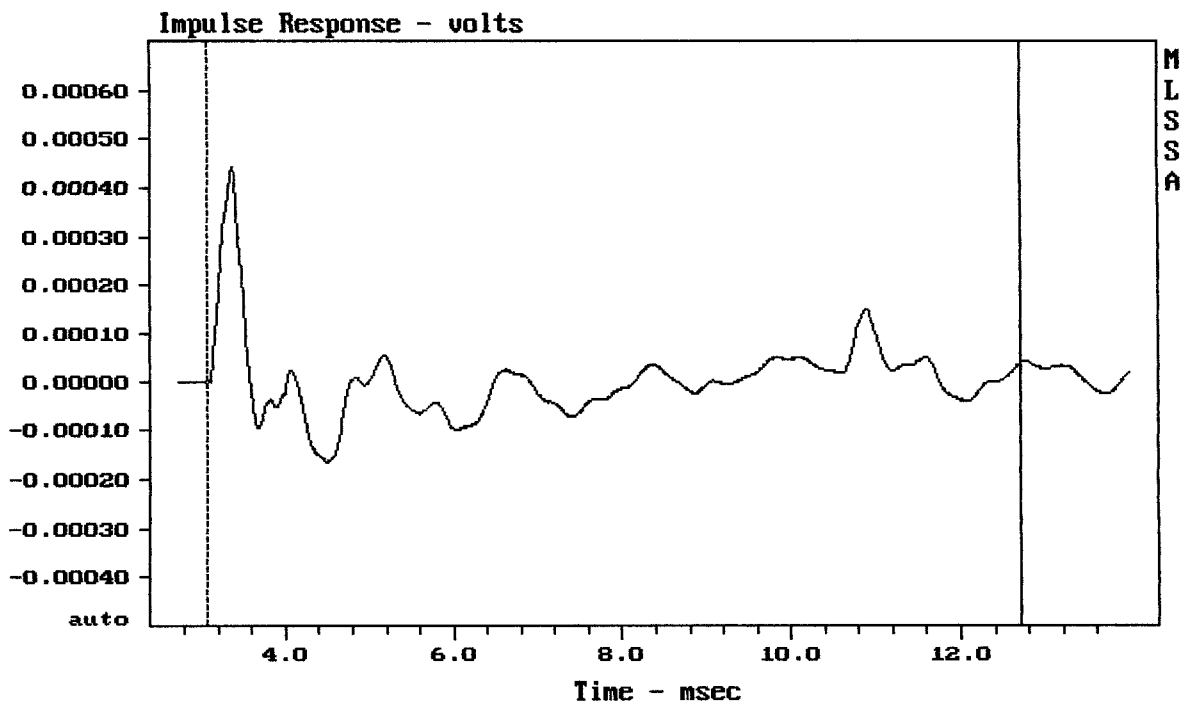

SELENIUM 12SW10A DVC 4+4ohm

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.27	Ohms
2	Fs	41.26	Hz
3	Re	6.92	Ohms[dc]
4	Res	43.56	Ohms
5	Qms	5.23	
6	Qes	0.83	
7	Qts	0.72	
8	L1	3.28	mH
9	L2	4.42	mH
10	R2	13.71	Ohms
11	RMSE-load	1.28	Ohms
12	Vas(Sd)	78.52	liters
13	Mms	69.42	grams
14	Cms	214	μ M/Newton
15	B1	12.24	Tesla-M
16	SPLref(Sd)	90.0	dB[Re]
17	Rub-index	0.27	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.7% (-20% to -50% is recommended).

12SW10A DVC 4+4ohm

MLSSA: Parameters

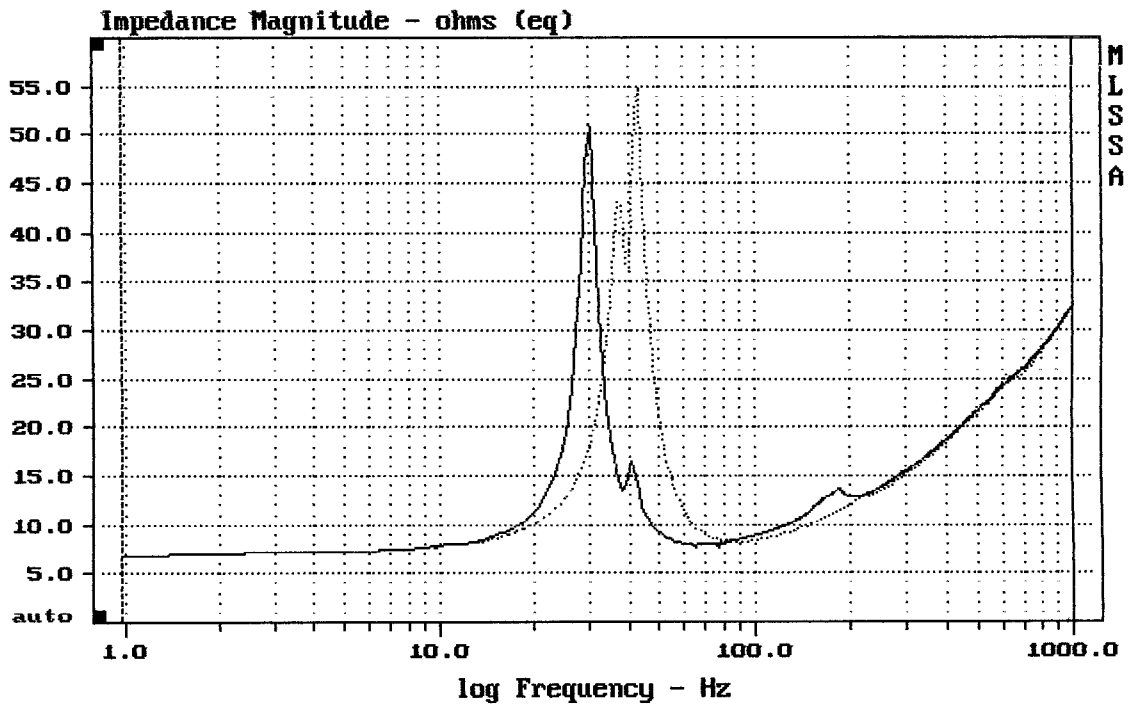

mean: 21.01, rms: 22.36, std: 7.65, max: 54.65, min: 6.912

MLSSA: Frequency Domain