


Level (67:1210 Hz) = 84.95 dB SPL/watt (8 ohms, @1.00 meters)

SELENIUM 12SW11A DVC 4+4ohm

MLSSA: Frequency Domain

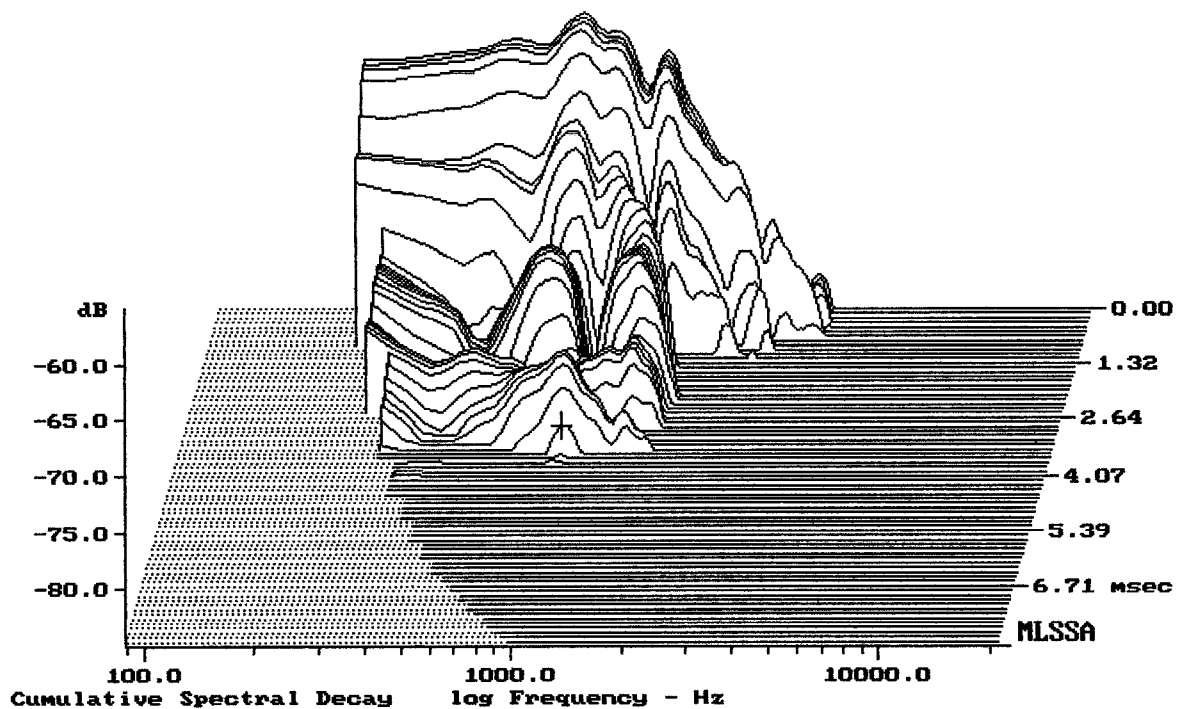

-82.43 dB, 977 Hz (22), 3.520 msec (33)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.40	Ohms
2	Fs	34.93	Hz
3	Re	7.21	Ohms[dc]
4	Res	134.94	Ohms
5	Qms	11.69	
6	Qes	0.62	
7	Qts	0.59	
8	L1	2.50	mH
9	L2	4.05	mH
10	R2	18.91	Ohms
11	RMSE-load	1.65	Ohms
12	Vas(Sd)	80.08	liters
13	Mms	94.95	grams
14	Cms	219	$\mu\text{M}/\text{Newton}$
15	B1	15.51	Tesla-M
16	SPLref(Sd)	89.2	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.5% (-20% to -50% is recommended).

12SW11A DVC 4+4ohm

MLSSA: Parameters

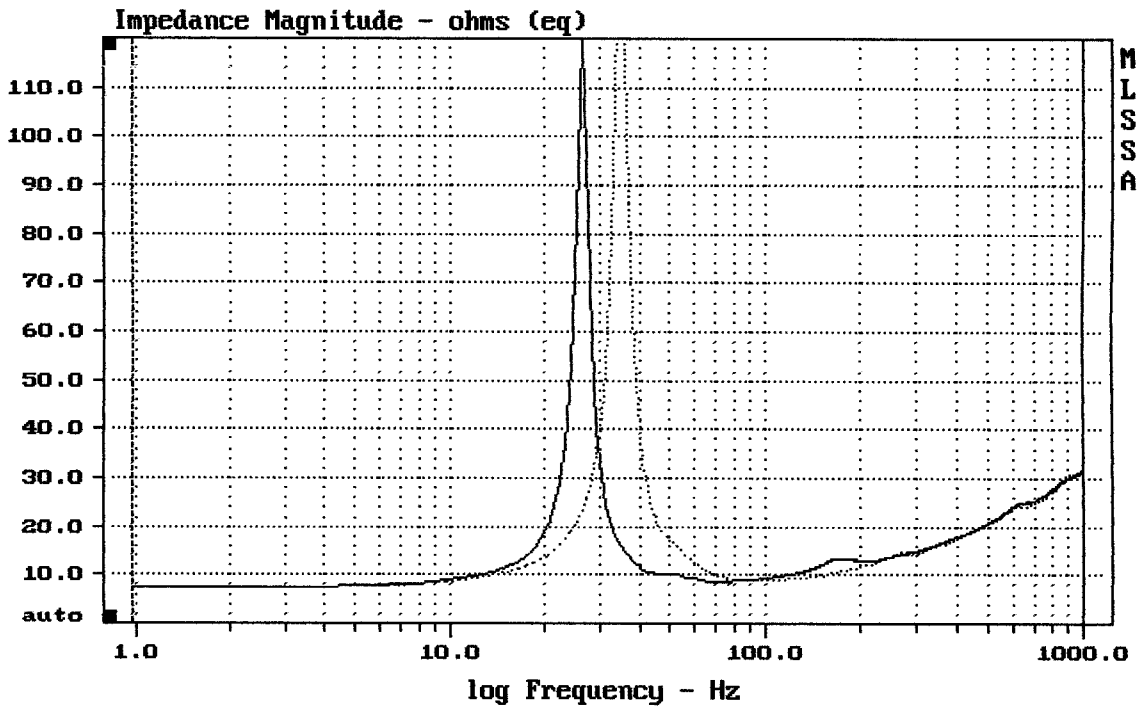

mean: 21.09, rms: 23.32, std: 9.951, max: 141.1, min: 7.246

MLSSA: Frequency Domain