


Level (67:1998 Hz) = 88.63 dB SPL/watt (4 ohms, @1.00 meters)

SELENUM 12SW8A

MLSSA: Frequency Domain

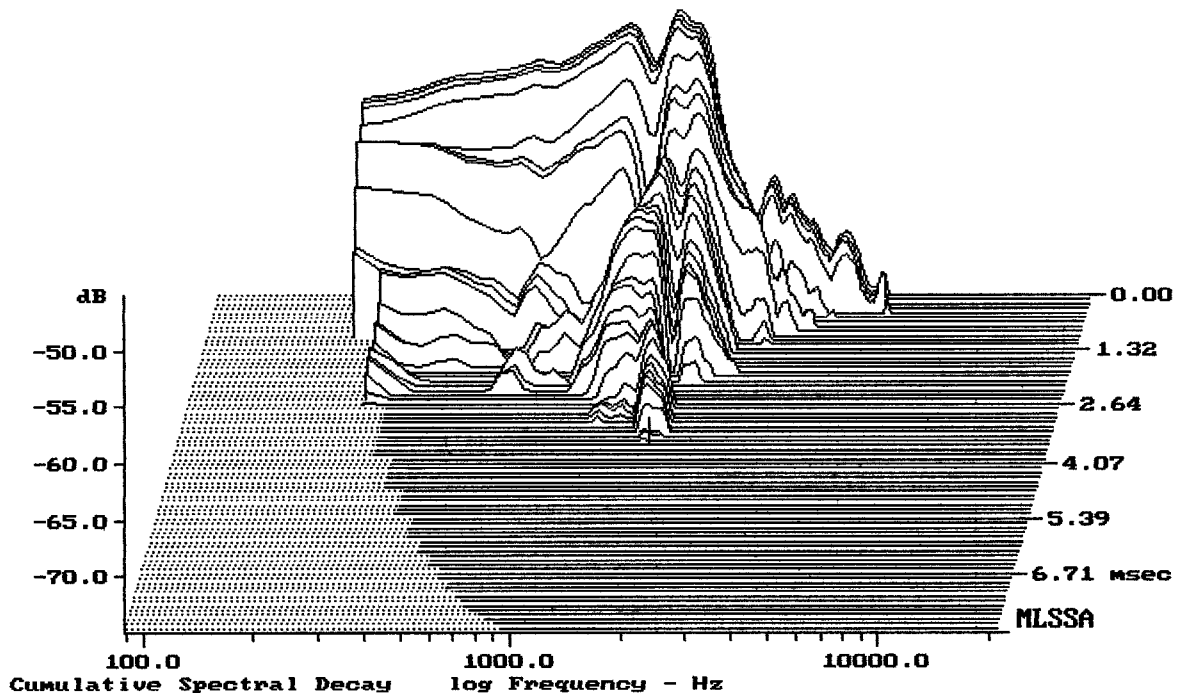

-74.62 dB, 1687 Hz (38), 3.410 msec (32)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	36.23	Hz
3	Re	3.44	Ohms[dc]
4	Res	52.91	Ohms
5	Qms	13.36	
6	Qes	0.87	
7	Qts	0.82	
8	L1	0.63	mH
9	L2	0.93	mH
10	R2	3.89	Ohms
11	RMSE-load	0.37	Ohms
12	Vas(Sd)	86.37	liters
13	Mms	81.85	grams
14	Cms	236	$\mu\text{M}/\text{Newton}$
15	Bl	8.59	Tesla-M
16	SPLref(Sd)	88.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.3% (-20% to -50% is recommended).

12SW8A

MLSSA: Parameters

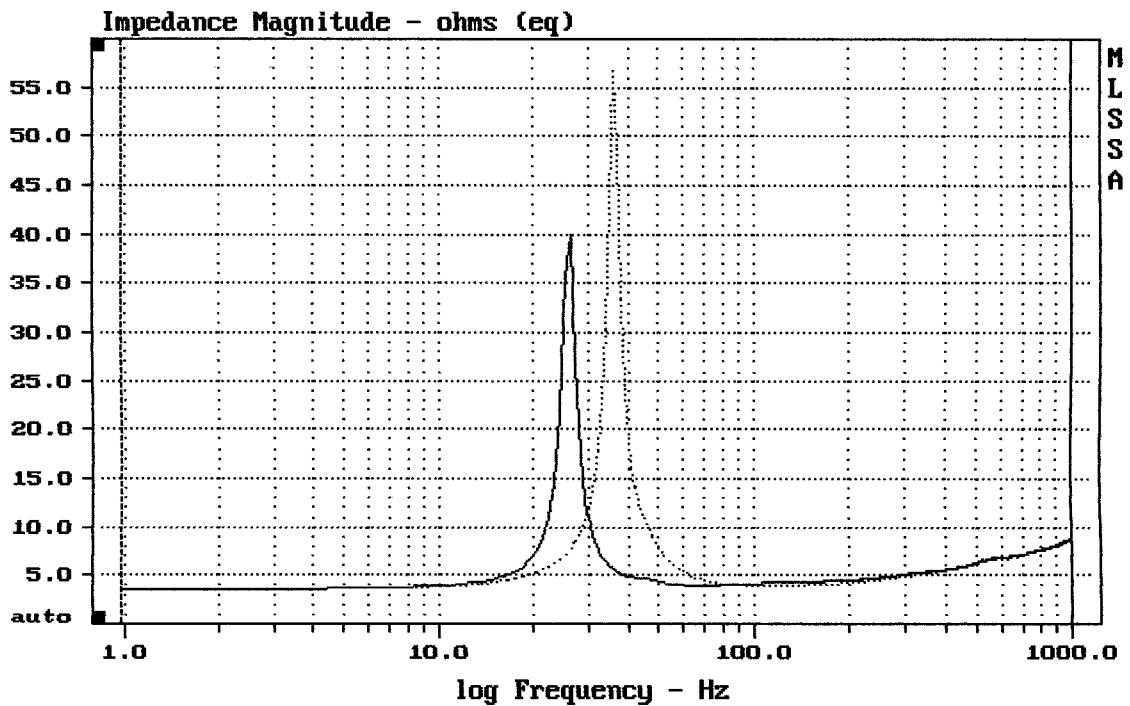

mean: 6.45, rms: 7.193, std: 3.184, max: 56.77, min: 3.512

MLSSA: Frequency Domain