


Level (100:2500 Hz) = 92.15 dB SPL/watt (4 ohms, @1.00 meters)

12W2A ONIX 4ohm

MLSSA: Frequency Domain

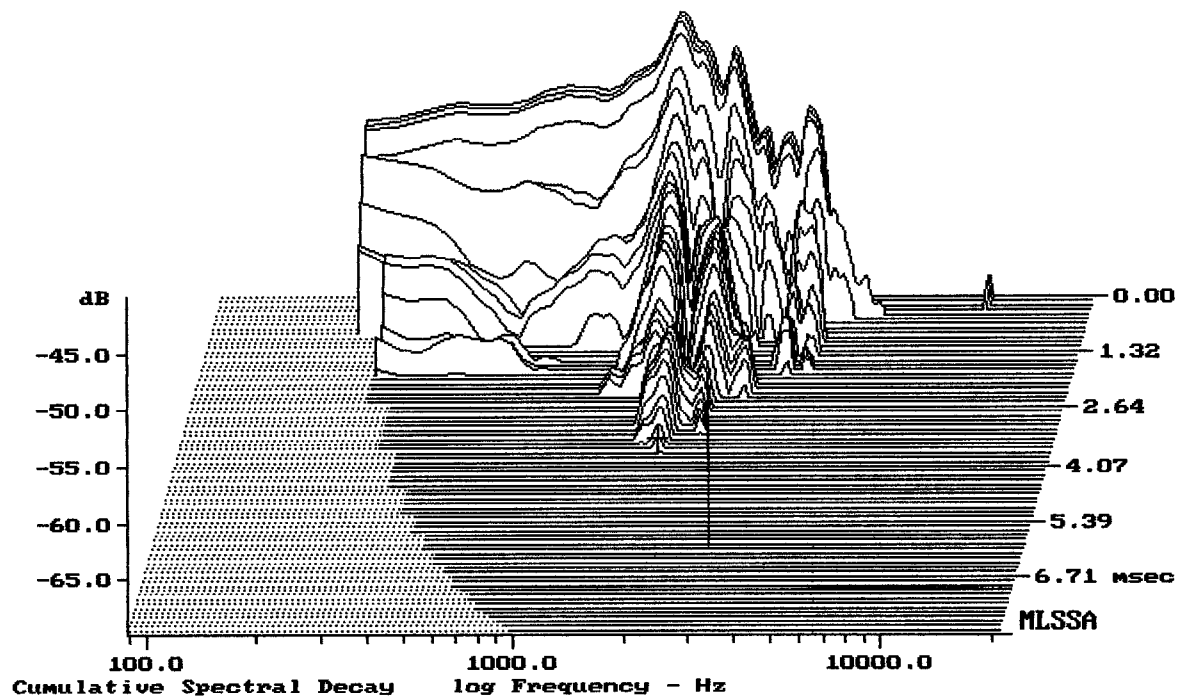

-69.05 dB, 1776 Hz (40), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.27	Ohms
2	Fs	33.59	Hz
3	Re	3.12	Ohms[dc]
4	Res	70.21	Ohms
5	Qms	11.79	
6	Qes	0.52	
7	Qts	0.50	
8	L1	0.59	mH
9	L2	0.79	mH
10	R2	3.25	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	135.66	liters
13	Mms	60.63	grams
14	Cms	370	$\mu\text{M}/\text{Newton}$
15	B1	8.73	Tesla-M
16	SPLref(Sd)	91.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.2% (-20% to -50% is recommended).

12W2A ONIX

MLSSA: Parameters

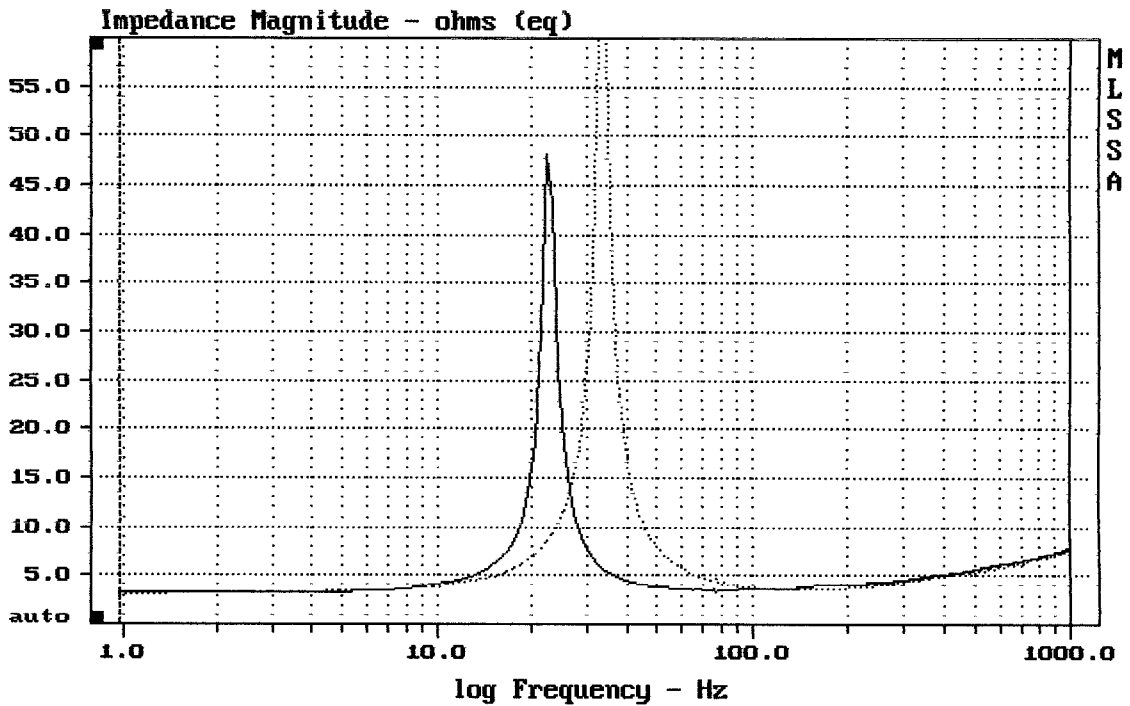

mean: 5.964, rms: 7.316, std: 4.237, max: 69.61, min: 3.183

4-8-91 4:39 PM

MLSSA: Frequency Domain