


Level (100:2500 Hz) = 92.32 dB SPL/watt (4 ohms, @1.00 meters)

12W2A PRATA 4ohm

MLSSA: Frequency Domain

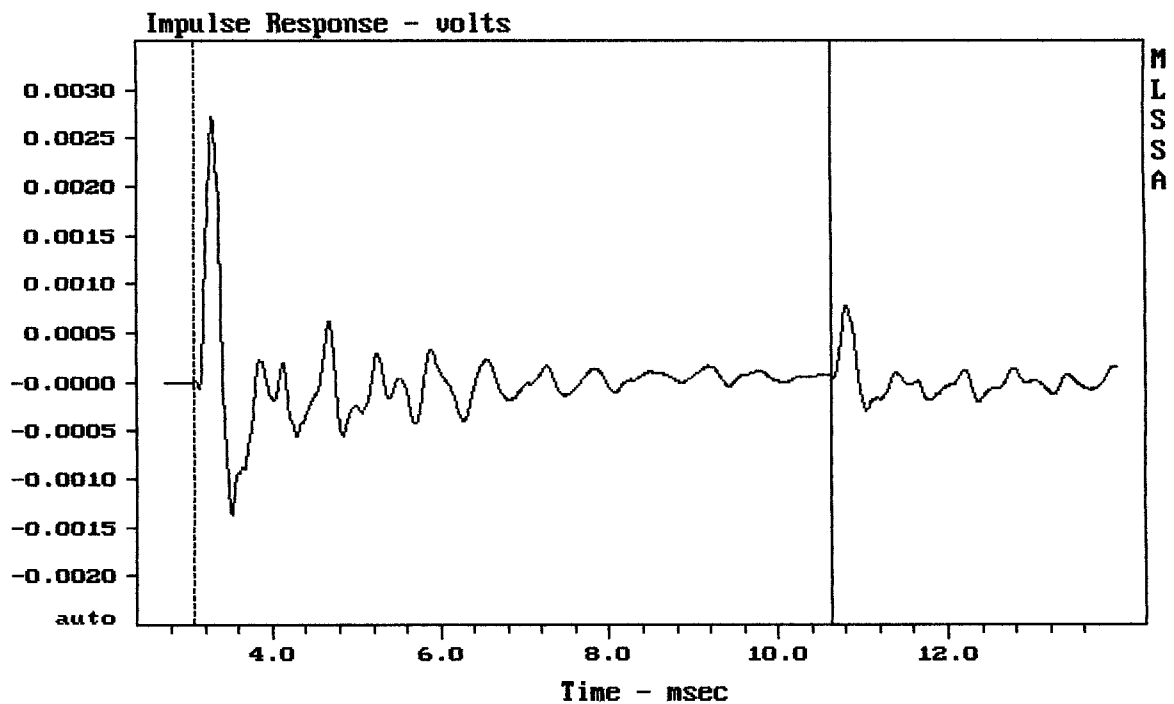

mean: 2.588e-006, rms: 0.0004284, std: 0.0004284, max: 0.002726, min: -0.001377

12W2A PRATA 4ohm

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	31.48	Hz
3	Re	3.22	Ohms[dc]
4	Res	66.58	Ohms
5	Qms	9.74	
6	Qes	0.47	
7	Qts	0.45	
8	L1	0.55	mH
9	L2	0.76	mH
10	R2	3.58	Ohms
11	RMSE-load	0.36	Ohms
12	Vas(Sd)	157.14	liters
13	Mms	59.59	grams
14	Cms	429	$\mu\text{M}/\text{Newton}$
15	B1	8.97	Tesla-M
16	SPLref(Sd)	92.0	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.7% (-20% to -50% is recommended).

12W2A PRATA

MLSSA: Parameters

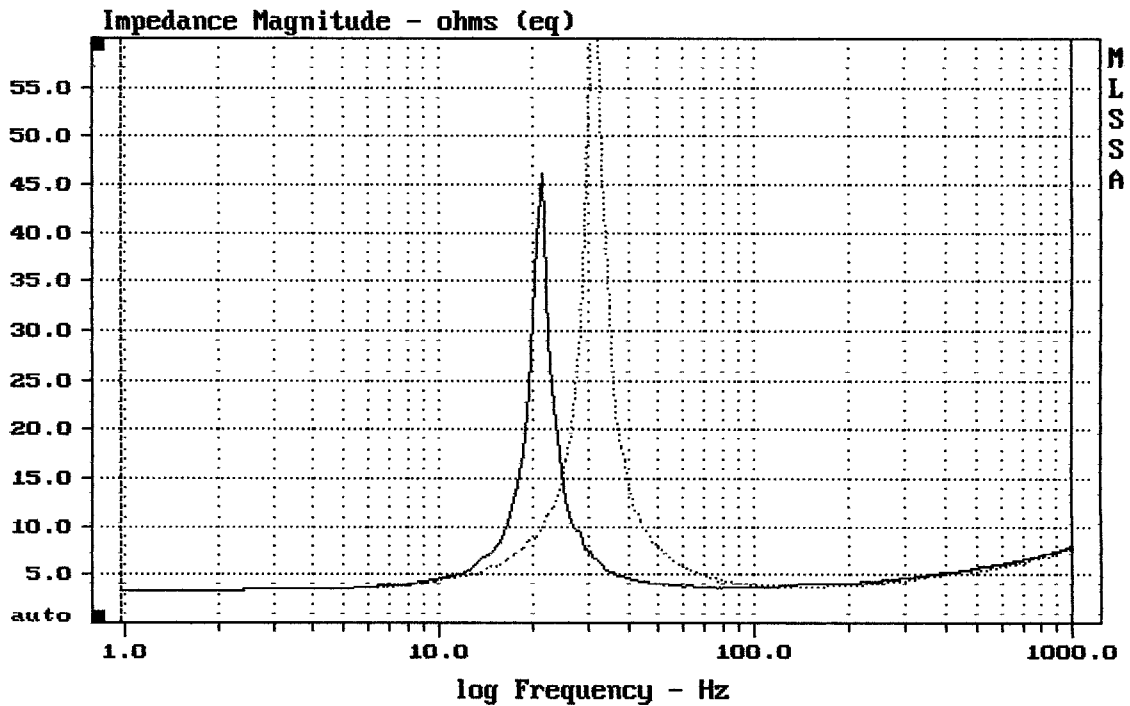

mean: 6.049, rms: 7.398, std: 4.259, max: 70.5, min: 3.341

MLSSA: Frequency Domain