

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC LIMITS

Line	Parameter	Value	Units
1	RMSE-free	0.50	Ohms
2	Fs	42.99	Hz
3	Re	5.20	Ohms[dc]
4	Res	46.45	Ohms
5	Qms	3.97	
6	Qes	0.44	
7	Qts	0.40	
8	L1	0.45	mH
9	L2	1.41	mH
10	R2	2.72	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	169.79	liters
13	Mms	82.94	grams
14	Cms	165	$\mu\text{M}/\text{Newton}$
15	B1	16.19	Tesla-M
16	SPLref(Sd)	96.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.9% (-20% to -50% is recommended).

15HPL76


MLSSA: Parameters

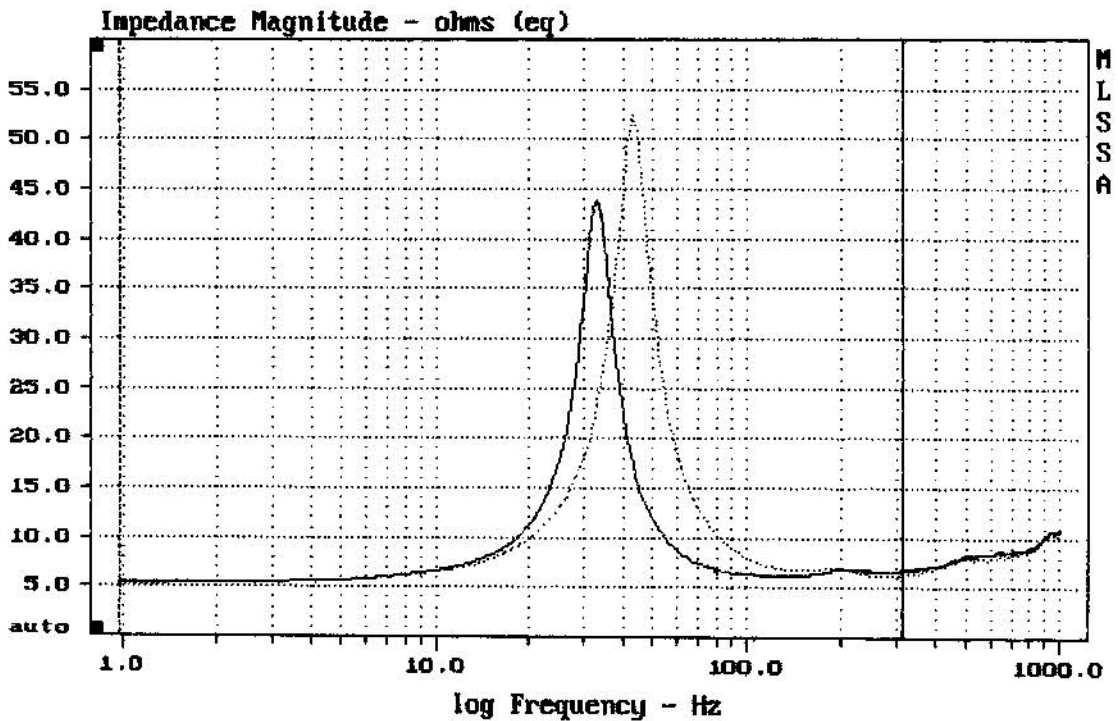

CURSOR: dy = -0.443202 x = 313.4766 (321)

B&C 15HPL76


MLSSA: Frequency Domain

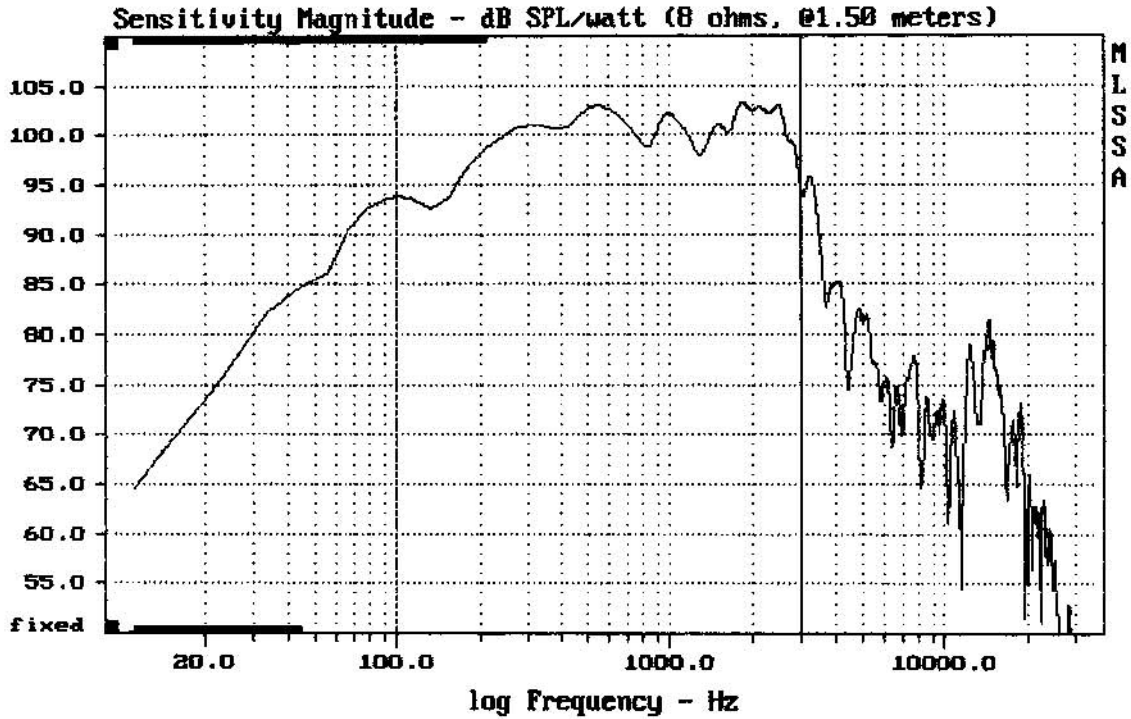

Level (100:2996 Hz) = 100.31 dB SPL/watt (8 ohms, @1.50 meters)

B&C 15HPL76

MLSSA: Frequency Domain

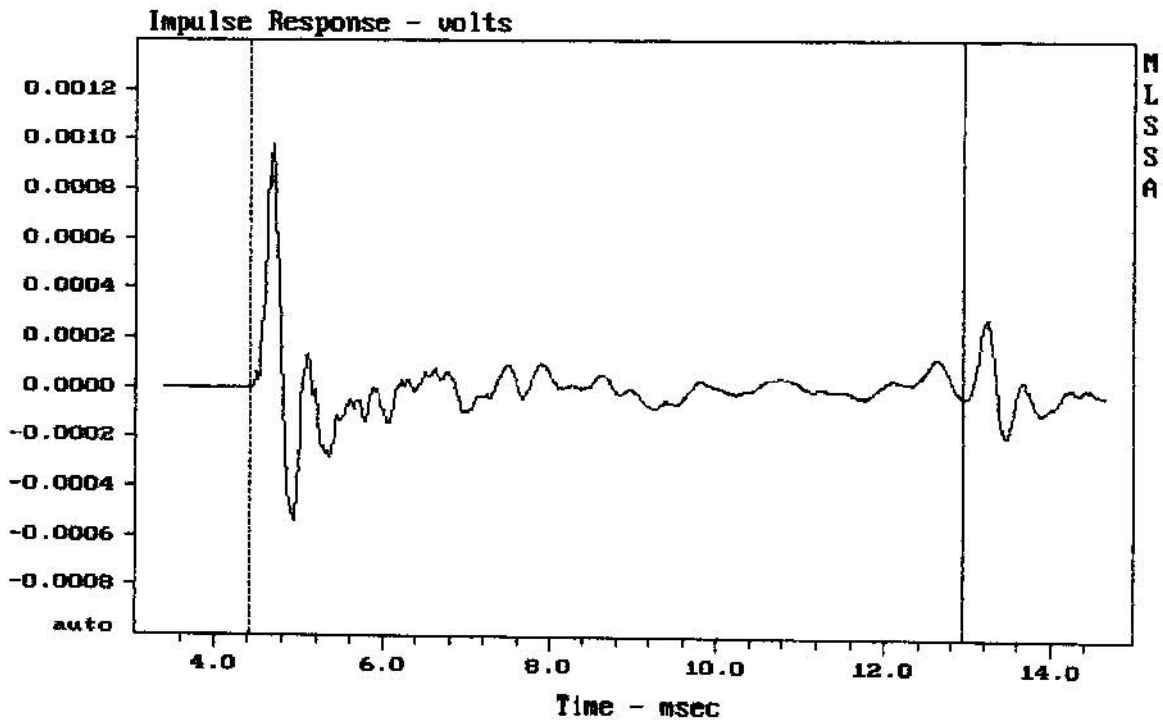

CURSOR: y = -3.32954e-005 x = 12.9360 (1176)

B&C 15HPL76