

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	40.02	Hz
3	Re	5.95	Ohms[dc]
4	Res	67.12	Ohms
5	Qms	4.98	
6	Qes	0.44	
7	Qts	0.41	
8	L1	1.03	mH
9	L2	1.41	mH
10	R2	5.90	Ohms
11	RMSE-load	0.42	Ohms
12	Vas(Sd)	162.73	liters
13	Mms	99.84	grams
14	Cms	158	$\mu\text{M}/\text{Newton}$
15	B1	18.39	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.6% (-20% to -50% is recommended).

B&C 15HPL76W


MLSSA: Parameters

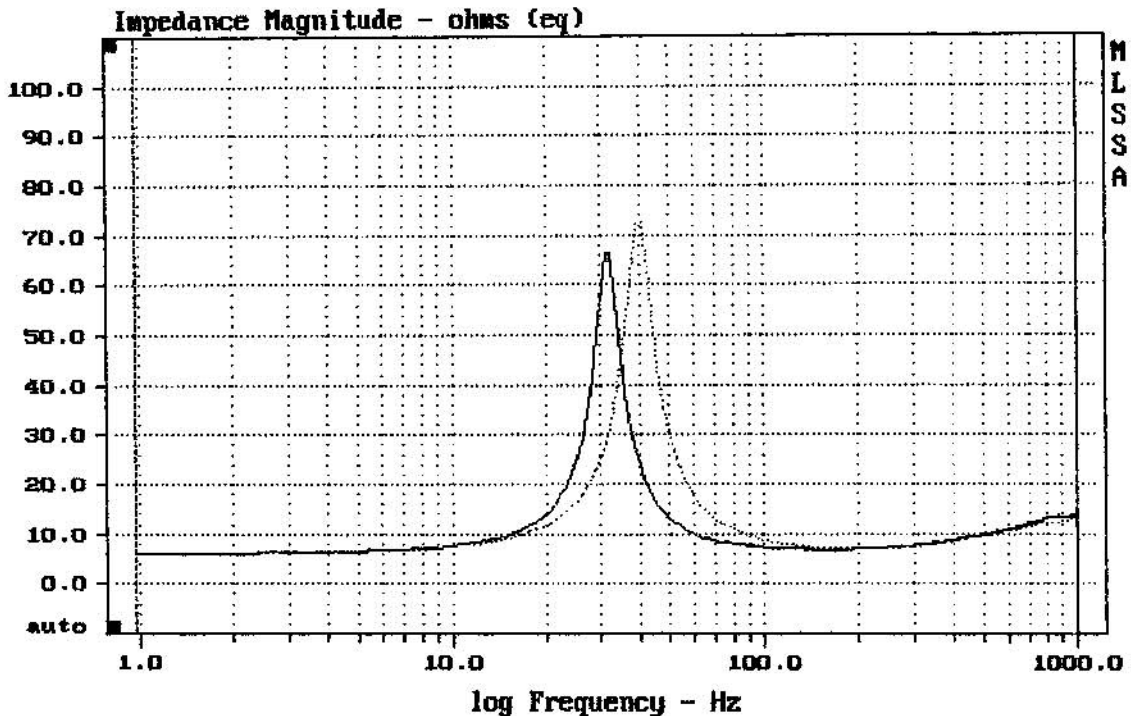

CURSOR: dy = -0.364378 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

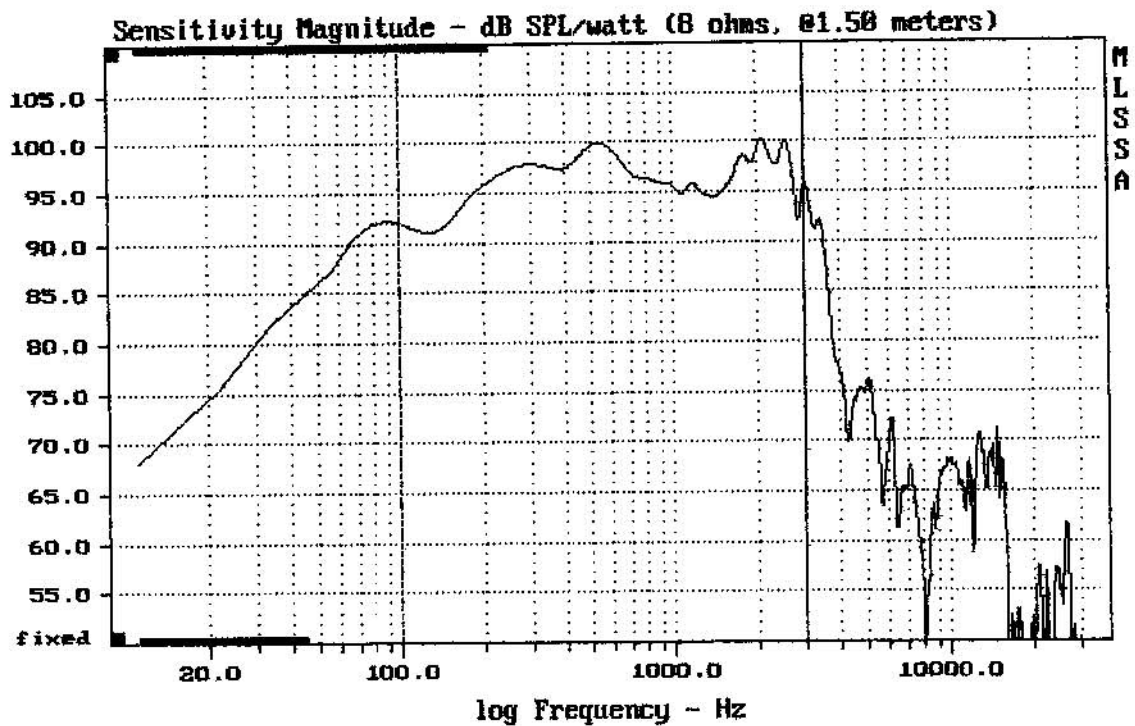

Level (100:2996 Hz) = 96.81 dB SPL/watt (8 ohms, @1.50 meters)

B&C 15HPL76W

MLSSA: Frequency Domain

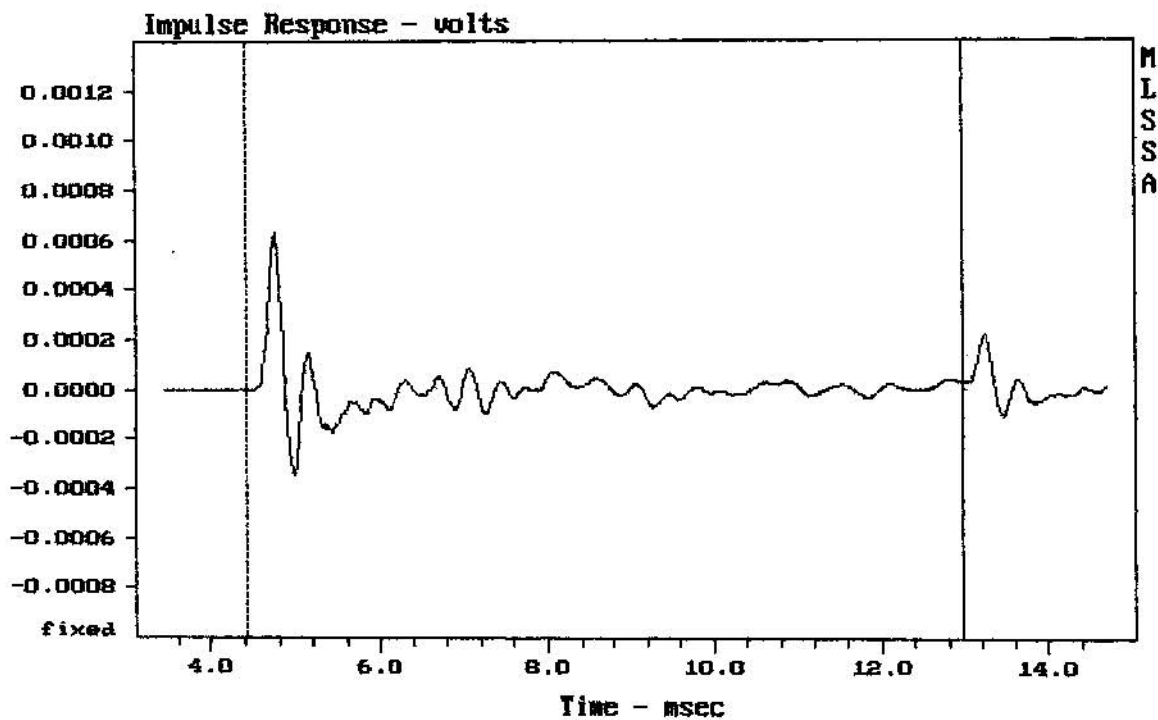

CURSOR: $y = 3.83e-005$ $x = 12.9698$ (1179)

B&C 15HPL76W