

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	1.00	Ohms
2	Fs	53.38	Hz
3	Re	5.33	Ohms[dc]
4	Res	63.22	Ohms
5	Qms	4.12	
6	Qes	0.35	
7	Qts	0.32	
8	L1	0.48	mH
9	L2	1.65	mH
10	R2	4.06	Ohms
11	RMSE-load	0.55	Ohms
12	Vas(Sd)	170.18	liters
13	Mms	50.50	grams
14	Cms	176	$\mu\text{M}/\text{Newton}$
15	B1	16.12	Tesla-M
16	SPLref(Sd)	100.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (60.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.1% (-20% to -50% is recommended).


L5PE40

MLSSA: Parameters

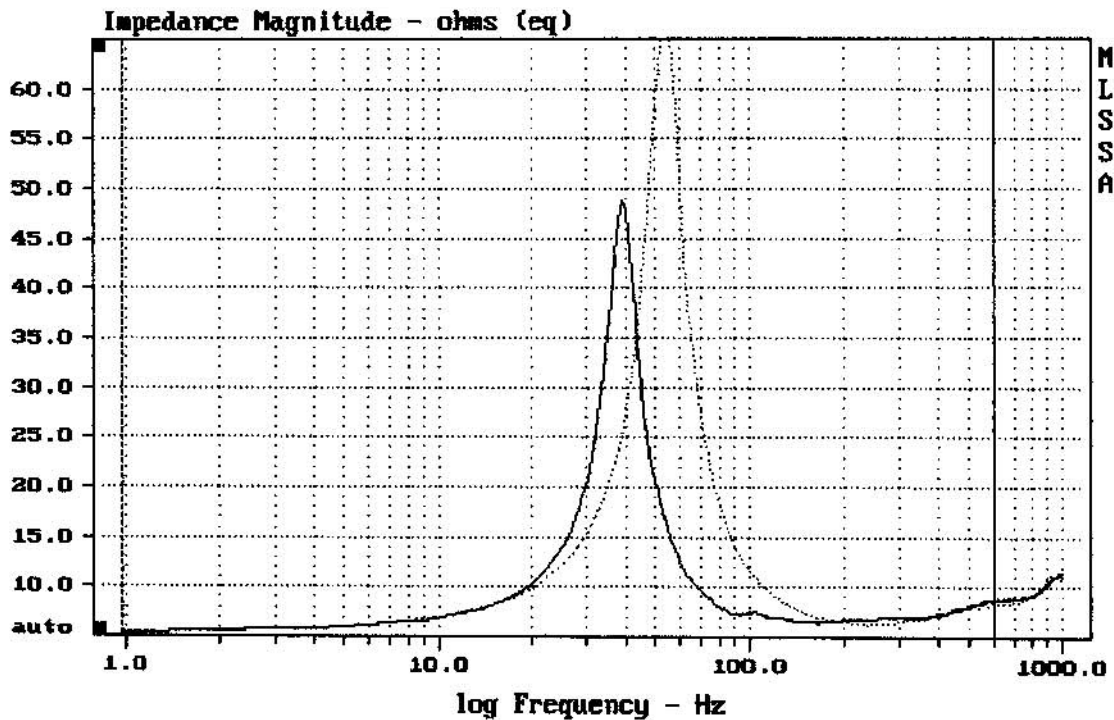

CURSOR: dy = -0.396469 x = 604.4922 (619)


MLSSA: Frequency Domain

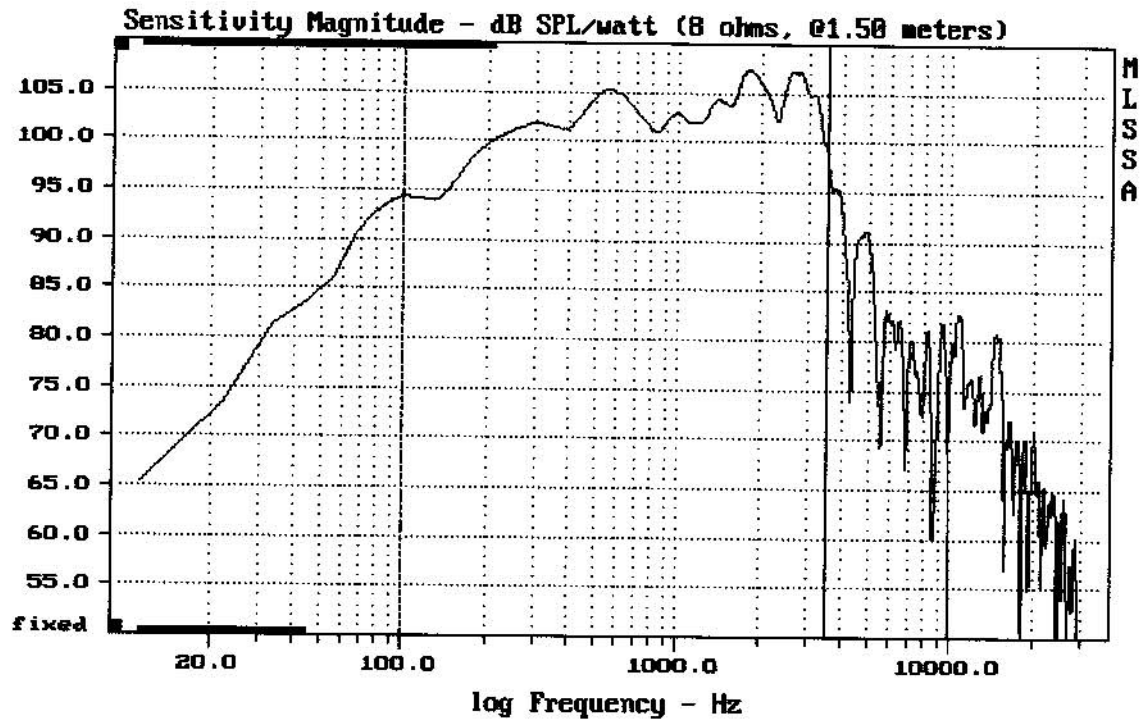

Level (100:3496 Hz) = 102.91 dB SPL/watt (8 ohms, @1.50 meters)

15PE48

MLSSA: Frequency Domain

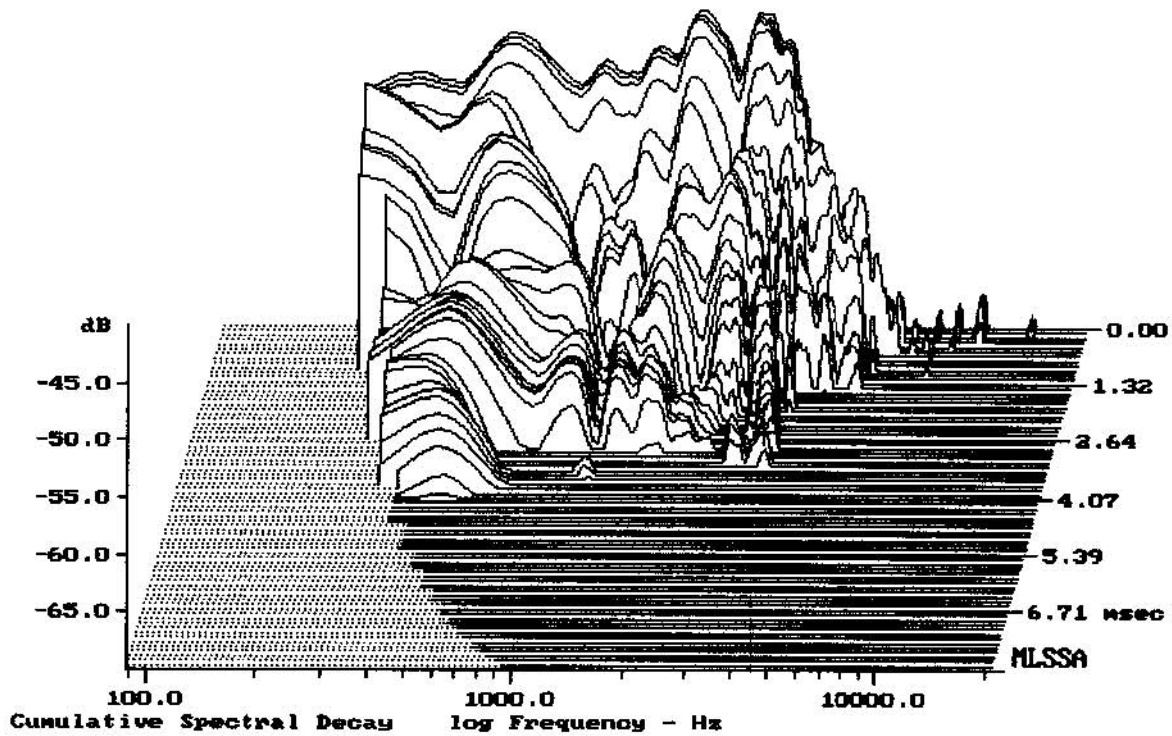

-67.38 dB, 3374 Hz (76), 3.198 msec (30)