


Level (100:4006 Hz) = 96.31 dB SPL/watt (8 ohms, @1.50 meters)

15PW8

MLSSA: Frequency Domain

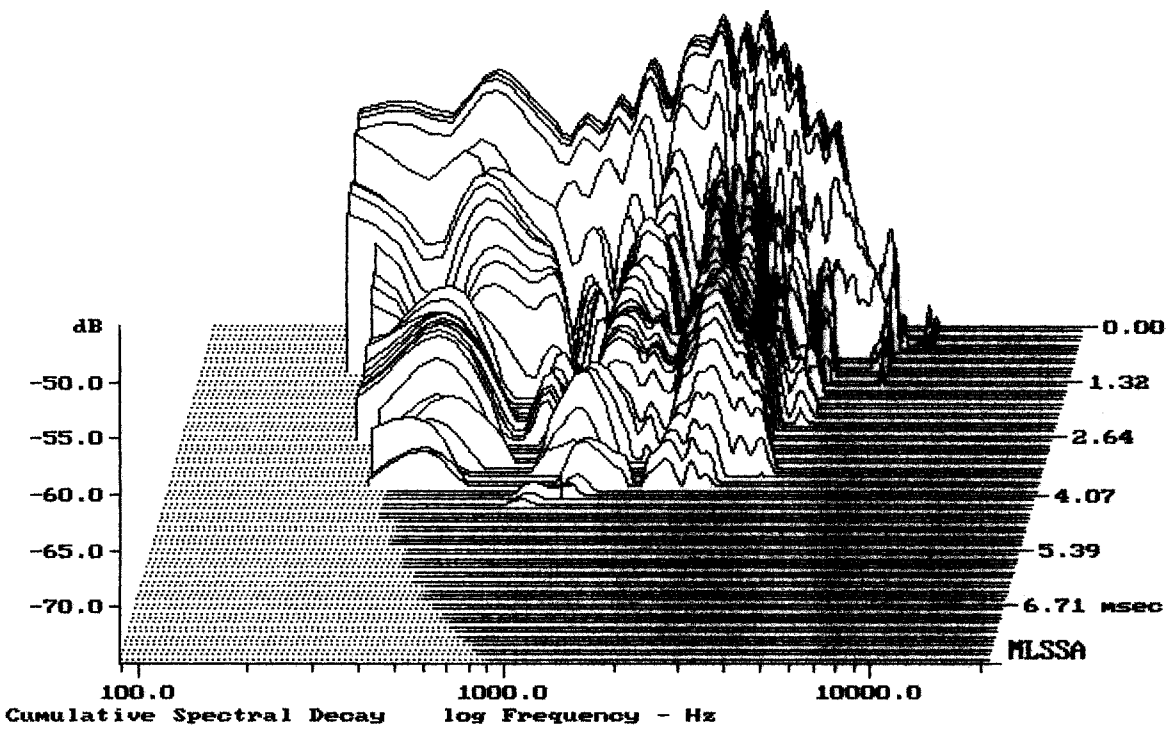

-74.07 dB, 1065 Hz (24), 4.870 msec (30)

DTTO

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	0.34	Ohms	
2	Fs	50.70	Hz	
3	Re	5.66	Ohms[dc]	
4	Res	50.93	Ohms	
5	Qms	10.04		
6	Qes	1.12		
7	Qts	1.00		
8	L1	0.82	mH	
9	L2	0.88	mH	
10	R2	3.66	Ohms	
11	RMSE-load	0.19	Ohms	
12	Vas(Sd)	134.35	liters	
13	Mms	75.35	grams	
14	Cms	131	$\mu\text{M}/\text{Newton}$	
15	B1	11.04	Tesla-M	
16	SPLref(Sd)	93.8	dB[Re]	
17	Rub-index	0.00		

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.5% (-20% to -50% is recommended).

15PW8

MLSSA: Parameters

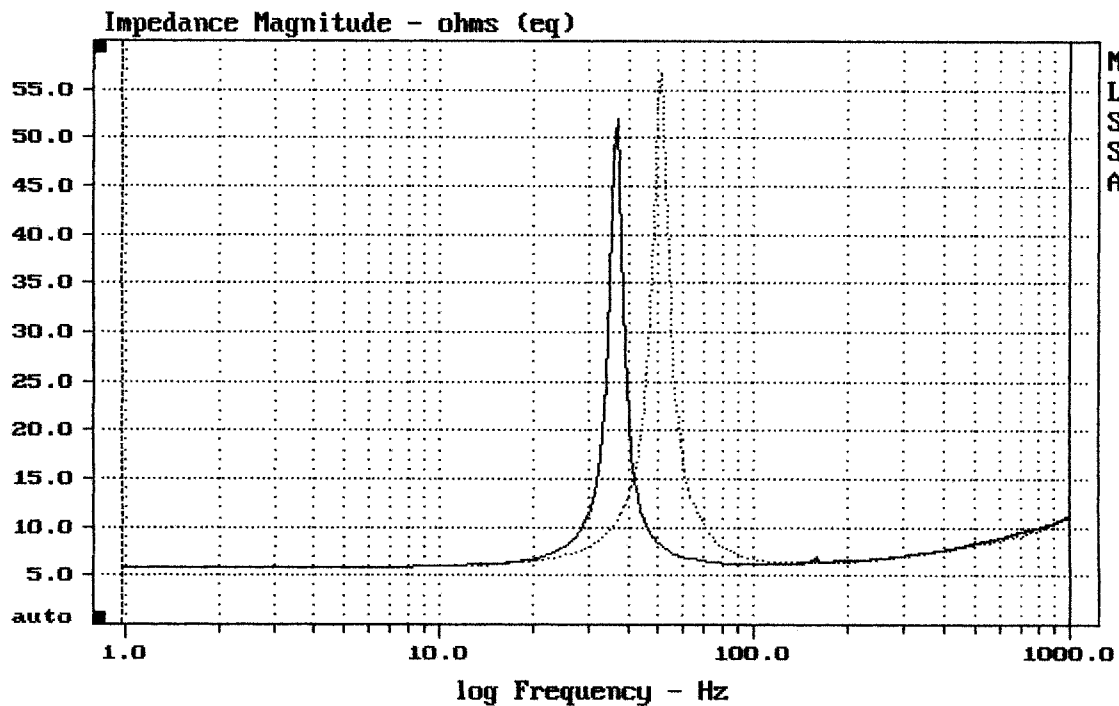

mean: 8.859, rms: 9.679, std: 3.899, max: 56.67, min: 5.76

MLSSA: Frequency Domain