


Level (100:2608 Hz) = 95.83 dB SPL/watt (8 ohms, @1.50 meters)

15RBX100

MLSSA: Frequency Domain

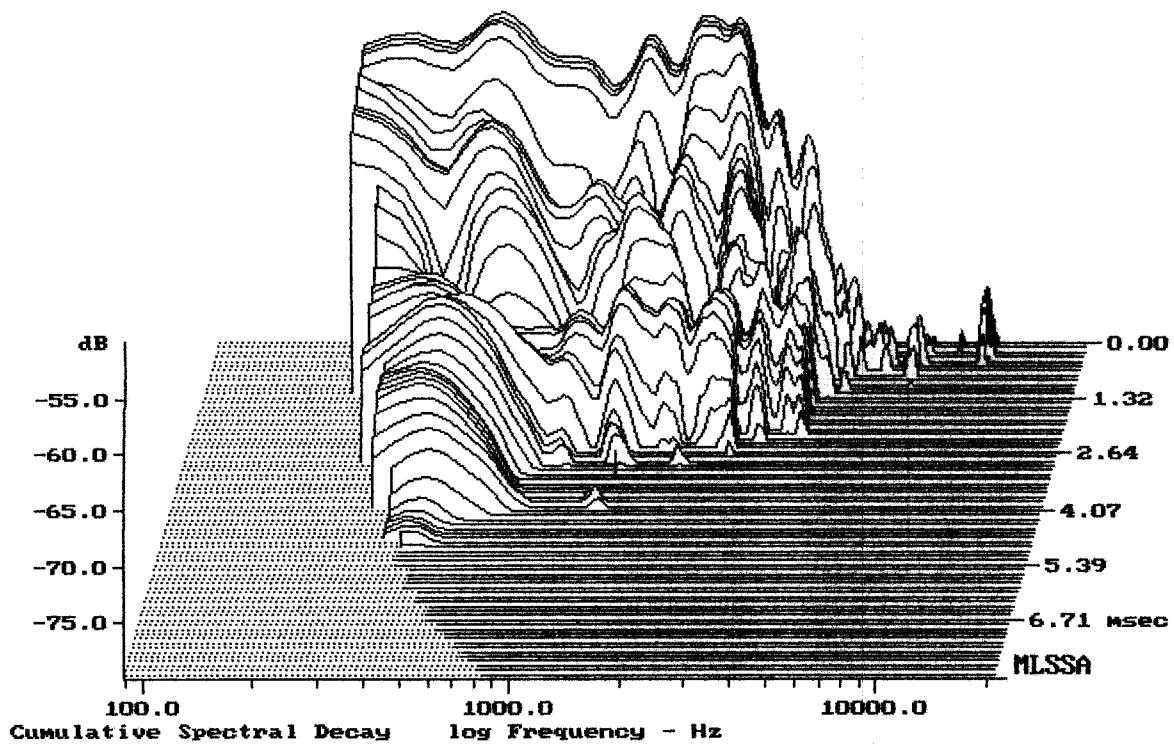

-79.81 dB, 1332 Hz (30), 2.970 msec (28)

DTTO

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	51.76	Hz
3	Re	5.05	Ohms[dc]
4	Res	81.47	Ohms
5	Qms	6.93	
6	Qes	0.43	
7	Qts	0.40	
8	L1	1.12	mH
9	L2	1.70	mH
10	R2	4.69	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	80.76	liters
13	Mms	127.73	grams
14	Cms	74	$\mu\text{M}/\text{Newton}$
15	B1	22.09	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (120.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.16 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.8% (-20% to -50% is recommended).

15RBX100

MLSSA: Parameters

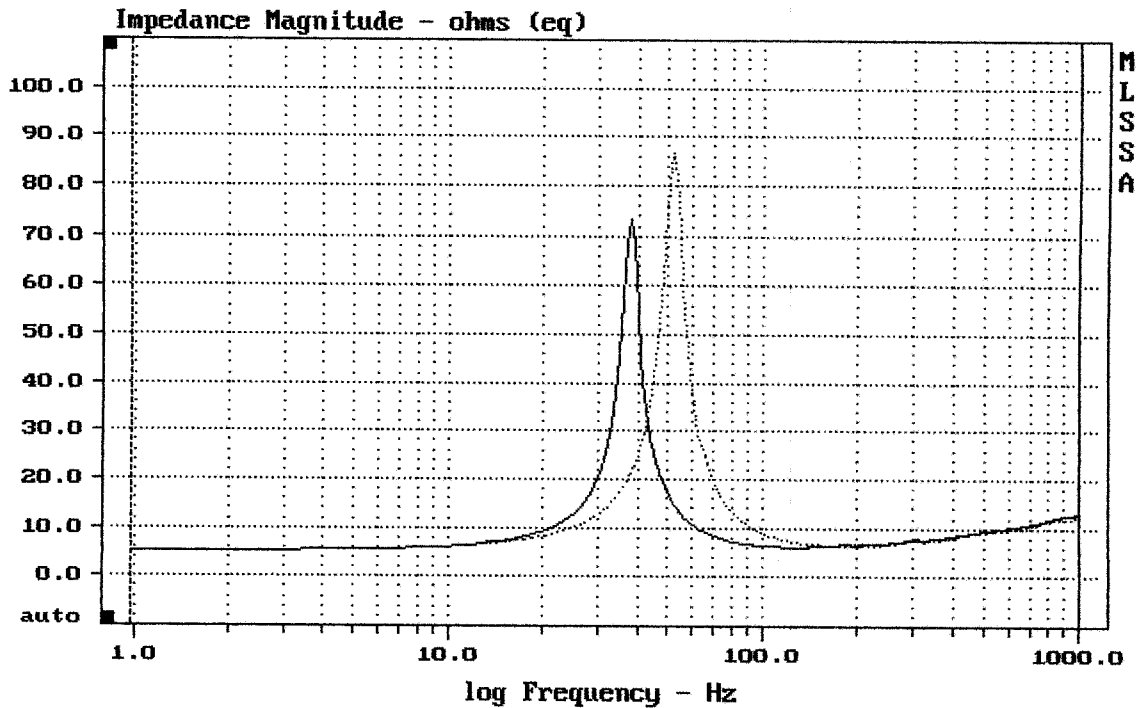

mean: 10.55, rms: 12.9, std: 7.415, max: 86.54, min: 5.194

MLSSA: Frequency Domain