

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.60	Ohms
2	Fs	34.95	Hz
3	Re	5.00	Ohms[dc]
4	Res	98.78	Ohms
5	Qms	6.09	
6	Qes	0.31	
7	Qts	0.29	
8	L1	1.30	mH
9	L2	1.54	mH
10	R2	7.43	Ohms
11	RMSE-load	0.54	Ohms
12	Vas(Sd)	137.58	liters
13	Mms	154.73	grams
14	Cms	134	$\mu\text{M}/\text{Newton}$
15	B1	23.48	Tesla-M
16	SPLref(Sd)	94.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (100.00 grams)

Area (Sd): 855.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.4% (-20% to -50% is recommended).


15TBX100

MLSSA: Parameters

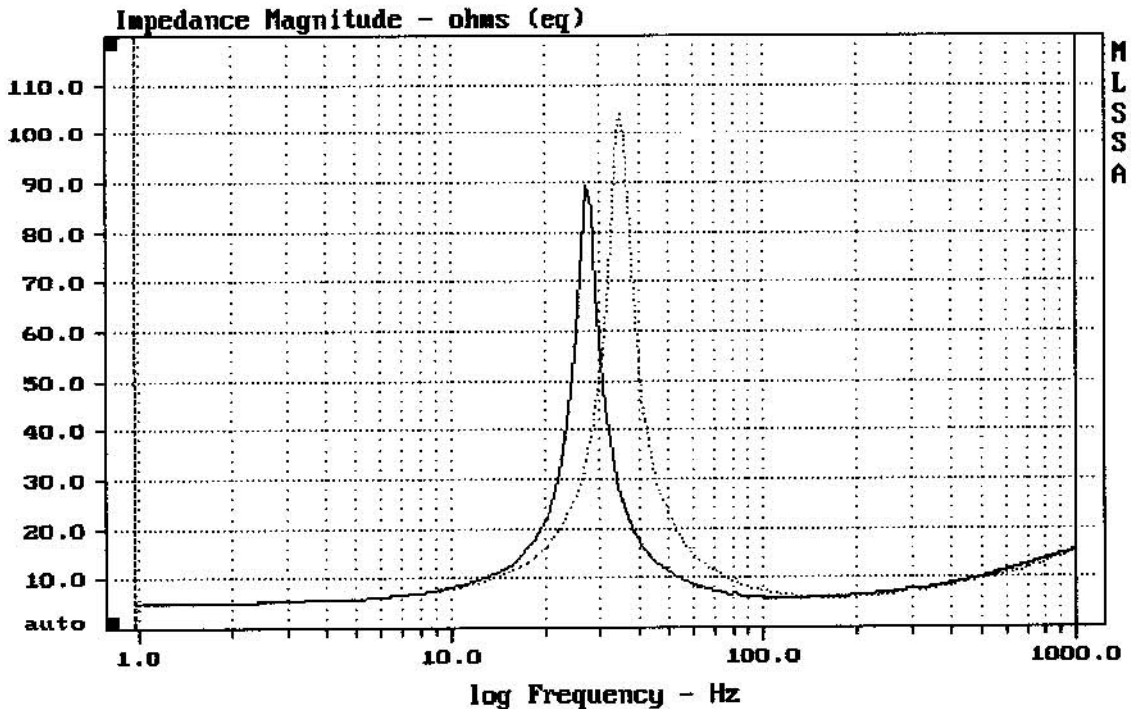

mean: 11.39, rms: 14.04, std: 8.204, max: 103.9, min: 5.067


MLSSA: Frequency Domain

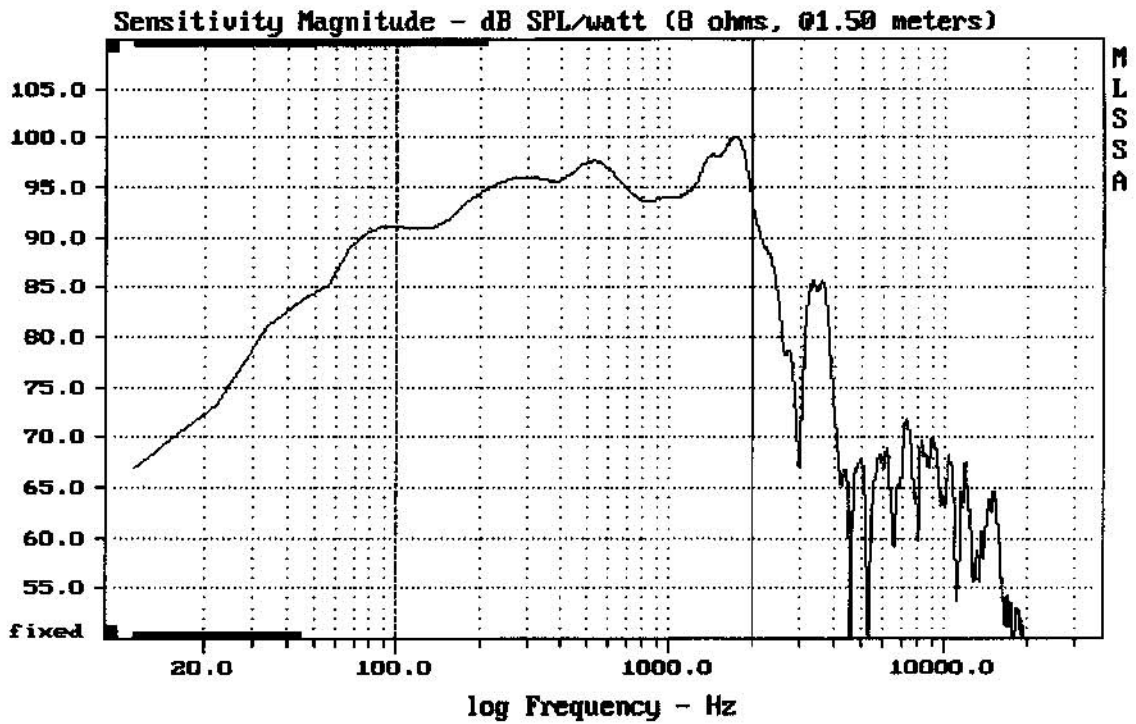

Level (100:1998 Hz) = 95.57 dB SPL/watt (8 ohms, @1.50 meters)

15TBX100

MLSSA: Frequency Domain

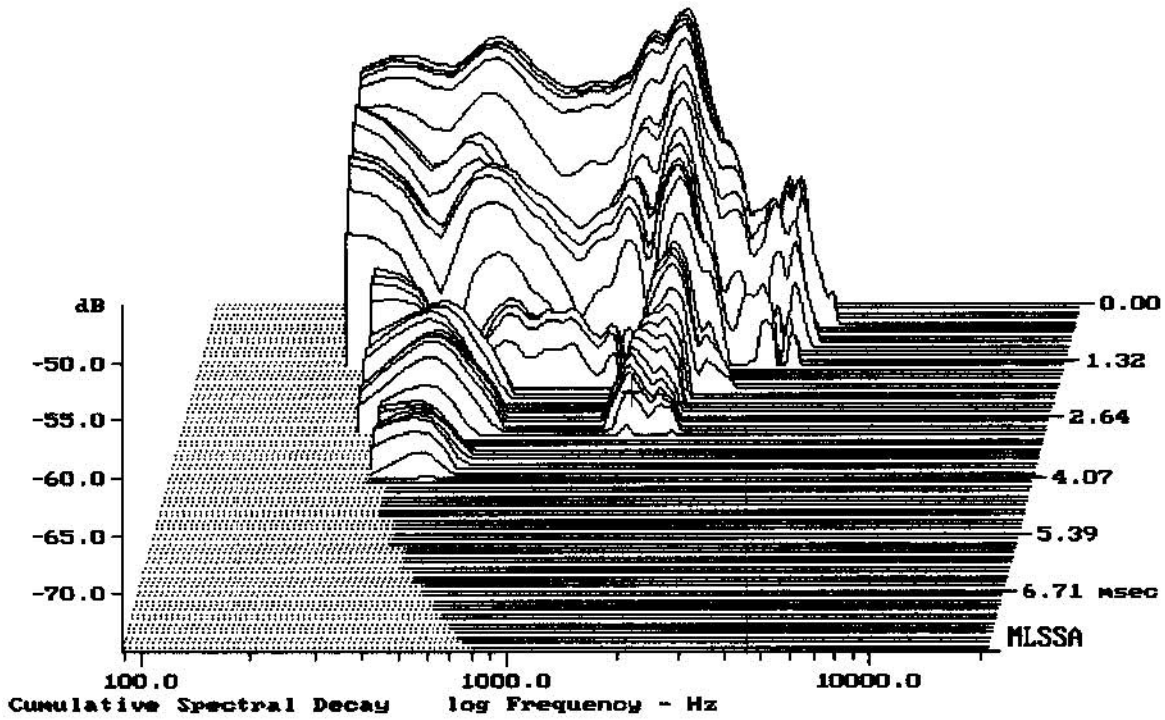

-71.66 dB, 1589 Hz (34), 2.970 msec (28)