


CURSOR: $dy = 0.000105256$ $x = 13.0240$ (1184)


15CXN76

MLSSA: Time Domain

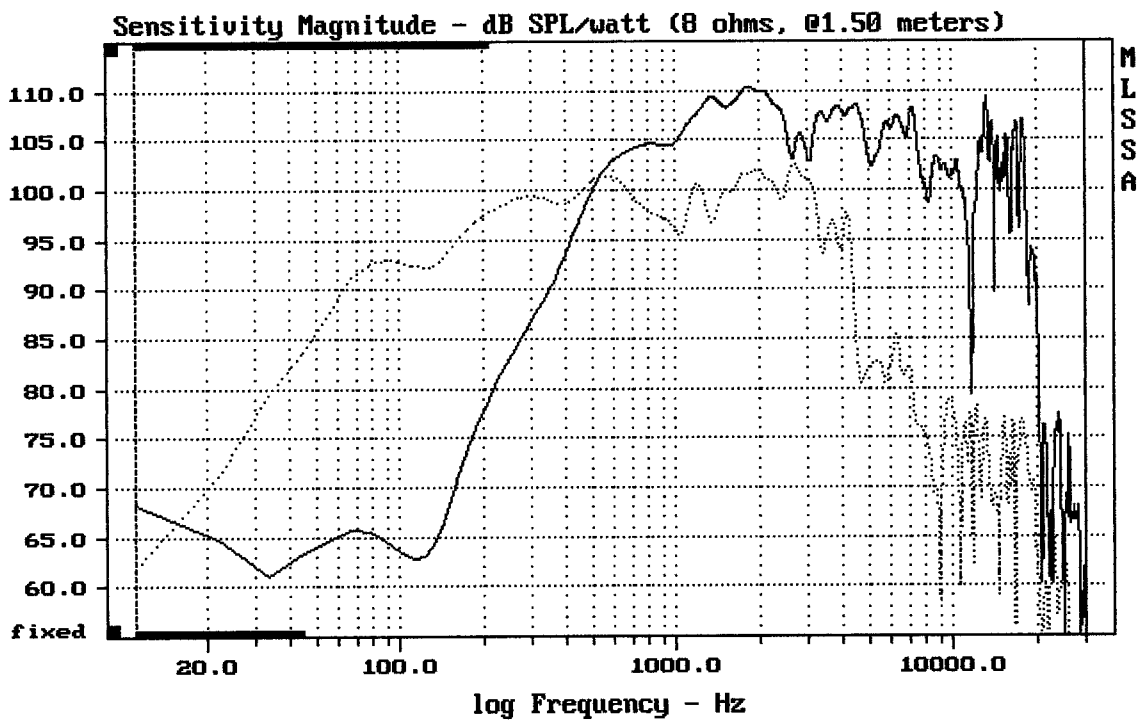

CURSOR: $dy = -25.5597$ $x = 30007.1014$ (2704)


15CXN76

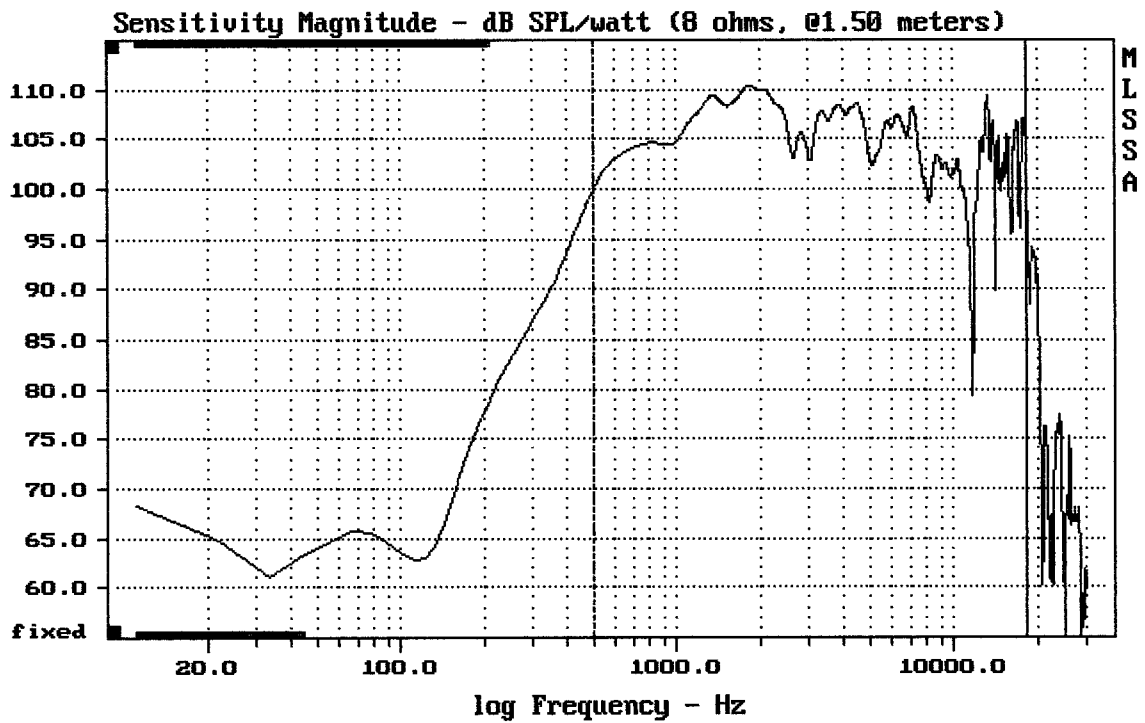


Level (499:18211 Hz) = 106.21 dB SPL/watt (8 ohms, @1.50 meters)

15CXN76

MLSSA: Frequency Domain

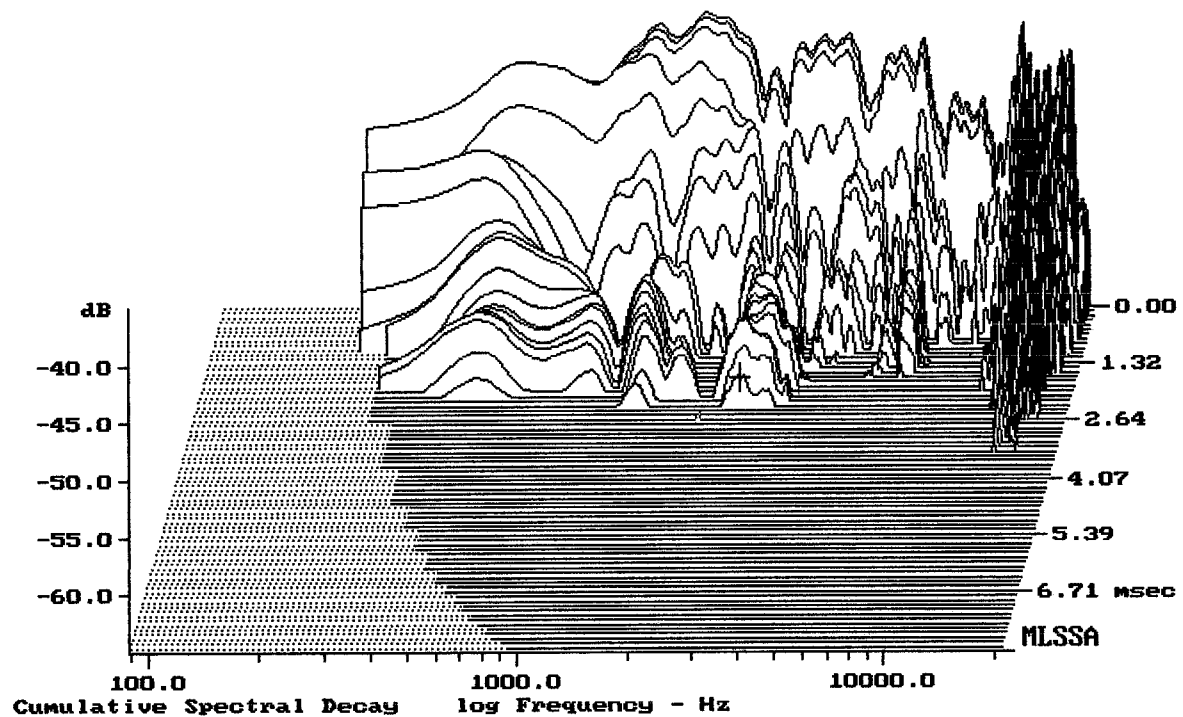


-62.47 dB, 2663 Hz (60), 2.310 msec (22)

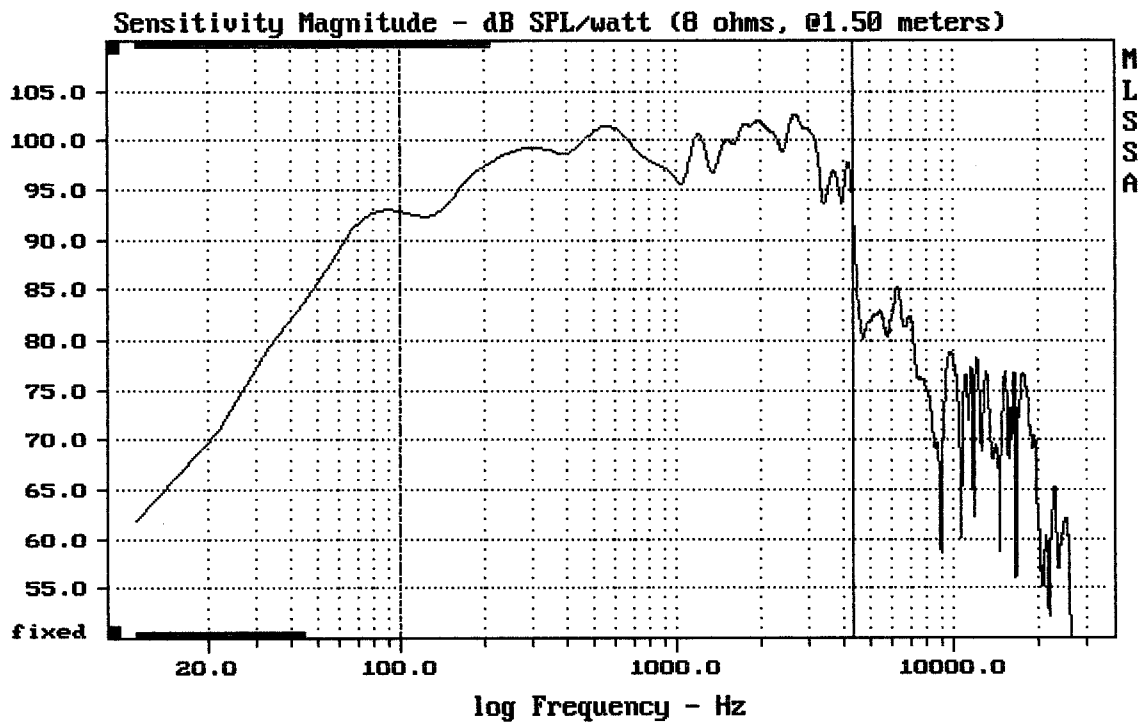

Level (100:4350 Hz) = 98.85 dB SPL/watt (8 ohms, @1.50 meters)

15CXN76

MLSSA: Frequency Domain

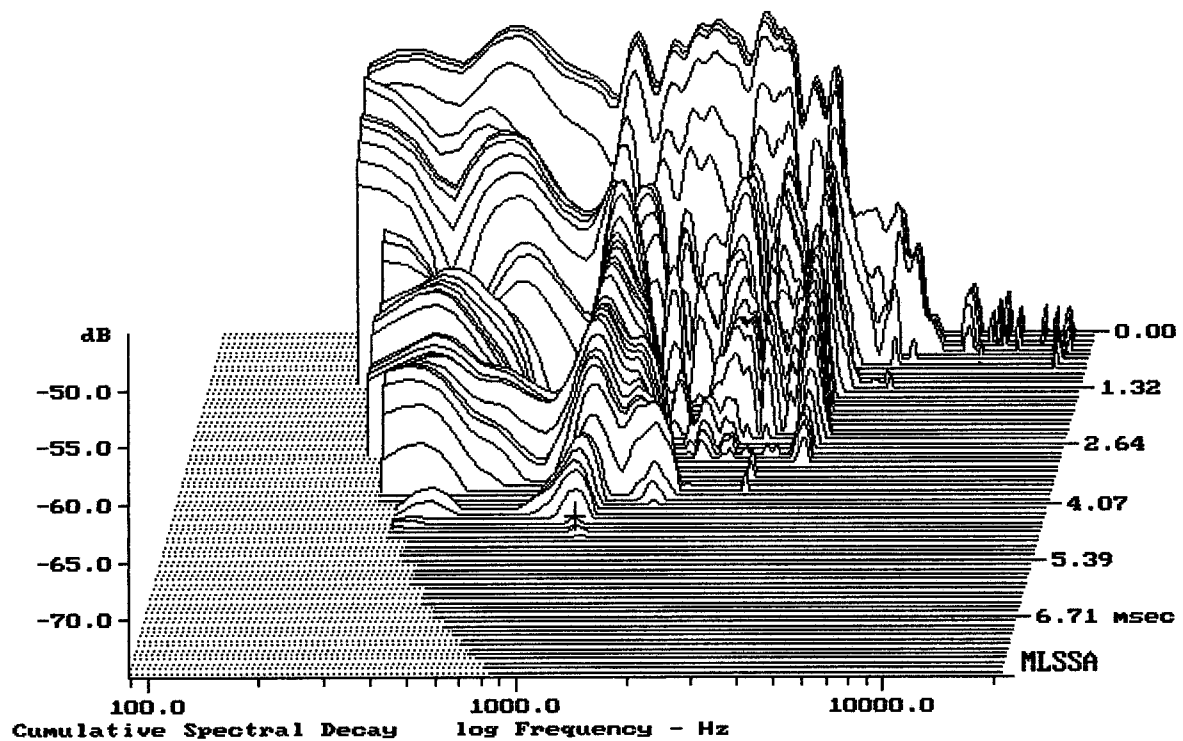

-74.44 dB, 1110 Hz (25), 4.510 msec (42)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.41	Ohms
2	Fs	40.89	Hz
3	Re	5.29	Ohms[dc]
4	Res	168.87	Ohms
5	Qms	10.83	
6	Qes	0.34	
7	Qts	0.33	
8	L1	0.61	mH
9	L2	1.14	mH
10	R2	3.06	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	215.37	liters
13	Mms	76.77	grams
14	Cms	197	$\mu\text{M}/\text{Newton}$
15	B1	17.53	Tesla-M
16	SPLref(Sd)	98.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.5% (-20% to -50% is recommended).

15CXN76

MLSSA: Parameters

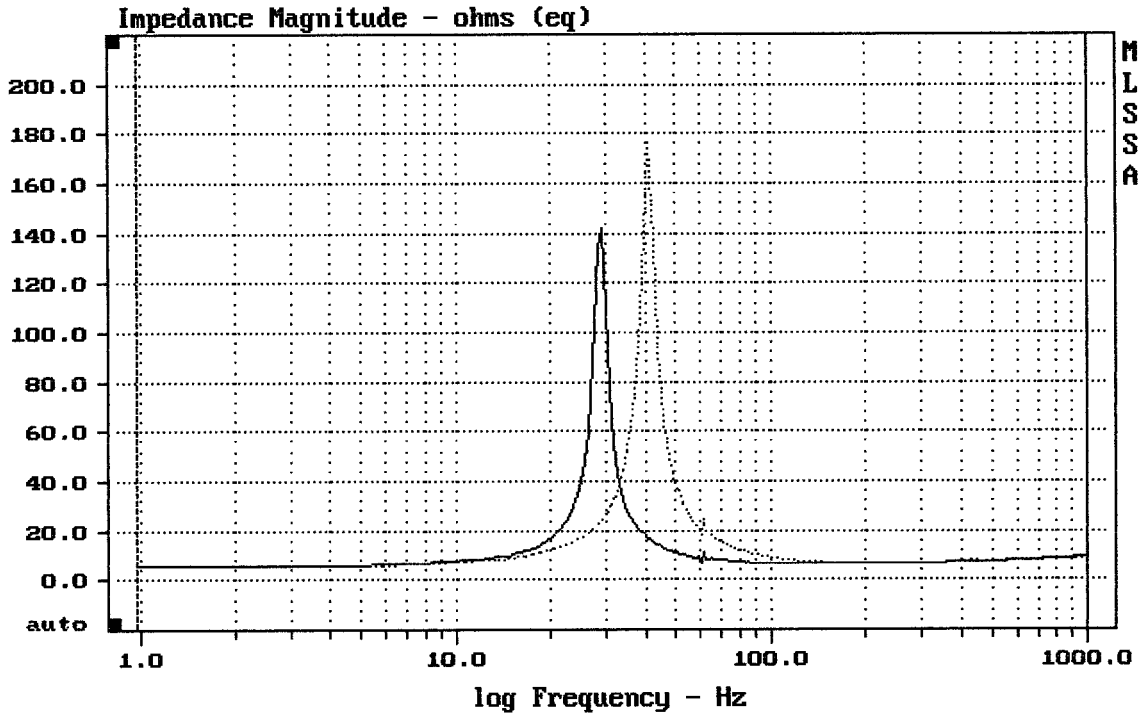

mean: 9.645, rms: 15.23, std: 11.79, max: 176.4, min: 5.44

MLSSA: Frequency Domain