


Level (100:3507 Hz) = 97.15 dB SPL/watt (4 ohms, @1.50 meters)

SELENIUM 15PW5 - 4ohm

MLSSA: Frequency Domain

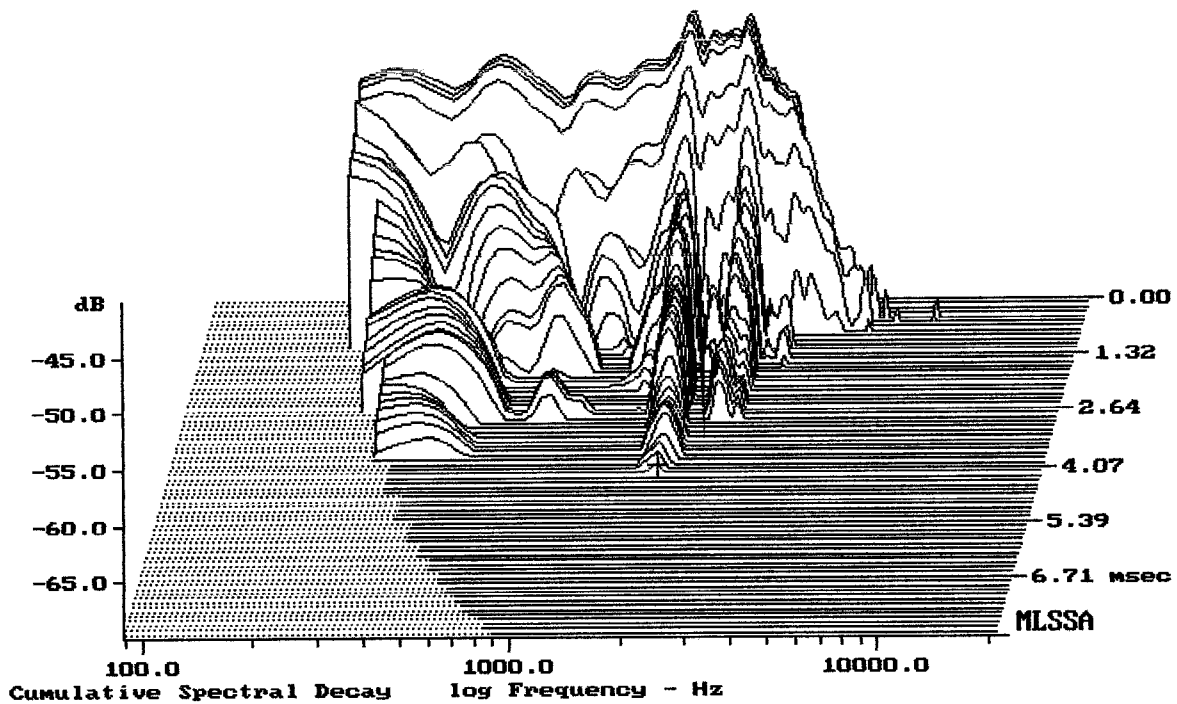

-69.22 dB, 1909 Hz (43), 4.180 msec (39)

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.73	Ohms
2	Fs	42.81	Hz
3	Re	3.13	Ohms[dc]
4	Res	127.39	Ohms
5	Qms	14.81	
6	Qes	0.36	
7	Qts	0.36	
8	L1	0.55	mH
9	L2	0.81	mH
10	R2	4.28	Ohms
11	RMSE-load	0.62	Ohms
12	Vas(Sd)	179.27	liters
13	Mms	74.53	grams
14	Cms	185	$\mu\text{M}/\text{Newton}$
15	B1	13.13	Tesla-M
16	SPLref(Sd)	97.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.7% (-20% to -50% is recommended).

15PW5 4ohm

MLSSA: Parameters

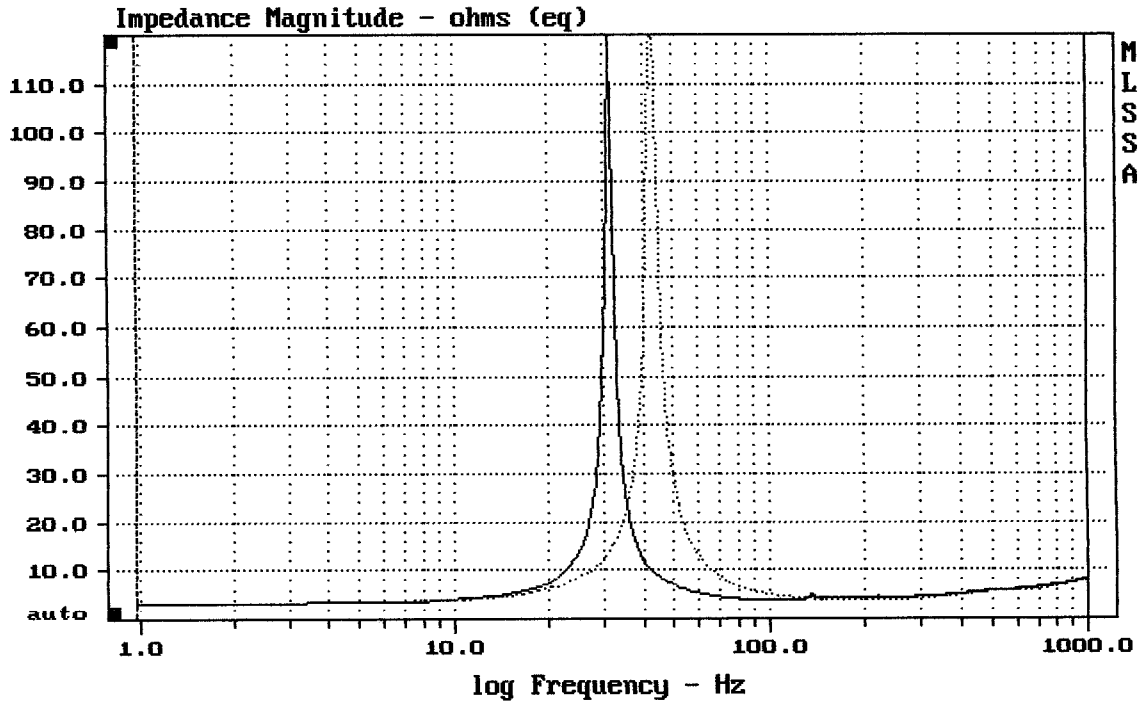

mean: 6.725, rms: 10.37, std: 7.896, max: 124.9, min: 3.212

MLSSA: Frequency Domain