

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.58	Ohms
2	Fs	37.59	Hz
3	Re	5.46	Ohms[dc]
4	Res	245.39	Ohms
5	Qms	17.96	
6	Qes	0.40	
7	Qts	0.39	
8	L1	0.67	mH
9	L2	1.34	mH
10	R2	7.33	Ohms
11	RMSE-load	0.63	Ohms
12	Vas(Sd)	212.91	liters
13	Mms	86.52	grams
14	Cms	207	$\mu\text{M}/\text{Newton}$
15	B1	16.71	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.2% (-20% to -50% is recommended).


SELENIUM 15PW5

MLSSA: Parameters

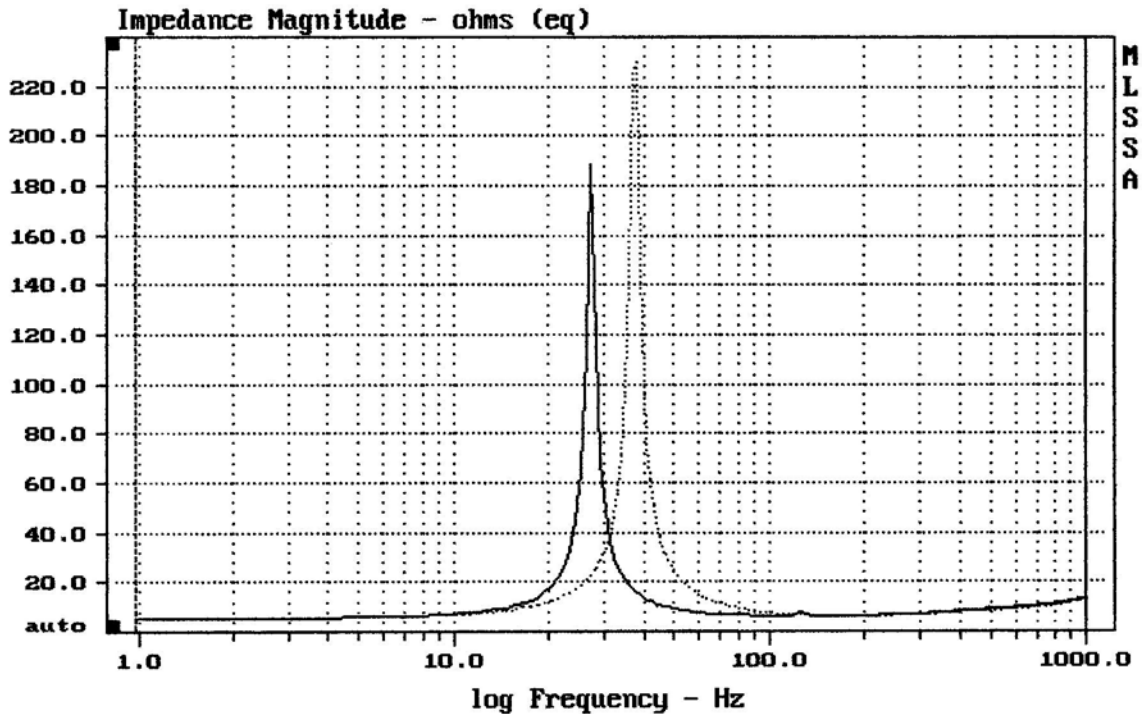

CURSOR: dy = -1.03786 x = 1000.9766 (1025)


MLSSA: Frequency Domain

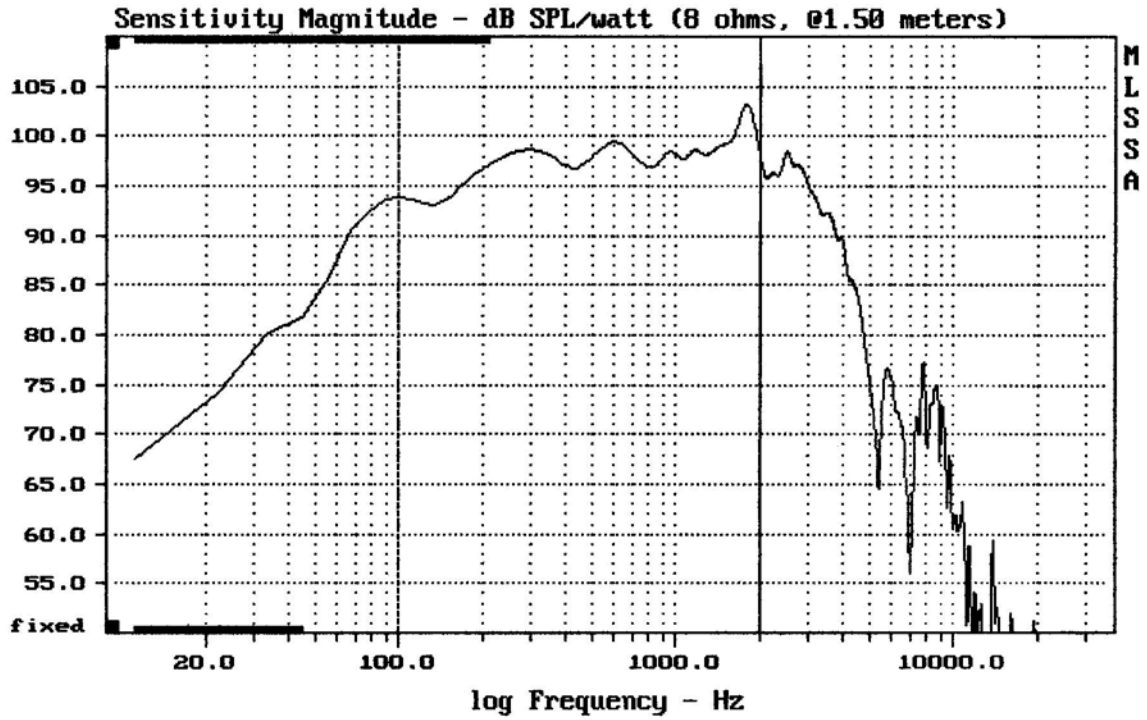

Level (100:2009 Hz) = 97.94 dB SPL/watt (8 ohms, @1.50 meters)

SELENIUM 15PW5

MLSSA: Frequency Domain

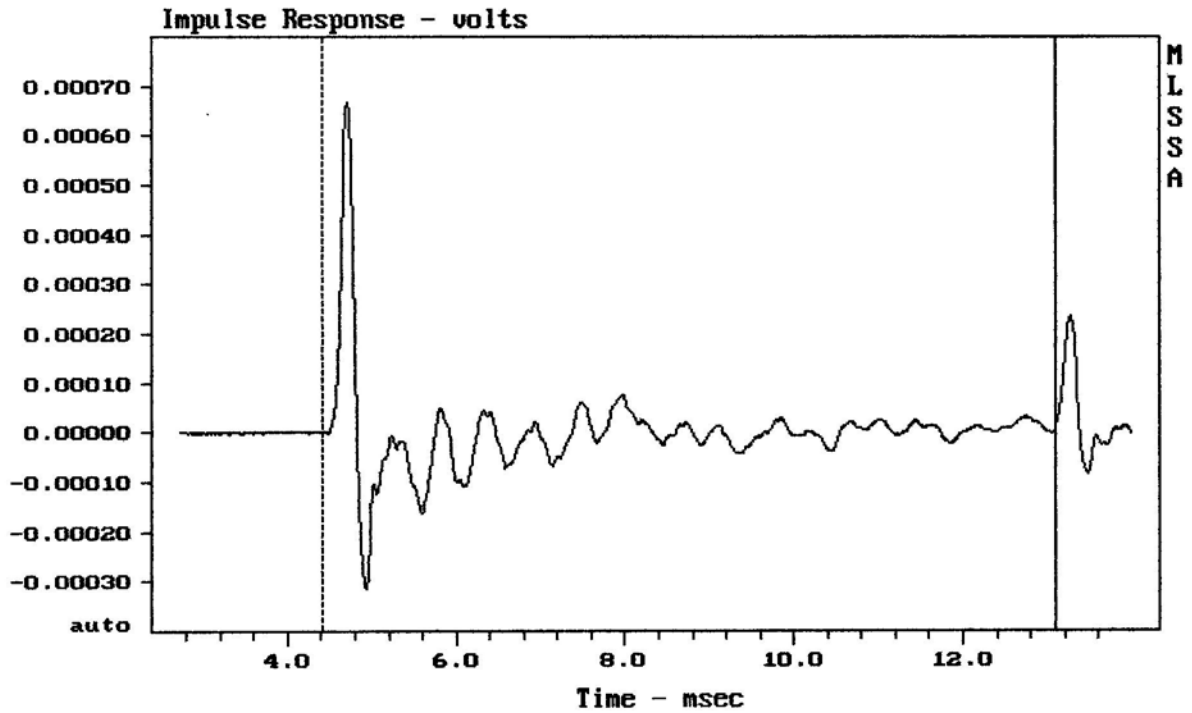

mean: -3.402e-008, rms: 9.289e-005, std: 9.289e-005, max: 0.0006684, min: -0.0

SELENIUM 15PW5